



Plunger Pumps


Low Flow Models (2 to 6 GPM)

CAT PUMPS® TRIPLEX PLUNGER PUMPS are designed to deliver smooth, low pulsation flows at a wide variety of pressures and flow rates. Widely used in continuous-duty, high pressure applications including Car/Truck Wash, Industrial Cleaning, Pressure Washing, Reverse Osmosis, Water Misting and many more.



CAT PUMPS® are the "Pumps with Nine Lives". **Standard Features include:** High pressure seals that are lubricated and cooled by the solution being pumped • Oil-bath crankcase • Heat treated valves and seats • Forged brass or stainless steel manifolds • Solid ceramic plungers • Exclusive high pressure seal design • Rated from 140° to 160° F. depending on the model. Seal options up to 180° F. available • Wet ends can be serviced without entering the crankcase. • Pumps are rated to 50 micron particles and 5-9 ph. **Note:** Mounting rails and mounting kits are not included and must be ordered separately).

Low Flow pumps are rated from 3 to 6 GPM. See following page for high flow models.

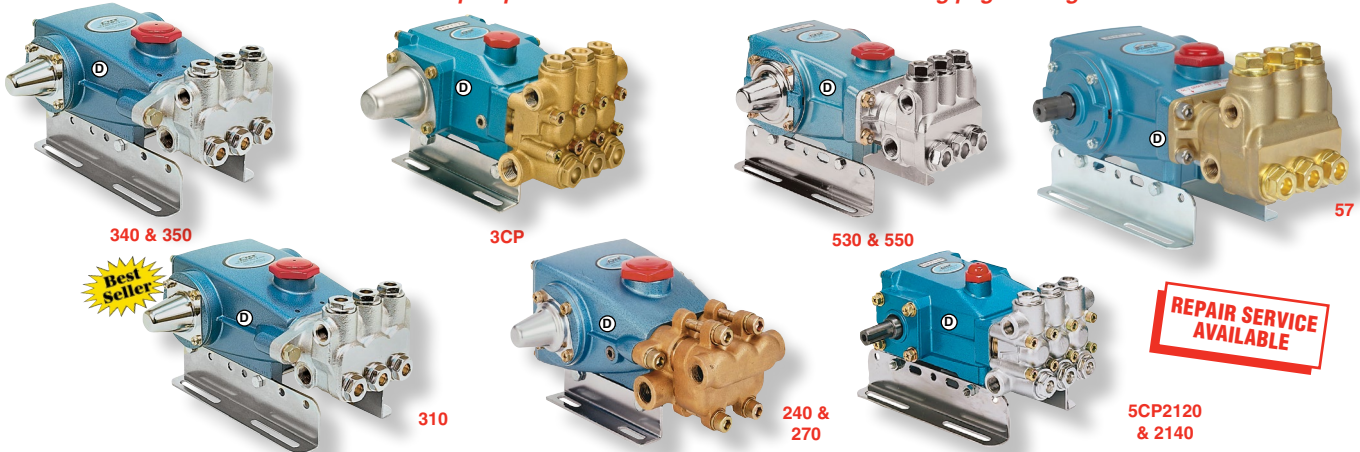

Part No.	GPM	PSI	RPM	Inlet	Outlet	Shaft	Wt.	Mounting Kit
CC 230	2.3	1500	1725	1/2"	3/8"	16.5mm	13 lbs.	*30612
CC 5CP4114CSS	3.2	4000	1725	1/2"	3/8"	20mm	20 lbs.	30659
CC 240	3.6	1200	1725	1/2"	3/8"	16.5mm	13 lbs.	*30612
CC 270	4.2/3.5	1000/1500	1725/1420	1/2"	3/8"	16.5mm	15 lbs.	30651*30612
CC 60	4.7	4000	1720	1/2"	3/8"	24mm	31 lbs.	*30611
CC 3CP1140	3.6	2200	1725	1/2"	3/8"	16.5mm	15 lbs.	*30612
CC 3CP1140.3400†	3.6	2200	1725	1/2"	3/8"	16.5mm	15 lbs.	*30612
CC 5CP3110CSS	3.6	3500	1750	1/2"	3/8"	20mm	20 lbs.	*30612
CC 310	4.0	2200	950	1/2"	3/8"	20mm	20 lbs.	30659*30611
CC 310B††	4.0	2200	950	1/2"	3/8"	20mm	20 lbs.	30659*30611
CC 310S**	4.0	2200	950	1/2"	3/8"	20mm	20 lbs.	30659*30611
CC 340	4.0	1800	1725	1/2"	3/8"	20mm	20 lbs.	*30611
CC 340B††	4.0	1800	1725	1/2"	3/8"	20mm	20 lbs.	*30611
CC 5CP2120W	4.0	2500	950	1/2"	3/8"	20mm	20 lbs.	30659*30611
CC 5CP2120W.3400†	4.0	2500	950	1/2"	3/8"	20mm	20 lbs.	30659*30611
CC 5CP2120B††	4.0	2500	950	1/2"	3/8"	20mm	20 lbs.	30659*30611
CC 5CP2140W	4.0	2500	1750	1/2"	3/8"	20mm	20 lbs.	*30611
CC 5CP2140B††	4.0	2500	1750	1/2"	3/8"	20mm	20 lbs.	*30611
CC 5CP4118CSS	4.2	4000	1725	1/2"	3/8"	20mm	20 lbs.	*30611
CC 3CP1120	4.2	2200	1725	1/2"	3/8"	16.5mm	20 lbs.	*30612
CC 3CP1120.3400†	4.2	2200	1725	1/2"	3/8"	16.5mm	20 lbs.	*30612
CC 5CP3160CSS	4.3	3500	1750	1/2"	3/8"	20mm	20 lbs.	*30612
CC 45	4.5	3500	1645	1/2"	3/8"	20mm	20 lbs.	*30611
CC 5CP3120	4.5	3000	1750	1/2"	3/8"	20mm	20 lbs.	*30612
CC 5CP3120.3400†	4.5	3500	1645	1/2"	3/8"	20mm	20 lbs.	*30612
CC 5CP4120CSS	4.5	3500	1645	1/2"	3/8"	20mm	20 lbs.	*30611
CC 57	4.5	4000	1285	1/2"	3/8"	24mm	20 lbs.	30660*30611
CC 700	4.7	5000	1750	1/2"	3/8"	24mm	20 lbs.	*30611
CC 60	4.7	4000	1750	1/2"	3/8"	24mm	31 lbs.	*30611
CC 350	5.0	1500	1725	1/2"	3/8"	20mm	20 lbs.	*30611
CC 5CP2150W	5.0	2000	1725	1/2"	3/8"	20mm	20 lbs.	*30611
CC 530	5.0	2500	1100	1/2"	3/8"	24mm	20 lbs.	30660*30611
CC 550	5.0	3000	1415	1/2"	3/8"	24mm	20 lbs.	30660*30611
CC 5CP3150CSS	5.2	3000	1750	1/2"	3/8"	20mm	20 lbs.	30611
CC 1570	6.0	6000	1350	1/2"	3/8"	30mm	68 lbs.	*30613
CC 5CP5120	6.0	2500	1750	1/2"	3/8"	20mm	20 lbs.	*30611
CC 5CP5120.3400†	6.0	2500	1750	1/2"	3/8"	20mm	20 lbs.	*30611
CC 5CP5140	6.4	3000	1750	1/2"	3/8"	20mm	20 lbs.	*30611

* Mounting Rails Only. ** Features Stainless Steel Sleeves in Manifold. † Rated to 200° F., Run Dry Feature. †† Manifold features Lifetime Warranty against washout.

OPTIONAL MOUNTING KIT COMPONENTS

30651 Includes 30612 mounting rails, 30246 pulley (5" diameter) & key and a 25130 shaft protector cover.

30659 Includes 30611 mounting rails, a 30633 pulley (8" diameter) and a 118672 shaft protector cover.

30660 Includes 30611 mounting rails, 30206 pulley (9.75" diameter), 43256 shaft protector cover, 33000 hub (24mm) and a 30067 key.

**Call Toll-Free for
Current Prices !**