



## Flex Wand Extensions



**Flexible Spray Gun Extensions** are Plated, Galvanized or Stainless Steel extensions with flexible center section. Available in 18" or 24" lengths. Inlet port is 1/4" MPT. Outlet port is 1/4" MPT x 1/8" FPT (for male or female nozzles) except 291P which is a 1/8" FPT only. Maximum operating pressure is 2250 PSI. Maximum operating temperature is 200° F. Blue or Black covers.

Part No.	Material	Length	Cover
BC 291P-18	* Plated	18"	Blue
BC 291P-18BK	* Plated	18"	Black
BC 291G-18	Galvanized	18"	Blue
BC 291G-18BK	Galvanized	18"	Black
BC 291G-18RD	Galvanized	18"	Red
BC 291G-24	Galvanized	24"	Blue
BC 291G-24BK	Galvanized	24"	Black
BC 291S-18	Stainless	18"	Blue
BC 291S-18BK	Stainless	18"	Black
BC 291S-24	Stainless	24"	Blue

\* Outlet is 1/8" FPT Only - USA.

## Flexible Spring Wand



**Flexible Wand Extensions** with heavy-duty spring. Designed to allow for easily cleaning under wheel wells, bumpers, etc. Overall length is 15". Ports are 1/4" MPT x 1/8" F nozzle protector.

Part No.	Length
BC 299S Flex Wand	16"

## SUTTNER Insulated Grips

Used with existing spray wands. All grips can be used on any 1/4" wand pipe, extension or barrel.

**ST009** Handles. Lances slide through the opening at the top giving you a comfortable handle. Tighten when in place.

**ST9** is a 14", 2-piece, molded plastic, vented cover that is assembled over the existing pipe for operator protection. Rated to 300° F.

**ST9H** is a combination of the ST009 and the ST9 that gives you a hand grip and insulated cover. Rated to 300° F. For 1/4" lances.



Part No.	Description
NP ST009	Plastic Handle for 1/4" Lance Extensions
NP ST009-1/2	Plastic Handle for 1/2" Lance Extensions
NP ST9	14", 2-Piece, Vented Grip.....
NP ST9H	Grip with Side Handle.....


## Insulated Wand Grips



**Insulated Fore Grips:** Molded urethane grips. Constructed to fit 1/4" gun extension wands. Provides insulation when spraying hot liquids.

Part No.	Length
BC 258	6"
BC 259	11"

## Adjustable High Pressure Wand Extension Assemblies



**Extensions/Gun/Hose Assemblies** designed for use with pressure washers to effectively clean to 24' while still on the ground. Great for cleaning siding, windows, buildings, etc.

Extensions feature trigger spray gun, high pressure hose and adjustable extension, (**Nozzles not included**). Units are assembled and ready to hook-up to your pressure washer. Rated to 4000 PSI. Available in 3 sizes.

**Features:** Units assembled and ready to hook-up • Trigger spray gun • High pressure hose • a • Adjustable extension  
 • Rated to 10 GPM • Rated to 4000 PSI  
 • Rated to 195° F.

D20015 Support Belt




Part No.	Size	Wt.
DU 612EX	6'-12' Adjustable Extension Assembly	9 lbs.
DU 618EX	6'-18' Adjustable Extension Assembly	11 lbs.
DU 624EX	9'-24' Adjustable Extension Assembly	14 lbs.
IP D20015	Support Belt for 612EX / 624EX	-

## High Reach Wash Pole

Highest Rated On The Market!

**HydroTek High Reach Wash Pole** is ideal for high reach cleaning up to 25 feet. The highest rated cleaning pole on the market. Aluminum 3-piece construction offers rigidity that is not found in other telescopic poles or extension wands. Rated to 10 GPM, 4500 PSI & 210° F. Each assembly includes: (3) 6' pole sections, 19' jumper hose, shoulder harness, angled discharge attachment and gun brace holder. **Note:** Trigger wand and M22 twist coupler are not included as they are usually supplied on most pressure washers. Available if needed.

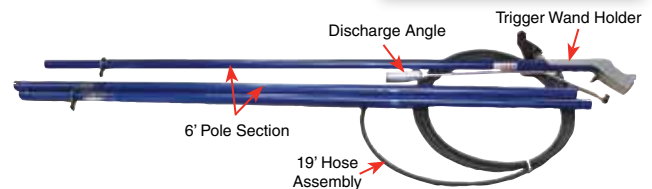

Part No.	Max. Flow	Max. Pressure	Wt.
BI AVW20 Wash Pole Assembly	10 GPM	4500 PSI	14 lbs.
NP ST1500 Wand Only .....	10 GPM	5000 PSI	1.25 lbs.
NP ST40-1/4M M22 Coupler .....	10 GPM	5800 PSI	-

## SUTTNER Push/Pull Spray Lance

Designed for use with high pressure trigger wands. Unique design allows for use as a straight wand or adjustable angles for hard to reach places like wheel wells or gutters. Pulling the insulated grip backward, changes from straight to as much as a 90° angle. Slide the grip forward and it returns to a straight wand. Construction is zinc-plated steel. Rated to 3000 PSI and 300° F. Length is 33". Inlet and outlet are 1/4" FPT.



Part No.	Length
NP ST85	33"