

## Tire Pressure Gauge Accessories


**A810 ACME Ball-Foot Air Chuck:** 1/4" MPT.

**A815 ACME Ball-Foot Air Chuck:** 1/4" FPT.

**A-824 ACME Dual-Foot Extension Chuck:** Closed Check Chuck. For hard-to-get-at valves on tractor, dual-wheel truck and bus tires. 1/4" FPT inlet. Nickel-plated. For use on air hoses and air meters.

**A1501-BL ACME Sight Glass Inflator Gauge:** Makes tire inflation easy. The dual calibrated (*PSI and kPa*) internal pressure reading indicator makes this inflator simple to read. The gauge measures from 10 to 120 lbs. in 2 lb. increments allowing precise control over tire inflation. Dual Heavy-Duty Chuck.

**A825 SCHRADER** Valve stem 1/4" MPT.

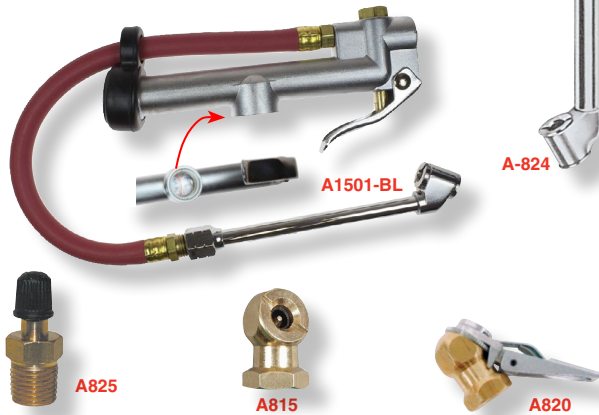

Part No.	Description
AM A810	Air Chuck, 1/4" MPT .....
AM A815	Air Chuck, 1/4" FPT.....
AM A820	Clip On Air Chuck with 1/4" FPT Inlet.....
AM A-824	Extension Air Chuck.....
AM A825	Schrader Valve x 1/4" MPT.....
AM A1501-BL	Sight Glass Style Inflator Gauge, Dual Chuck
AM A1600-PB	Sight Glass Style Inflator Gauge, Straight Chuck

## Air Blow Gun Nozzles

**Heavy-Duty Blow Guns** combine durability, performance and safety to meet your cleaning and drying needs. Available in top mount lever or button styles or plastic pistol style. Brass safety nozzles are rated to the pressures shown. Rubber nozzles are an ideal choice for protecting against scratches or damage to surfaces.

OSHA compliant depending on style of nozzle that is used. \* (Non-relieving, rubber nozzles are only OSHA compliant if inlet pressure is regulated to 30 PSI maximum).

**Lever Guns** are chrome-plated brass construction rated to 150 PSI. Coated lever with 1/4" FPT inlet. Available with brass or \*rubber nozzles.

**Pistol Grip Guns** feature a light-weight, nylon or metal body with brass valve mechanism. Rated to 125 PSI. Inlet is 1/4" FPT. Available with brass or \*rubber nozzles.




Part No.	Style	Nozzle
ZS BG25	Lever	Brass
ZS BG27	Lever	* Rubber
ZS BG47	Pistol	* Rubber
ZS PG2T	Pistol	Brass



## Quick-Connect Air Line Fittings


**DANFOSS/HANSEN Quick-Connect Couplings** provide the fastest, easiest, and most reliable means of joining air lines and tools. Automatic coupling, easy disconnect and positive air shut-off. Coupling bodies are brass, Plugs are plated steel. All fittings are of the popular "Industrial Interchange" design. Rated to 150 PSI.

Part No.	Description
EV DCB20	1/4" FPT Female Coupler .....
EV DCB26	3/8" FPT Female Coupler .....
EV DCB10	1/2" FPT Female Coupler .....
EV DCP20	1/4" FPT Female Plug.....
EV DCP26	3/8" FPT Female Plug .....
EV DCP18	1/2" FPT Female Plug.....
EV DCP21	1/4" MPT Male Plug .....
EV DCP25	3/8" MPT Male Plug .....
EV DCP17	1/2" MPT Male Plug.....

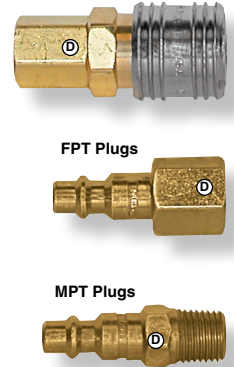

## Air Relief Valves - Vents to Atmosphere -

**Compact Air Safety Relief Valves** with test rings. Factory preset pressure settings from 20-300psi, (*KSV25 rated to 450 PSI*). All models ASME rated. Brass or stainless available in all models. Other sizes and pressure settings from those shown are readily available. All valves have Mpt inlet. **KSV Series** valves have soft seats, 112 and 118 series have hard seats.



Part No.	Inlet	Body	CFM	Setting
KG KSV10-2-100	1/4" MPT	Brass	35	100 PSI
KG KSV25-2-175	1/4" MPT	Brass	150	175 PSI
KG KSV30-4-150	1/2" MPT	Brass	340	150 PSI
KG 112CSS-2-150	1/4" MPT	Brass	90	150 PSI
KG 112CR-2-150	1/4" MPT	Stainless	90	150 PSI
KG 118CSS-2-150	1/4" MPT	Brass	90	150 PSI
KG 118CSS-4-150	1/2" MPT	Brass	275	150 PSI

## Water Spout Faucet

### Trigger Activated Water Spout Faucet

is a common replacement item on water/air machines. 1/4" FPT inlet with flexible rubber outlet. Overall size is 5-1/4". Plated brass construction with flexible rubber discharge.



Part No.	Description
AA 8647	Water Nozzle.....



## Air Compressor Drain Valves (Automatic with Timer)

Automatic drain valve works with all types of air compressors to remove moisture and condensate from tanks or air lines. Brass body with strainer and built-in ball valve. Coil is IP65, 110volt, 50/60Hz. Timer can be set to open every 1-45 minutes and close after 1-10 seconds. Standard with 6ft power cord. Ports are 1/2" MPT inlet and 1/2" FPT outlet.



Part No.	Style	Wt.
KG KTDSB24	Automatic drain valve, 110volt	1 lb.