






## FLOMAX Pedestal Pumps

1-1/2" • 2" • 3"

- Self Priming
- Viton® Ceramic Seals
- Stainless Fasteners
- Cast Iron Construction
- Cast Iron Impeller
- Stainless Steel Shaft Sleeve

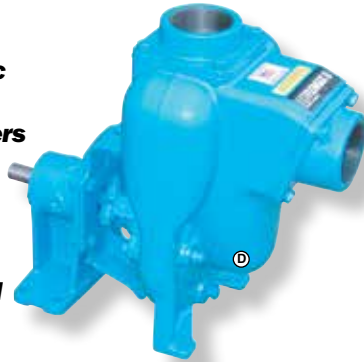

These basic pumps include a Bearing Pedestal and base. They can be long coupled to an electric motor or gasoline engine or can be belt driven. Bearing Pedestals are also available with electro magnetic or manual clutch drives, shown on adjacent pages. Components can be supplied for field assembly or they can be shipped as a ready to use unit. *Stainless steel available.*

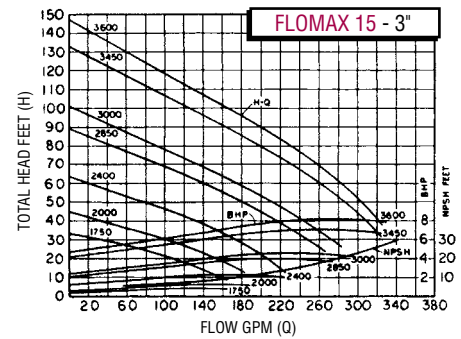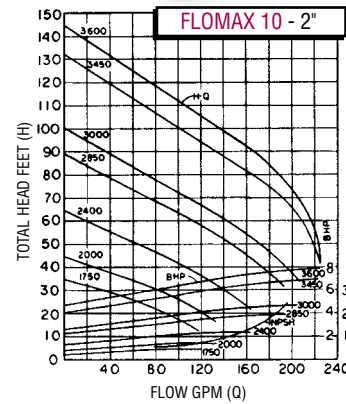


Part No.	Series	Ports	Construction	Shaft Diameter	HP Req'd Water	Req'd Fert.	Wt. Lbs.
MX 21312	FLOMAX 5	1-1/2" FPT	Cast Iron	3/4"	3	5	44
MX 21339	FLOMAX 8	2" FPT	Cast Iron	3/4"	3	5	44
TK 200PBI	BANJO *	2" FPT	Cast Iron	3/4"	3	5	44
MX 36061	FLOMAX 8	2" FPT	Cast Iron with Sil-Carbide Viton® Seal	3/4"	3	5	44
MX 33961	FLOMAX 8	2" FPT	# Cast Iron with Double Seal	3/4"	5	7.5	44
MX 21363	FLOMAX 10	2" FPT	Cast Iron	1"	7.5	10	85
MX 21381	FLOMAX 15	3" FPT	Cast Iron	1"	7.5	10	85
MX 32031	FLOMAX 15	3" FPT	# Cast Iron with Double Seal	1"	10	15	85

# 33961 & 32031 have Double Seal - Can be run dry. Also available for C-Face or Engine Drive . \* BANJO Brand.



## MP PUMPS

- Hydraulic Motor Drive
- Pedestal Pump
- Self-Priming - Centrifugal
- Cast Iron Construction
- Viton® Ceramic Seals
- Stainless Fasteners

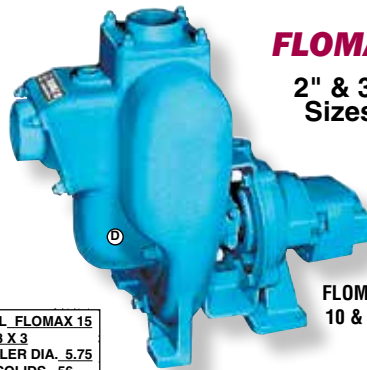

FLOMAX  
2" & 3"  
Sizes

FLOMAX  
10 & 15

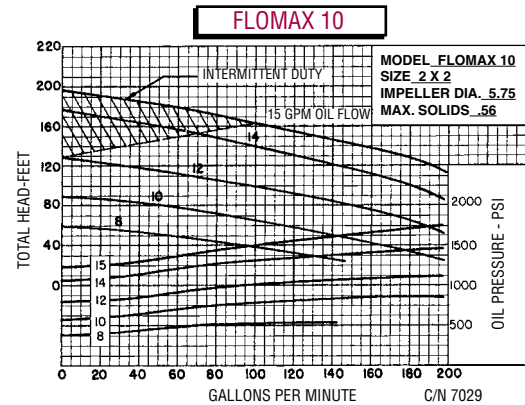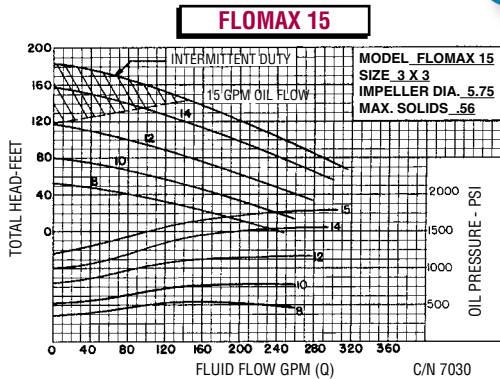

**FLOMAX Hydraulic Driven Self-Priming Centrifugal Pumps** are capable of pumping a wide variety of liquids at capacities up to 300 GPM, heads to 130 feet and lifts to 25 feet. Cast iron with removable flanges, replaceable wear plates and S.S. fasteners are standard. *(S.S. Available).*

**MP Hydraulic Motor Units** can also be adapted to Flomax Pumps that are equipped with the proper mounting attachments; call with pump model numbers.

**Note: Your hydraulic system must match hydraulic motor specifications shown — DO NOT OVERSPEED.**

Viton® is a registered trademark of DuPont Performance Elastomers

Part No.	HYDRAULIC PEDESTAL & MOTOR	Wt.
MX 36447	Hydraulic Pedestal Drive/Flomax 5/8 ..	16 lbs.
MX 28551	Hydraulic Pedestal Drive/Flomax 10/15	29 lbs.


  

Part No.	HYDRAULIC MOTORS & REPAIR KITS	Seal Kit
MX 28544	Parker Ultra Motor for Flomax 10/15 ...	MX 30045
PA 8301	Motor Seal Repair Kit for 28544 Motor	-

### HYDRAULIC PUMP/MOTOR UNITS COMPLETE

Part No.	Ports	Motor Dispense/Rev.	Motor Max. Oil flow	Max. Oil PSI	Wt.	
MX 35272	FLOMAX 8	2"	.37 cu. in.	9 GPM	2,000 PSI	48 lbs.
MX 28552	FLOMAX 10	2"	.73 cu. in.	15 GPM	2,000 PSI	92 lbs.
MX 28553	FLOMAX 15	3"	.73 cu. in.	15 GPM	2,000 PSI	96 lbs.
MX 34223 †	FLOMAX 15	3"	.73 cu. in.	15 GPM	2,000 PSI	96 lbs.

\* 2" FPT Ports on Pump; No Flanges. † 34223 is Double Seal.

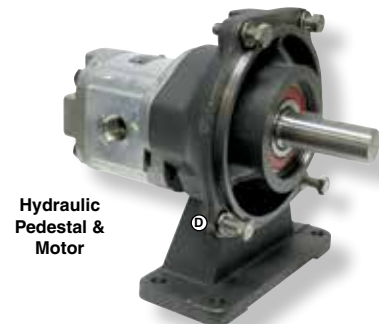

Hydraulic Pedestal & Motor