

Scot Centrifugal Transfer Pumps



FP57-25

FEATURES: 4" x 3" Flanged Connections • All Iron Construction • Viton® Mechanical Seal • Stainless Shaft Sleeve • 1-3/8" Shaft • Available as a Bare Pump or Base Mounted Unit with TEFC 3-Phase Motors • A Heavy Duty Pump for Plant Use.




4" Flanged Inlet
3" Flanged Discharge

FP57

Scot 57 Series - 4x3 Straight Centrifugal Pedestal Base 3500 RPM • Cast Iron

Scot Pump
A Division of Amco Corporation

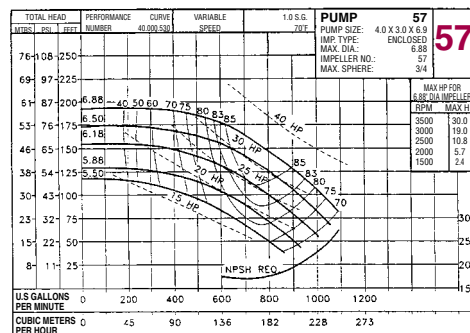

Part No.	S.G.	Max. Imp.	Wt. Lbs.
SC FP57	*Pedestal Base Pump Only	5-7/8"	190
DU FP57-20	4X3 20 HP Scot Pump Unit	1.33	5-1/4" 520
DU FP57-25	4X3 25 HP Scot Pump Unit	1.33	5-7/8" 640
DU FP57-30	4X3 30 HP Scot Pump Unit	1.5	5-7/8" 770
DU FP57-40	4X3 40 HP Scot Pump Unit	1.33	6-1/2" 840

VITON® Seal: 101-000-191
Viton® Repair Kit 57 Pumps: 118-000-383A * Other impeller sizes are available.

Scot FPS56 / 556 Series


4x3 & 3x3 Flanged and FPT Pump Units for Plant Use
3500 RPM • Cast Iron

FEATURES: All Iron Construction • Cast Iron Bearing Flange • Double Sealed Ball Bearings • Viton® Mechanical Seal • Stainless Shaft Sleeve & Hardware • Severe Duty Seal Option • Available as Bare Pump or Base Mounted with TEFC 3-Phase Motor & LoveJoy S Flex Drive.




FP56F Series

Scot Pump
A Division of Amco Corporation

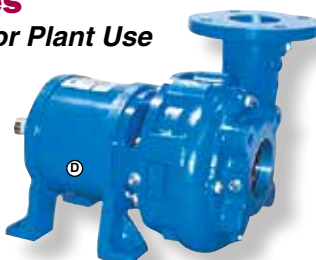

FPS56FA

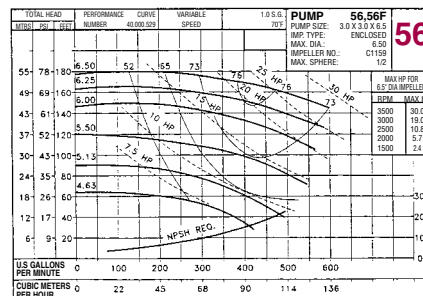

Part No.	Pump Size	Shaft Size	Max. Flow	Max. S.G.	Imp.	Use with 3500 RPM Motor for S.G.** Shown:
SC FPS556A	* 4" x 3" FPT	1-1/8"	500	—	5-1/4"	15 HP (1.36 S.G.)
SC FPS56FA	* 3" x 3" Flanged	1-1/8"	500	—	5-1/4"	15 HP (1.36 S.G.)
SC FPS56FB	* 3" x 3" Flanged	1-1/8"	540	—	5-1/2"	20 HP (1.43 S.G.)
SC FPS56FC	* 3" x 3" Flanged	1-1/8"	560	—	5-7/8"	25 HP (1.33 S.G.)
SC FPS56F	* 3" x 3" Flanged	1-1/8"	600	—	6-1/2"	40 HP (1.45 S.G.)
DU FP56-15	4"x3" FPT, 15 HP, 3-Ph. Pump Unit		1.36	5-1/4"		Motor Included
DU FP56F-15	3"x3" Flanged, 15 HP, 3-Ph. Pump Unit		1.36	5-1/4"		Motor Included
DU FP56F-20	3"x3" Flanged, 20 HP, 3-Ph. Pump Unit		1.33	5-1/2"		Motor Included
DU FP56F-25	3"x3" Flanged, 25 HP, 3-Ph. Pump Unit		1.33	5-7/8"		Motor Included
DU FP56F-25A	3"x3" Flanged, 25 HP, 3-Ph. Pump Unit †		1.70	5-1/2"		Motor Included
DU FP56-25	4"x3" FPT, 25 HP, 3-Ph. Pump Unit		1.33	5-7/8"		Motor Included


* Pump Only. VITON® Seal: 101-000-191 Viton® Repair Kit 56 Pumps: 118-000-344A
** S.G. = Lbs./Gal. of Liquid+8.34 † Use FP56F-25A for 10-34-0 & other extra heavy fertilizer grades.

Scot 95 / 96 Series

Straight Centrifugal Pumps - 6x4 & 6x5

1750 RPM • Cast Iron

FEATURES: 6" x 4" and 6" x 5" Flanged Ports • All Iron Construction • Cast Bearing Frame • Double Sealed Ball Bearings • Stainless Sleeves • Viton® Seal (severe duty seals available) • 1-3/8" Shaft • 10.25 Impeller • 1750 RPM.


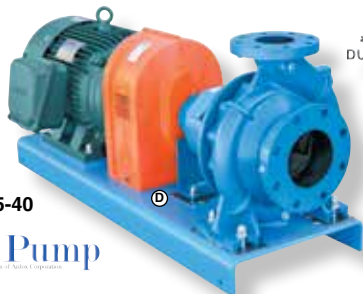


FP95-40

Scot Pump
A Division of Amco Corporation



FP 96

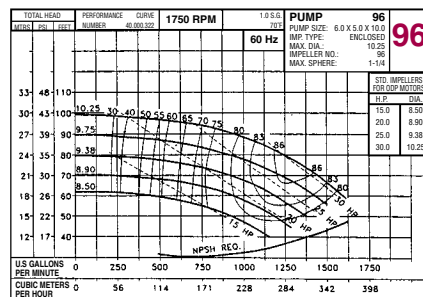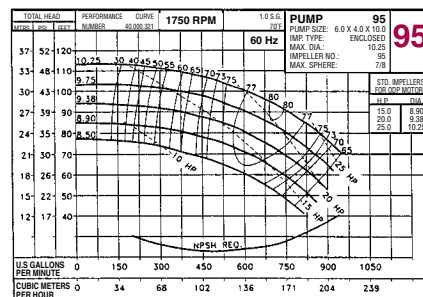

Part No.	Description	Wt.
SC FP95	6X4 Pedestal Pump ONLY	286 lbs.
SC FP96	6X5 Pedestal Pump ONLY	320 lbs.
DU FP95-40	6X4 Flanged - 40 HP Pump, 1.50 Max. S.G.	1005 lbs.
DU FP96-40	6X5 Flanged - 40 HP Pump, 1.33 Max. S.G.	1020 lbs.

Viton® is a registered trademark of DuPont Performance Elastomers