

Hot Water Generators

Now you can have instant hot water from your cold water washer anytime you want it!

Simply attach a "Hot Box" Hot Water Generator to your cold water pressure washer for instant hot water. Easily disconnected if you wish to go back to cold water cleaning. Available in sizes from 240,000 to 1,040,000 BTU's. Units will develop at least **120° F. temperature rise** above incoming water temperatures at the maximum flow rates shown. (Lower flow rates will increase output water temperatures accordingly).



Series	Width	Length	Height
240	22"	22"	56"
430	22"	22"	56"
560	22"	22"	50"
1010	30"	36"	64"

Standard Features: Automatic burner shutdown • Adjustable thermostat control • Schedule 80 Pipe • Flow switch • Kerosene, Diesel, Natural or LP Gas Fired • 110-Volt, 12-Volt or Millivolt burners (Millivolt system creates its own electricity from thermocouple and pilot) • Quick Couplers • Heavy gauge construction • Pressure Relief Valve • Fuel Tank on Oil-Fired Units • On-Off switch • 5 Year prorated coil • Optional draft diverters.

Part No.	BTU	†GPM	Max. PSI	Fuel	Voltage	Wt. Lbs.
DU 240	240,000	2.2	4000	Oil	110-Volt	400
DU 430	430,000	4.0	4000	Oil	110-Volt	520
DU 560	560,000	5.0	4000	Oil	110-Volt	545
DU 1010	1,010,000	10.0	4000	Oil	110-Volt	900
DU 240G	240,000	2.2	3500	* Nat/LP	Milli-Volt	400
DU 375G	375,000	4.0	3500	* Nat/LP	Milli-Volt	425
DU 500G	500,000	5.0	3500	* Nat/LP	Milli-Volt	460
DU 1040G	1,040,000	10.0	3500	* Nat/LP	Milli-Volt	1095
DU Z01-00100	Draft Diverter as Add On for 3 & 4 GPM					
DU Z01-00101	Draft Diverter as Add On for 5-10 GPM.....					
DU 12VB	12-Volt Burner in place of 110 volt up to 360,000 BTU					
DU 12VB1	12 Volt Burner in place of 110 volt up to 560,000 BTU & Larger...					
DU 12EIG	Electronic Ignition as Add On.....					

* Specify Natural Gas or LP Gas on These Units.
† Maximum Gallons Per Minute with a 120° F. Temperature Rise.

Little Giant Coil Cleaning Unit
"Your Solution Innovator"

A complete pump, hose and tank package for use with Coil Cleaning Acids. Ideal for descaling coils on water heaters, hot water generators and heat exchangers. This unit has the Little Giant Model 2-MD-SC magnetic-driven pump and motor unit with leak-proof, seal-less design.



Pump Features:

Polypropylene head and impeller, nitrile O-ring and is rated to 150° F. Maximum viscosity is 100 SSU. Voltage is 115 Volt AC, 1 Phase. Overall dimensions are 8" x 11" x 17".


Package Includes:

5 gallon tank with cover as well as tubing and connection fittings.

Part No.	Max. Flow	Max. Pressure	Wt.
GJ GKPK-SC	8.5 GPM	6.3 PSI	10 lbs.

Wanner Pump Units

Featuring Hydra-Cell Diaphragm Pumps

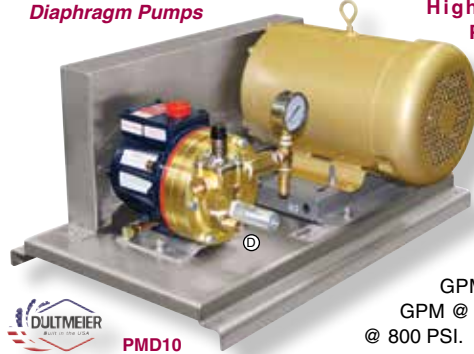

High Volume, High Pressure Pumping Units featuring Wanner Hydra-Cell Diaphragm Pumps. Ideal for use with slurries, viscous products and hard-to-handle chemicals. Models are available in 18 GPM @ 1000 PSI, 20 GPM @ 1000 PSI or 36 GPM @ 800 PSI.

WANNER ENGINEERING INC


Standard Features: Hydra-Cell Pump • TEFC 3-phase Motor • Heavy-gauge Baseplate • Pressure Bypass Valve • Pulleys and V-Belts • Belt Guard • Belt Tightener • Pressure Gauge • Pre-plumbed • All motors are 208/230/460 Volt, 3 phase. (Single phase motors available on special request.)

Part No.	Flow	Pressure	HP	Wt. Lbs.
DU PMD10	8 GPM	1000 PSI	7-1/2	245
DU PMD25	20 GPM	1000 PSI	15	575
DU PMD40	* 36 GPM	800 PSI	20	900

* With 25 HP Option, Rated to 1000 PSI.

Medium & High Pressure Pumping Units

Pumping Units for Industrial Cleaning, Rinse Arches or Multiple Gun Cleaning Stations.

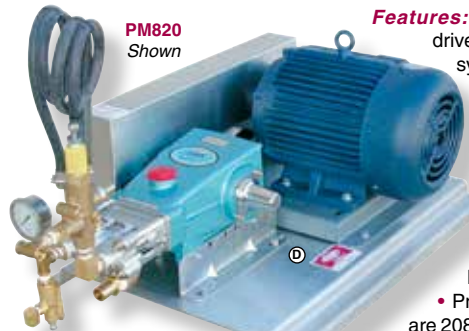

Features: Cat Pumps® belt driven by Baldor Motors. All systems include: • Pump • Motor • Pressure Regulator Valve • V-Belts • Pulleys • Belt Tightener • Pulsation Dampener (Not on all units) • Pressure Gauge • Belt Guard • Heavy gauge Baseplate • Pre-plumbed • All motors are 208/230/460 Volt, 3 phase. (1 Phase available on 5, 7.5 & 10 HP only for special quote.)

Note: Motor starters and electrical panels are available as an option if required.

Medium Pressure-High Flow				Motor	Wt.
Part No.	Pump	GPM	PSI	HP	Lbs.
DU PM390	Cat	12	600	5	175
DU PM623	Cat	6	1200	5	260
DU PM820	Cat	10	1000	7-1/2	225
DU PM1010	Cat	12	700	7-1/2	225
DU PM1050-15	Cat	12	1800	15	400
DU PM1520	Cat	15	1000	10	280
DU PM2520	Cat	25	800	15	400
DU PM3535	* Cat	30	1000	20	625

High Pressure-Low Flow				Motor	Wt.
Part No.	Pump	GPM	PSI	HP	Lbs.
DU PM550	* Cat	4.5	3000	10	300
DU PM540	* AR	4.0	4000	15	350
DU PM570	* Cat	4.2	4000	15	350
DU PM650	* Cat	7	3000	15	350
DU PM660	* Cat	10	3000	20	350
DU PM70	* Cat	4.5	5000	15	350

* No Pulsation Dampeners on These Units

FREE FREIGHT
On Orders \$1800 Or More
* See Inside Back Cover for Exclusions