



Hannay Hose Reels in Hand Crank or 12 Volt DC Rewind. Ideal for pressure washers, lawn care, tree spraying, etc. Spools turn on self-aligning bearings. Frames, drum and fasteners are fabricated with heavy gauge steel. Reels will handle most liquid products to temperatures of +225° F. and pressures to 3000 PSI. Painted enamel finish and AFLAS seals. **Note: Also available with 304 stainless internals and special EPDM Seals for DEF.**



Part No.	Hose Size I.D.	REWIND	Ship Wt.
HN 1014-14-16	1/4" & 3/8"	Hand Crank	27 lbs.
HN MS1014-14-16	1/4" & 3/8"	Hand Crank	22 lbs.
HN 1020-14-16	1/4" & 3/8"	Hand Crank	31 lbs.
HN 1520-17-18	3/8" & 1/2"	Hand Crank	50 lbs.
HN E1520-17-18	3/8" & 1/2"	12-Volt DC	68 lbs.
HN 1526-17-18	3/8" & 1/2"	Hand Crank	50 lbs.
HN E1526-17-18	3/8" & 1/2"	12-Volt DC	68 lbs.
HN 1536-17-18	3/8" & 1/2"	Hand Crank	70 lbs.
HN E1536-17-18	3/8" & 1/2"	12-Volt DC	95 lbs.
HN 1836-17-18	1/2" & 3/4"	Hand Crank	70 lbs.
HN E1836-17-18	1/2" & 3/4"	12-Volt DC	95 lbs.
HN 4028-17-18	1/2", 3/4" & 1"	Hand Crank	63 lbs.
HN E4028-17-18	1/2", 3/4" & 1"	12-Volt DC	81 lbs.
HN E4038-17-18	3/4" & 1"	12-Volt DC	130 lbs.

Part No.	REPLACEMENT PARTS
SE 5023	1/2" Super Swivel
SE 5033	3/4" Super Swivel
SE 5043	1" Super Swivel
SE SS8KIT	1/2" Super Swivel Repair Kit
SE SS16KIT	1" Super Swivel Repair Kit

Hand Crank Models: Crank is permanently attached on 1000 & 1500 series but can be removed on Model 4028-17-18.

Electric Models: Equipped with a 12-Volt DC motor with chain & sprocket drive. Hand cranks are not included on electric models. Standard in LT (Left Top) - Inlet & Motor on left & outlet on Top Left.

Swivel Repair Kits: Kits include all necessary O-rings, seals and washers for a complete swivel overhaul. High-quality replacement of original parts.

SERIES	FPT INLET PORTS	OUTLET PORTS
1000	1/2" FPT	3/8" FPT
1500	1/2" FPT	1/2" FPT
1800	1" FPT	3/4" FPT
4000	1" FPT	1" FPT

MODEL NO.	HOSE CAPACITIES IN FEET				MAX. DIMENSIONS		
	I.D. 3/8"	1/2"	3/4"	1"	* WIDE	DEEP	HIGH
HN MS1014-14-16	75'	—	—	—	16-1/2"	14"	14-3/4"
HN 1014-14-16	100'	—	—	—	19"	14"	15-3/4"
HN 1020-14-16	175'	—	—	—	25"	14"	15-3/4"
HN E1520-17-18	275'	200'	—	—	24-1/2"	19"	18"
HN E1526-17-18	450'	325'	—	—	30-1/2"	19"	19"
HN E4028-17-18	—	325'	135'	70'	35"	19"	19"
HN E4038-17-18	—	—	200'	100'	47"	19"	18-1/8"
HN E1536-17-18	700'	475'	†200'	—	40-1/2"	19"	18-1/8"
HN E1836-17-18	—	475'	200'	—	43-1/2"	19"	18-1/8"


* Length = Hand Crank (Longest). † 1/2" Inlet & Outlet.



Spray Non-Corrosive (SNC) Series Reels

Hannay Spray Non-Corrosive (SNC) Series reels, constructed primarily of 304 grade stainless steel, are designed specifically for lawn care, agriculture, horticulture, pest control and other spray related industries.

Competitively priced and comparable in weight to aluminum construction, the SNC Series provides a significant advantage in strength and protection in corrosive environments. These reels are designed to handle a variety of applications, including water, pesticides, fertilizer mixes and deicing liquids. Available in both crank and electric-powered rewind, other options include 4-way roller guides, as well as lightweight aluminum reel stacking kits.

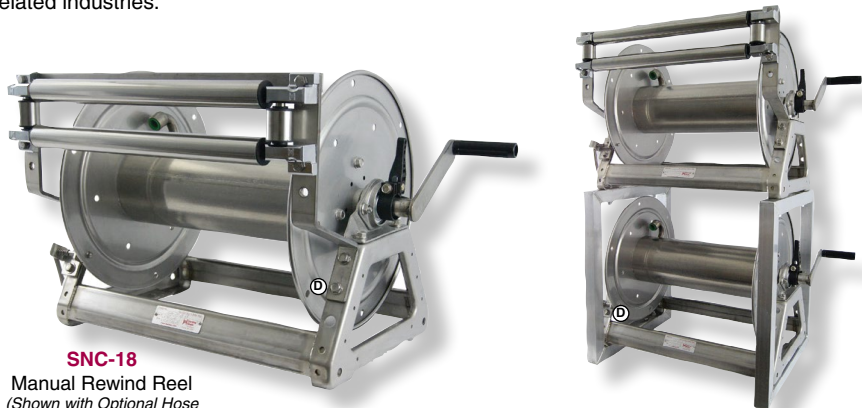

SNC-18
Manual Rewind Reel
(Shown with Optional Hose Guide Roller Assembly)

SNC-18
Manual Rewind Reels
(Shown with Optional Stacking Frame & Optional Rollers)

STANDARD FEATURES:

To Handle Single 3/8" thru 5/8" I.D. Hose

- Lightweight, low profile reels designed for hose lengths up to 500 ft.
- Mostly 304 SST construction, including discs, axle hub and welded frame.
- Non SST components: Drum (Aluminum), swivel joint, bearings (Nickel Plated).
- Manual (direct crank) reels include both pin lock & 3-position camlock drag brake.
- Electric rewind reels (denoted by letter "E" at end of model) feature plated chain/sprocket drive with guard.
- Standard Inlet: 90° full flow swivel, 1/2" FNPT thread Stand Outlet: 1/2" FNPT threads.
- Standard pressure rated to 3,000 PSI. Higher pressures available, please call.

OPTIONS:

- Aluminum stackable frame (for manual rewind reels).
- Stainless steel rollers & roller mounting brackets.
- Drum, swivel joint & bearings all upgradable to S.S.
- Power rewind reels: Motor available in 12 or 24VDC, as well as 115VAC.



Part No.	HOSE CAPACITIES IN FEET			* REEL DIMENSIONS		
	I.D. 3/8"	1/2"	5/8"	Length	Depth	Height
HN SNC-12	300'	200'	125'	25.25"	16.5"	18"
HN SNC-18	400'	300'	200'	31.25"	16.5"	18"
HN SNC-22	500'	400'	275'	35.25"	16.5"	18"
HN SNC-12E	300'	200'	125'	22.5"	19"	18"
HN SNC-18E	400'	300'	200'	28.5"	19"	18"
HN SNC-22E	500'	400'	275'	32.5"	19"	18"

* X Indicates Mounting Holes.