



Polypropylene Garden Hose Thread Fittings & Camlocks



Provides a simple and quick way to connect and disconnect garden hoses to spigots, sprinklers, garden hose thread hose nozzles, etc. Constructed of yellow fiberglass reinforced polypropylene for durability and no rust. 150 PSI rating @ 70° F.

Part No.	Description
TK GHMT075F	3/4" GHMT x 3/4" Adapter
TK GHFT075A	3/4" GHFT x 3/4" Adapter
TK GHFT075M	3/4" GHFT x 3/4" MPT
TK GHMT075FPT	3/4" GHMT x 3/4" FPT
TK GHFT075D	3/4" GHFT x 3/4" Coupler
TK GHMT075B	3/4" GHMT x 3/4" Coupler

Garden Hose Shut-Off Valves



These valves are suitable for light duty use. They have Buna Seats and 3/4" GHT threads.

Part No.	Description
TW LA3	SINGLE GHT Valve, Plastic
SM 235	DOUBLE GHT Valve, Plastic
SM 65	SINGLE GHT Valve, Zinc Diecast

Nylon Garden Hose Barbs



Part No.	MGHT	Barb	Std. Pkg.	Std. Pkg. Discount
TW D3414	3/4"	1/4"	25	25%
TW D3438	3/4"	3/8"	25	25%
TW D3412	3/4"	1/2"	25	25%
TW D3458	3/4"	5/8"	25	25%
TW D3434	3/4"	3/4"	25	25%

Nylon Garden Hose Adapters

Part No.	GHT	x	PIPE	Std. Pkg.	Std. Pkg. Discount
EV E3414	3/4"M	x	1/4" MPT	50	25%
TW E3438	3/4"M	x	3/8" MPT	25	25%
TW E3412	3/4"M	x	1/2" MPT	25	25%
TW E3434	3/4"M	x	3/4" MPT	25	25%
TW G3412	3/4"M	x	1/2" FPT	25	25%
TW G3434	3/4"M	x	3/4" FPT	25	25%
TW H34	3/4"F	x	3/4" MPT	25	25%
TW J3412	3/4"F	x	1/2" FPT	25	25%

Nylon Swivel Nuts & Blank Caps • Barbs



Swivel Nuts & Blank Caps		Std. Pkg.	Std. Pkg. Discount
Part No.	Thread	Pkg.	Discount
TW B3400	3/4" GHT Swivel Nut	25	25%
TW B3500	3/4" FPT Swivel Nut	25	25%
TW N34	3/4" FGHT Blank Cap	25	25%
TW W405	Poly Gasket	50	25%


Barbs for Swivel Nuts		Std. Pkg.	Std. Pkg. Discount
Part No.	Barb	Pkg.	Discount
TW C1400	1/4"	25	25%
TW C3800	3/8"	25	25%
TW C1200	1/2"	25	25%
TW C5800	5/8"	25	25%
TW C3400	3/4"	25	25%
TW C3800-90	* 3/8"	50	-
TW C1200-90	* 1/2"	50	-

* Use with B3500 Cap for 90° Outlet on Red Ball Monitors.



Garden Hose Quick Couplings Series 1163 - Garden Hose Threads


No More Threading Nozzles! Unvalved design permits maximum flow with minimum pressure drop. Constructed of brass and stainless steel for extra strength and long life. **Note:** These couplings are designed for low pressure water service only. Do not exceed 200 psi.

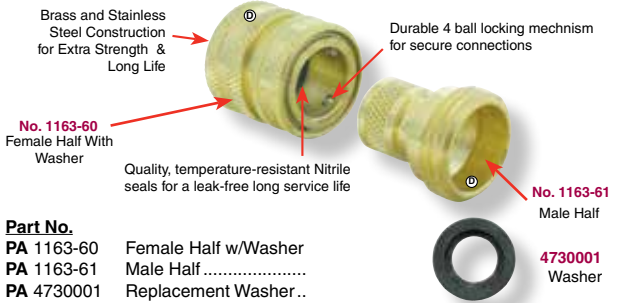

Part No.	Description
PA 1163-60	Female Half w/Washer
PA 1163-61	Male Half
PA 4730001	Replacement Washer..

Brass Adapters

– MGHT Thread X Female Pipe –




Part No.	Male GHT x Female FPT
EV BA794	3/4" MGHT x 1/2" FPT
EV BA796	3/4" MGHT x 3/4" FPT
EV FM1076	3/4" MGHT x 1" FPT

Part No.	Rigid Female
EV BA976	3/4" FGHT x 3/4" FPT




Part No.	Threaded Male
EV BA777	MGHT x MGHT

Part No.	Threaded Male
EV BA73	3/4" MGHT x 3/8" MPT
EV BA74	3/4" MGHT x 1/2" MPT
EV BA776	3/4" MGHT x 3/4" MPT



Part No.	Female GHT x Male MPT
EV BMA974	3/4" FGHT x 1/2" MPT
EV BMA976	3/4" FGHT x 3/4" MPT
EV FM7610T	3/4" FGHT x 1" MPT



Garden Hose Fitting with Check Valve

Garden Hose Coupler with Built-In Check Valve eliminates the need to shut-off a faucet when disconnecting hoses. Stainless steel construction. 3/4" FGHT on both ends. Male plug is open, no check. Rated to 75 PSI.



Part No.	Description
MV 245020	Stainless Garden Hose Coupler with Check Valve
MV 245002	Stainless Garden Hose Plug.....