


DRIP-FREE GunJet for Spot Spraying

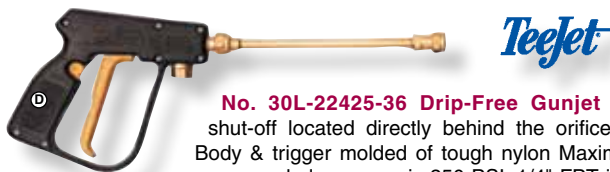

No. 30L-22425-36 Drip-Free GunJet has shut-off located directly behind the orifice tip. Body & trigger molded of tough nylon Maximum recommended pressure is 250 PSI. 1/4" FPT inlet. Gun will accept standard TeeJet tips. **Note:** Replacement tube and tube assemblies are available.

Part No.	Extension Length
SS 30L-22425-8	GunJet..... 8"
SS 30L-22425-18	GunJet..... 18"
SS 30L-22425-24	GunJet..... 24"
SS 30L-22425-36	GunJet..... 36"
SS AB23L-7676	Repair Kit for 23L GunJets.....
SS AB30L	Repair Kit for 30L GunJets.....

Brass & Polypropylene Adjustable Spray Tips




5500 Adjustable Spray Tips have TeeJet Cap threads to fit any GunJet; however, it is primarily used with Drip-free guns for spot spraying. Body rotates for spray selection from wide angle cone to straight stream. Maximum throw at 30 PSI is 30 feet. Brass or polypropylene. Tip settings "A" and "B" on chart below represent two extreme points of rotation in tip adjustment.

Adjustable ConeJet Tip Number	Performance	Liquid Pressure in PSI									
		20 PSI		30 PSI		40 PSI		60 PSI		100 PSI	
		Setting A	Setting B	Setting A	Setting B	Setting A	Setting B	Setting A	Setting B	Setting A	Setting B
5500X1		-	.049	.015	.061	.017	.07	.02	.086	.025	.11
5500X2		.025	.091	.03	.11	.033	.13	.04	.16	.05	.20
5500X3		.037	.13	.045	.17	.05	.19	.058	.23	.073	.30
5500PPB-X3		.05	.18	.058	.22	.067	.25	.08	.31	.10	.40
5500X4		.061	.21	.076	.26	.082	.30	.10	.37	.13	.48
5500X5		.073	.26	.087	.32	.10	.37	.12	.45	.15	.58
5500PPB-X5		.097	.33	.12	.40	.13	.47	.16	.57	.21	.74
5500X6		.12	.42	.15	.52	.17	.60	.21	.73	.26	.94
5500PPB-X6		.15	.49	.18	.60	.20	.69	.24	.84	.31	1.1
5500X8		.17	.55	.20	.67	.23	.78	.29	.95	.37	1.2
5500PPB-X8		.21	.69	.26	.84	.30	.97	.37	1.2	.47	1.5
5500X10		.26	.83	.32	1.0	.37	1.2	.45	1.4	.58	1.9
5500X12		.31	.98	.37	1.2	.43	1.4	.53	1.7	.68	2.2
5500X14											
5500X18											
5500PPB-X12											
5500PPB-X18											
5500X22											
5500X26											

Part No.	Description
SS 5500X3 thru X26	Brass Adjustable Nozzle
SS 5500PPB-X3 thru X18	Poly Adjustable Nozzle

Low Pressure Trigger Valves

Trigger Wand Valves are rated to 2 GPM and 250 PSI. Designed for a variety of spraying applications. Brass or stainless bodies and Bund or Viton® seals. **6590** Series have 1/4" FPT inlet by 1/4" FPT outlet. **6466VI** has 1/4" FPT inlet x cap thread outlet for 5500 Series adjustable nozzles. **6466-4727** has 1/4" MPT grip inlet x cap thread outlet.

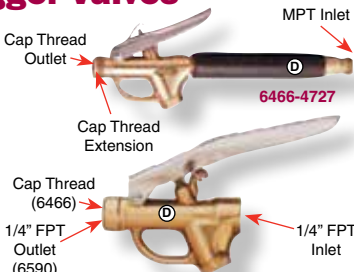

Part No.	Wand Type	Outlet
SS 6590	Brass with Buna Seal	1/4" FPT
SS 6590VI	Brass with Viton® Seal	1/4" FPT
SS 6466VI	Brass with Viton® Seal	Cap Thrd.
SS 6466-4727	Trigger Valve with Grip, 1/4" MPT Inlet	

TeeJet Spray Guns



No. 18AL

18AL is a lightweight 24" aluminum spray gun with 1/4" FPT connection. D6 orifice. **AA2AAL** is a 15" heavy duty aluminum spray gun with 3/4" GHT inlet connection. Operates from 30 to 800 PSI. **AA143ALGH6** is a lightweight 22-1/4" aluminum spray gun with 3/4" GHT inlet connection. D6 Orifice disc is standard, other sizes available. Operates from 30 to 800 PSI.

Part No.	Connection
SS 18AL	20" Aluminum Spray Gun..... 1/4" FPT
SS AA143ALGH6	22" Aluminum Spray Gun..... 3/4" GHT
SS AA2AAL	15" Aluminum Spray Gun..... 3/4" GHT

Trigger Hand Operated Spray Guns

Made of molded polypropylene with a polyester extension. Designed for ease and comfort in operation. Trigger lock permits locking of valve in open position for continuous flow of liquid. Maximum pressure is 150 PSI. Viton® diaphragm. 1/4" FPT or 3/8" HB inlet connection. Extensions included on 15" & 24" units.



Part No.	Description
SS 22650-1/4PP	Spray Gun Only, 1/4" FPT
SS 22650PP	Spray Gun Only, 3/8" HB
SS 22670PP1/4-15	15" Spray Gun, 1/4" FPT & #8 Nozzle †
SS 22670PP	15" Spray Gun, 3/8" HB & #8 Nozzle †
SS 22670PP-24406	24" Spray Gun, 3/8" HB & #8 Nozzle †
SS PKAB22670PP	Repair Kit for Spray Gun
SS 22665-15PP	Extension less Nozzle & Adapter
SS 22665-24PP	Extension less Nozzle & Adapter
SS CP22664PP	Straight Adapter, 11/16" Male x Male
SS CP22673PP	45° Adapter
SS 38720-PPBX8	* 45° Adjustable ConeJet Assembly

* Also available in X12 & X18. † Extensions included on these models

Lightweight Spray Guns



Lightweight Polypropylene Gun for use with back pack and other low pressure sprayers. Available with a 15" polypropylene or 21" aluminum extension. 1/4" or 3/8" Hose barb inlet connection. Trigger lock and internal strainer. 100 psi maximum pressure. Threaded outlet for use with any standard TeeJet tip but comes standard with a adjustable conejet tip as noted.

Part No.	Description
SS 50800-PP-1/4	Trigger Gun, No Extension, 1/4" FPT
SS 50800-14PPX8	Spray Gun, 1/4" HB with 15" Polypropylene Extension & #8 Nozzle
SS 50800-38ALX12	Spray Gun, 3/8" HB with 21" Aluminum Extension & #12 Nozzle
SS 50800-38PPX12	Spray Gun, 3/8" HB with 15" Polypropylene Extension & #12 Nozzle
SS 38720-PPBX8	* Adjustable ConeJet Nozzle

* X8, X12, X18 & X26 As Replacements.

Telescoping Spot Spray Wand

Telescoping Spot Spray Wand for a variety of applications. Plastic body and adjustable pattern spray nozzle with chromed aluminum lance extension. 3/8" Hose barb inlet fitting. Adjustable from 33" to 47". Comes with #18 spray tip.



Part No.	Length
MV SG500T	33" - 47"

Viton® is a registered trademark of DuPont Performance Elastomers