




Cone Bottom 304 Stainless Tanks

All seams double welded (*inside & outside*). 5° Roof and 10° cone slope. Tanks include (2) 2" FPT top fittings, 2" elbow bottom fitting, (2) 2" FPT side recirculation fittings, two lift hooks, 16" hinged roof manway. Tanks have 10" bottom clearance.

316SS Tanks also available in #2B finish (non-polished) or #4 finish (polished sides and top).

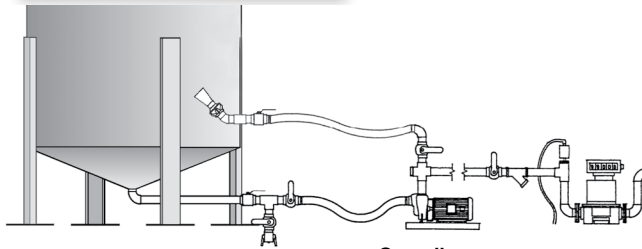

Part No.	Gallons	Diameter	Overall Height
FI 608SS	1729	6'	9' 9"
FI 610SS	2152	6'	11' 9"
FI 612SS	2575	6'	13' 9"
FI 614SS	2998	6'	15' 9"
FI 808SS	3096	8'	10' 1"
FI 810SS	3848	8'	12' 1"
FI 812SS	4600	8'	14' 1"
FI 814SS	5350	8'	16' 1"
FI 816SS	6100	8'	18' 1"

Call For Delivered Price

The packages listed below contain all necessary materials to complete assembly between tank & pump. Tank valves are full flow stainless, other valves are polypropylene. Standard hose is wire-reinforced EPDM. 2" Pressure/Vacuum vent included. Fittings are black malleable and XH Schedule 80 nipples. Pump & motor unit not included: see separate pages for pumps. **Pump/Meter Units available - Please Call.**

Part No.	Description
DU 1C018	Single Eductor Recirculation Set.....
DU 1C015	Fitting Package - Tank to Pump. 6' Tanks.....
DU 1C017	Fitting Package - Tank to Pump. 8' Tanks.....

www.
dultmeier.com

We now have our Catalogs as well as Parts Schematics online!



Steel Storage Tanks Flat Bottom

FEATURES: 1/4" bottom, 3/16" shell & top • (3) 4" FNPT threaded nozzles (*add for flanged outlets*) • 4" PVC Vent • 4" Siphon Tube, designed for fill and outload • 24" Bolted Manway • (4) Lift Eyes and Anchor Lugs • Acrylic Enamel.

Gallons	Diameter	Height
10,000	12'	10'
12,600	12'	15'
16,800	12'	20'
17,000	11'	24'
21,000	12'	25'
25,000	12'	30'
* 29,600	12'	35'

* With 1st Lower Band of 1/4"

Call for Delivered Price

Part No.	Description
PM 338817	24" Manway Gasket, 20 Bolt for Palmer Steel Tank

Fiberglass Storage Tanks

FEATURES: (2) 3" FPT Couplings (*One Siphon*) may be threaded or flanged • 24" Bolted Manway • (4) Carbon Steel Combination Lift Eyes/Anchor Lugs • 3/4" Sight Tube, Stainless Fittings, Stainless "Deadman" Valve, S.S. Wind Guards • Exterior Pigmented (*Colored*) Tan or White.

Gallons	Diameter	Height
8,400	12'	10'
10,150	12'	12'
12,600	12'	15'
16,800	12'	20'
21,000	12'	25'
25,350	12'	30'
29,600	12'	35'

Call for Delivered Price




Other Sizes Available on Request.

Part No.	Description
PM 338762	24" Manway Neoprene Gasket, 20 Bolt for Palmer Fiberglass Tank.....

Open Top Storage Tanks

Rectangular, Polyethylene Tanks for chemical storage. One-piece, molded construction means no seams to leak. Excellent chemical resistance. Translucent for visible contents level. Tanks come with lids. Rated to 140° F.

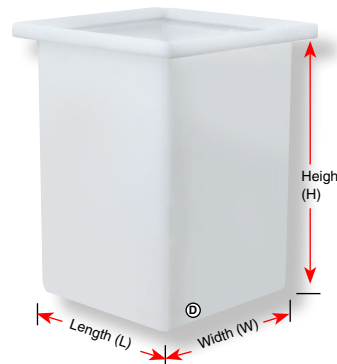

Part No.	Size	Capacity
CU R6X1212A	6"W x 12"L x 12"H	3 Gallon
CU R1212	12"W x 12"L x 18"H	11 Gallon
CU R1224	12"W x 24"L x 18"H	22 Gallon
CU R1824	18"W x 24"L x 18"H	37 Gallon

Call Free For Prices

Fuel Tanks Also Available

**Single & Double Wall Tanks
Vents, Valves, Tank Pumps & More!**



See Our Petroleum Equipment Section