

## Right Angle Swivels

Designed to swivel at 1500 PSI. No ball bearings to gall or rust. All Brass Body with Stainless Steel stem. Bronze thrust bearing for longer life. EPDM seals are standard. Swivels are repairable. Available threaded 3/8" MPT x 3/8" FPT or 3/8" FPT x 3/8" FPT.



Part No.	Pipe Thread Ports	Max. Pressure
SM 990-3/8	3/8" FPT X 3/8" MPT	1500 PSI
SM 990-3/8F	3/8" FPT x 3/8" FPT	1500 PSI
SM 990RK	Repair Kit	.....




## 90 Degree Swivels

Solid brass body with precision stainless steel thrust bearings to swivel effortlessly at full rated pressure. Internally lubricated o-rings and polished 303 stainless steel spool piece assures long, trouble-free operation. An excellent replacement swivel for hose reels and overhead booms.

Part No.	Ports	Max. PSI
FL SW504-L	1/4" M x 1/4" F	3500
FL SW504A-L	3/8" M x 3/8" F	3500
FL SW504A-LFF	3/8" F x 3/8" F	3500

## dultmeier.com

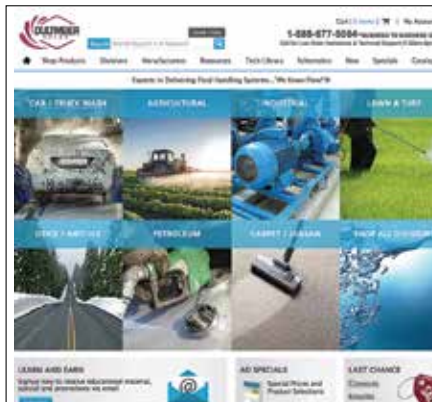

- Shop and Order On-Line 24 Hours a Day, 7 Days a Week!
- Large Inventories of Over 2.2 Million Total Items!
- View Current Pricing!
- Web Specials and Bargain Corner!
- Know Your Part Numbers? Use the Web Quick Order Page!
- Hundreds of Parts List Schematics (and more to come!)
- Technical Library packed with information!
- See New Items not Shown in Our Printed Catalogs!
- Track Your Order Status and History!
- Secure Site for Safe On-Line Ordering.



Viton® is a registered trademark of DuPont Performance Elastomers

## 90° Boom Swivels



90° Boom Swivels for ceiling or wall booms as well as hose reels. These swivels have a multiple seal system to prevent leakage under both low and high pressure. Constructed of a nickel-plated brass body with stainless steel internals. NBR o-rings and teflon support rings. Rated to 2200 or 4000 PSI and 250° F. \* Available in either short or long stem design for ease in plumbing.

Part No.	Inlet	Outlet	PSI	Stem	RPM
MM 40021	1/4" M	1/4" F	2200	Short	30
MM 40022	3/8" M	1/4" F	2200	Short	30
MM 40032	3/8" M	3/8" F	2200	Short	30
MM 40028	1/4" M	1/4" F	2200	Long	30
MM 40029	3/8" M	1/4" F	2200	Long	30
MM 40039	3/8" M	3/8" F	2200	Long	30
MM 43262	* 3/8" M	3/8" F	4000	Short	500
MM 43363	* 1/2" M	1/2" F	4000	Short	300
MM 40502	Seal Kit.....				

\* 43 Series are rated to 300° F. & 5000 PSI.

Call for Pricing

## Hose Reel Swivels



Hose Reel Swivels from Mosmatic. Common replacement swivel for many of the major reel manufacturers. All stainless construction, rebuildable design. Swivels under pressure. Rated to 5,000 PSI, 250° F. Maximum of 30 RPM. Available in 1/2" F x F or F x M FPT inlet and outlet.

Part No.	Ports	Max. PSI	Max. RPM
MM 43463B	1/2" F x M	5,000	30
MM 43473B	1/2" F x F	5,000	30
MM 43922	Repair Kit	.....	.....

Call for Pricing

## J.E. ADAMS Hose Reel Swivel

Right Angle Hose Reel Swivel. Heavy duty design. Ideal for use as a replacement swivel on a wide variety of hose reel applications. Brass construction. Easily rebuildable. Ports are 1/2" FPT x 1/2" FPT. Rated to 3000 PSI. Viton® O-rings and Teflon washer are standard. Maximum temperature is 300° F.



Part No.	Max. Pressure	Max. Flow
AA 7475	3000 PSI	10 GPM
AA 7475K	Repair Kit	.....



## Hose Reel Swivels



Hose Reel Swivels from Super Swivels. Common replacement swivels used by many of the major hose reel manufacturers. Ball bearing, 90 degree design. Nickel-Plated steel with Viton® seal. Rebuildable. Rated to 400° F. Pressure vary as shown. Ports are FPT x FPT.

Part No.	Size	Max. PSI
SE 5023	1/2" FPT	5000
SE 5033	3/4" FPT	4000
SE 5043	1" FPT	4000
SE 5053	1-1/4" FPT	4000
SE 5063	1-1/2" FPT	3000
SE SS8KIT	Repair Kit, 3/8" & 1/2" ....	.....
SE SS12KIT	Repair Kit, 3/4".....	.....
SE SS16KIT	Repair Kit, 1".....	.....