

Tire Pressure Gauge Accessories


A810 ACME Ball-Foot Air Chuck: 1/4" MPT.

A815 ACME Ball-Foot Air Chuck: 1/4" FPT.

A-824 ACME Dual-Foot Extension Chuck: Closed Check Chuck. For hard-to-get-at valves on tractor, dual-wheel truck and bus tires. 1/4" FPT inlet. Nickel-plated. For use on air hoses and air meters.

A1501-BL ACME Sight Glass Inflator Gauge: Makes tire inflation easy. The dual calibrated (*PSI and kPa*) internal pressure reading indicator makes this inflator simple to read. The gauge measures from 10 to 120 lbs. in 2 lb. increments allowing precise control over tire inflation. Dual Heavy-Duty Chuck.

A825 SCHRADER Valve stem 1/4" MPT.

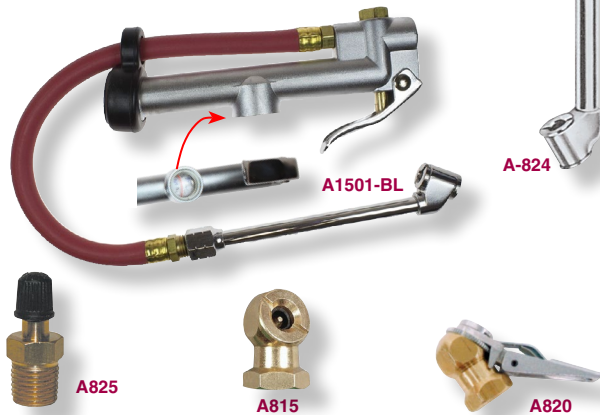

Part No.	Description
AM A810	Air Chuck, 1/4" MPT
AM A815	Air Chuck, 1/4" FPT.....
AM A820	Clip On Air Chuck with 1/4" FPT Inlet.....
AM A-824	Extension Air Chuck.....
AM A825	Schrader Valve x 1/4" MPT
AM A1501-BL	Sight Glass Style Inflator Gauge, Dual Chuck
AM A1600-PB	Sight Glass Style Inflator Gauge, Straight Chuck

Air Blow Guns

Heavy-Duty Blow Guns combine durability, performance and safety to meet your cleaning and drying needs. Available in top mount lever or button styles or plastic pistol style. Brass safety nozzles are rated to the pressures shown. Rubber nozzles are an ideal choice for protecting against scratches or damage to surfaces.

OSHA compliant depending on style of nozzle that is used. * (*Non-relieving, rubber nozzles are only OSHA compliant if inlet pressure is regulated to 30 PSI maximum*).

Lever Guns are chrome-plated brass construction rated to 150 PSI. Coated lever with 1/4" FPT inlet. Available with brass or *rubber nozzles.

Pistol Grip Guns feature a light-weight, nylon or metal body with brass valve mechanism. Rated to 125 PSI. Inlet is 1/4" FPT. Available with brass or *rubber nozzles.




Part No.	Style	Nozzle
ZS BG25	Lever	Brass
ZS BG27	Lever	* Rubber
ZS BG47	Pistol	* Rubber
ZS PG2T	Pistol	Brass



Quick-Connect Air Line Fittings

DANFOSS/HANSEN Quick-Connect Couplings provide the fastest, easiest, and most reliable means of joining air lines and tools. Automatic coupling, easy disconnect and positive air shut-off. Coupling bodies are brass, Plugs are plated steel. All fittings are of the popular "Industrial Interchange" design. Rated to 150 PSI.

Part No.	Description
EV DCB20	1/4" FPT Female Coupler
EV DCB26	3/8" FPT Female Coupler
EV DCB10	1/2" FPT Female Coupler
EV DCP20	1/4" FPT Female Plug.....
EV DCP26	3/8" FPT Female Plug
EV DCP18	1/2" FPT Female Plug.....
EV DCP21	1/4" MPT Male Plug
EV DCP25	3/8" MPT Male Plug
EV DCP17	1/2" MPT Male Plug.....

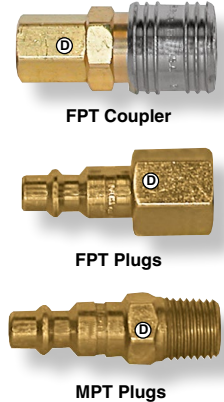

WindJet Air Nozzles

For Use With Compressed Air



WindJet Air Nozzles are designed to be used in air drying or air cleaning applications when used with compressed air. Helps reduce operating costs and noise, improve worker safety and provides more precise drying and blow-off. 25% to 35% less air used and noise reductions from 30% to 60% compared to open pipe. Used for industrial cleaning/drying as well as for car washes for drying door handles, window and door trim, mirrors and more. Rated to 90 PSI.

These nozzles convert a low pressure volume of air into a targeted high velocity air stream. Precision orifices ensure uniform distribution and spray pattern. Inlet port is 1/4" FPT. Height is 3-1/2". Width is 2". Construction is yellow ABS plastic.

Part No.	Inlet	Cfm @ 30 PSI
SS AA727F-11	1/4" FPT	8.9
SS AA727F-15	1/4" FPT	12.8
SS AA727F-23	1/4" FPT	18.4

Visit our office in Omaha, Nebraska



13808 Industrial Road • Omaha, NE 68137

1-800-228-9666 • 1-402-333-1444 • FAX: 1-402-333-5546

Visit our office in Davenport, Iowa



601 West 76th St. • Davenport, IA 52806

1-800-553-6975 • 1-563-386-0930 • FAX: 1-563-386-5448

email: dultmeier@dultmeier.com • website: dultmeier.com