


Drop Forged Turnbuckles Hot Dip Galvanized

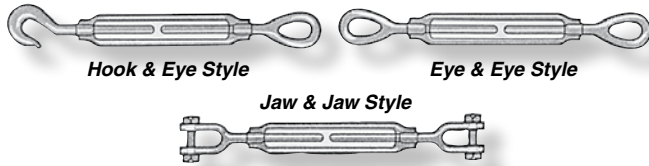

Hook & Eye Style

Part No.	Size	Take UP	Closed Length	Capacity
KL 386HE	3/8"	6"	12"	1000 lbs.
KL 126HE	1/2"	6"	13"	1500 lbs.
KL 586HE	5/8"	6"	15-1/2"	2250 lbs.
KL 3412HE	3/4"	12'	23"	3000 lbs.

Eye & Eye Style

Part No.	Size	Take UP	Closed Length	Capacity
KL 386EE	3/8"	6"	12"	1200 lbs.
KL 126EE	1/2"	6"	13"	2200 lbs.
KL 586EE	5/8"	6"	15-1/2"	3500 lbs.
KL 3412EE	3/4"	12"	23"	5200 lbs.

Jaw & Jaw Style

Part No.	Size	Take UP	Closed Length	Capacity
KL 349JJ	3/4"	9"	20"	5200 lbs.
KL 3412JJ	3/4"	12"	23"	5200 lbs.

NOTE: Any combination of jaws, hooks & eyes are available in Sizes 1/4"x4" through 2"x24". For Pad Eyes Order the threaded eye end only.

SCC QuikBinder™ Plus

Designed for Use with Either Grade 70 (S-7) Transport or Grade 80 (T-8) Alloy Tie-Down Chains



SCC's QuikBinder™ Plus is easier to install than standard ratchet load binders. The 3-position pawl offers the user a choice of ratchet extension, ratchet take-up or a "free spin" setting for fast adjustment in either direction.

Can be locked to the tie-down chain with a long shank padlock, making it more difficult to tamper with the binder. SCC load binders meet all DOT/CVSA/CCMTA requirements. These load binders are heat treated and proof tested.

Part No.	Chain Size	Takeup	Handle Length Folded	Handle Length Straight	Working Load Limit LBS	Wt. Lbs.
MI H5125-0658	5/16" or 3/8"	6.00"	9.50"	13.9"	7,100	11.40
MI H5125-0858	3/8" or 1/2"	6.00"	9.50"	13.9"	12,000	13.90

Aircraft Cable Galvanized (Stainless Also Available)



EXTRA FLEXIBLE CABLE: Construction is (7) STRANDS of (19) WIRES EACH. Use where high strength & flexibility is required.

KL-NO.	Cable Size	Breaking Strength Pounds	Work Load Pounds	Weight (Reel)	* Feet Per Full Reel
7X19-1/8	1/8"	2000	300	7	250
7X19-3/16	3/16"	4200	600	16	250
7X19-1/4	1/4"	7000	1000	27	250
7X19-5/16	5/16"	9800	1400	43	250
7X19-3/8	3/8"	14400	2000	61	250

Part No.	Full Reel Size
KL 7X19-1/8	250'
KL 7X19-3/16	250'
KL 7X19-1/4	250'
KL 7X19-5/16	250'
KL 7X19-3/8	250'
KL 7X19-3/8-1000	1,000'

* Sold In Full Reels Only.

Galvanized Wire Rope 6 x 19 Wire Core (Stainless Also Available)

KL-NO.	Cable Size	Breaking Strength Pounds	Work Load	Weight Per Reel	Feet Per Full Reel
6X19-1/2	1/2"	26,600	3800	115	250
6X19-5/8	5/8"	41,200	5900	180	250
6X19-3/4	3/4"	58,800	8400	260	250



Part No.	Full Reel Size
KL 6X19-1/2	250'
KL 6X19-5/8	250'
KL 6X19-3/4	250'

* Sold In Full Reels Only.

Galvanized Malleable Cable Clamps (Stainless Also Available)



For Aircraft Cable or Wire Rope

Part No.	Size	Std. Pkg.	Box/50 DISCOUNT
MI D86090	1/8"	50	20%
MI D86190	3/16"	50	20%
MI D86290	1/4"	50	20%
MI D86390	5/16"	50	20%
MI D86490	3/8"	50	20%
MI D86690	1/2"	50	20%
MI D86890	5/8"	25	20%
MI D86900	3/4"	25	20%



Galvanized Thimbles (Stainless Also Available)



Part No.	Size *	Part No.	Size *
MI D86095	1/8"	MI D86495	3/8"
MI D86195	3/16"	MI D86695	1/2"
MI D86295	1/4"	MI D86895	5/8"
MI D86395	5/16"	MI D86905	3/4"

* LESS 20% ON BOXES OF 50

