


TeeJet CLEANING NOZZLES

300 to 4000 PSI

High Quality, High Impact Spray Nozzles for wands, arches, conveyor systems and anywhere high pressure washing or rinsing is needed. Available from 0 degree solid stream to 110 degree flat fan patterns. Stainless steel construction rated between 300 and 4000 PSI. Internal guide vane is available on some nozzle types to provide maximum spray integrity. Available in 1/8" male, 1/4" male, 1/4" female and 1/4" quick coupler styles as noted below. (See Nozzle Charts in back of this catalog for flow PSI) **NOTE: Available in NPT Thread Only - NO BSP Thread available from Dultmeier Sales**

Nozzle Types

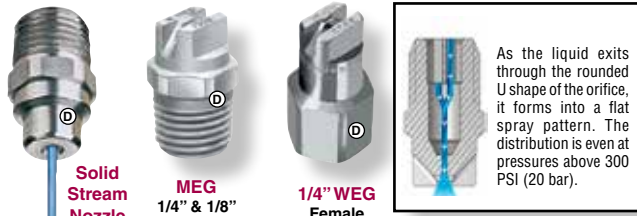

As the liquid exits through the rounded U shape of the orifice, it forms into a flat spray pattern. The distribution is even at pressures above 300 PSI (20 bar).

WashJet MEG Series 400 hardened stainless steel nozzles are rated to 3000 PSI. Available with or without stabilizer vanes. Solid stream to 65 degree wide patterns are available.


1/8" MEG (Male) Nozzles are available for #1 through #20 orifices. Male threads only. **Example: 1/8MEG0002 is 1/8" MPT (male) thread, zero stream, #2 orifice.** (ADD VA at end of number if internal vane is required).

1/4" MEG (Male) or **1/4" WEG (Female)** nozzles are available from #2 through #80 orifices. **Example: 1/4WEG4004 is 1/4" female thread, 40 degree pattern, #4 orifice.** (ADD VA at end of number if internal vane is required).

Part No.	Nozzle Type	Max. PSI
SS 1/8MEGxxxx	1/8" Male, No Vane	3000
SS 1/8MEGxxxxVA	1/8" Male, With Vane	3000
SS 1/4MEGxxxx	1/4" Male, No Vane	3000
SS 1/4MEGxxxxVA	1/4" Male, With Vane	3000
SS 1/4WEGxxxx	1/4" Female, No Vane	3000
SS 1/4WEGxxxxVA	1/4" Female, With Vane	3000



5% Discount on 20 Nozzles of One Size
10% Discount on 100 Assorted Nozzles

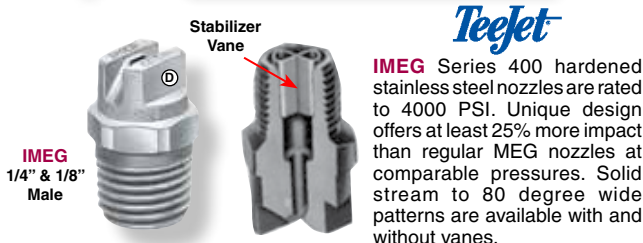

IMEG Series 400 hardened stainless steel nozzles are rated to 4000 PSI. Unique design offers at least 25% more impact than regular MEG nozzles at comparable pressures. Solid stream to 80 degree wide patterns are available with and without vanes.

1/8" IMEG (Male) Nozzles are available from #2 through #8 orifices.

1/4" IMEG (Male) Nozzles are available from #2 through #8 orifices.

Part No.	Nozzle Type	Max. PSI
SS 18IMEGxxxx	1/8" IMEG, No Vane	4000
SS 18IMEGxxxxVA	1/8" IMEG, With Vane	4000
SS 14IMEGxxxx	1/4" IMEG, No Vane	4000
SS 14IMEGxxxxVA	1/4" IMEG, With Vane	4000

5% Discount on 20 Nozzles of One Size
10% Discount on 100 Assorted Nozzles

QCMEG Series 400 hardened stainless steel nozzles are rated to 4000 PSI. This series features 1/4" male quick coupler inlet and color coded caps. All QCMEG nozzles also come with internal stabilizer vanes. Solid stream to 40 degree wide patterns are available.



5% Discount on 20 Nozzles of One Size and
10% Discount on 100 Assorted Nozzles

Part No.	Nozzle Type	Max. PSI
SS QCMEGxxxx	1/4" Quick Coupler	4000
SS QCME2540	1/4" Brass Soap Nozzle	300

Note: Nozzle colors are based on pattern and not orifice numbers.
Spray Angles: 0° = Red 15° = Yellow 25° = Green 40° = White

Spraying Systems VeeJet HVVSS and HUSS Series 303 stainless steel nozzles create a very precise pattern from 300 to 1000 PSI. Solid stream to 110 degree wide patterns are available in a larger number of orifice sizes and flow rates.

HVVSS Series are available from #1 through #9 orifices in 1/8" MPT or 1/4" MPT.

HUSS Series are available from #10 through #50 orifices in 1/8" MPT (not all patterns) and #10 through #80 in 1/4" MPT.

(Sizing Example: H1/4VSS2506 is 1/4" MPT, 25 degree pattern, #6 orifice).



HVVSS & HUSS VeeJet

Part No.	Nozzle Type	Max. PSI
SS H1/8VSSxxxx	1/8" Male	1000
SS H1/4VSSxxxx	1/4" Male	1000
SS H1/4USSxxxx	1/4" Male	1000

5% Discount on 20 Nozzles of One Size or
10% Discount on 100 Assorted Nozzles

Nozzle Patterns & Sizes

0 Degree, Solid Stream nozzles are available from #2 through #20 orifices in 1/8" MPT male and #2 through #80 orifices in 1/4" MPT (male) or 1/4" FPT (female) styles. **Good choice for aggressive pressure washer and industrial cleaning.**

5 Degree nozzles are available from #2 through #9 orifices in 1/8" MPT male and #2 through #30 orifices in 1/4" MPT (male) or 1/4" FPT (female) styles. **Good choice for aggressive pressure washer and industrial cleaning.**

15 Degree nozzles are available from #1 through #15 orifices in 1/8" MPT (male) and #1 through #60 orifices in 1/4" MPT (male) or 1/4" FPT (female) styles. **Good choice for pressure washer, industrial cleaning, self serve, automatic and conveyor car washes.**

25 Degree nozzles are available from #2 through #15 orifices in 1/8" MPT (male) and #2 through #60 in 1/4" MPT (male) or 1/4" FPT (female) styles. **Good choice for pressure washer, self-serve, automatic and conveyor wash and industrial cleaning applications. Most popular self-serve wash pattern.**

40 Degree nozzles are available from #2 through #12 orifices in 1/8" MPT (male) and #1 through #60 in 1/4" MPT (male) or 1/4" FPT (female) styles. **Good choice for arches, high pressure automatics, conveyor wash and industrial cleaning applications.**

50, 65 and 80 Degree nozzles are available in limited sizes, call for details. **Good choice for conveyor wash and industrial cleaning applications.**

Adjustable Pattern Spray Nozzles

Adjustable Pattern Spray Nozzles from *Spraying Systems*. These nozzles will produce a high impact spray pattern for washing and rinsing. Simply rotate the cap to easily change from solid stream to 80° pattern.

Brass bodies with nylon caps. Hardened stainless orifice, stainless steel guide vane and stainless deflector blade. Rated 300 to 3,000 PSI. Temperatures to 300° F. 1/4" FPT inlet.

Part No.	Orifice	Cap	Flow @ 3000 PSI
SS 23990-1/4-03	03	Nylon	2.6 GPM
SS 23990-1/4-04	04	Nylon	3.5 GPM
SS 23990-1/4-05	05	Nylon	4.3 GPM
SS 23990-1/4-06	06	Nylon	5.2 GPM
SS 23990-1/4-07	07	Nylon	6.0 GPM
SS 23990-1/4-08	08	Nylon	6.9 GPM
SS 23990-1/4-10	10	Nylon	8.6 GPM
SS 23990-1/4-12	12	Nylon	10.4 GPM