




Spring Rewind Reel & Hose Units

Hannay Spring Rewind Hose Reels feature narrow frame and compact mounting base. Heavy-duty spring provides self-contained rewind power. Ideal for air and water, lubrication, maintenance operations, service stations and many other industrial uses. 10 Gauge and 14 gauge steel construction with enamel finish. All reels come with hose type and length shown along with hose stop and hose roller assembly. Model SR roller position is standard but other positions are available.



N47-25

Shown with
Optional TR
Position



AIR & WATER REELS - LOW PRESSURE

Part No.	Description	Hose			
		Size	Length	PSI	Wt.
HN 47-24	N716-19-20J Series Spring Rewind with single textile braid reinforced synthetic rubber hose, and HS-3 hose stop installed.....	1/2"	50'	300	100 lbs.

AIR, WATER & LUBE OIL REELS - MEDIUM PRESSURE

Part No.	Description	Hose			
		Size	Length	PSI	Wt.
HN 47-25	N716-19-20J Series Spring Rewind with SAE 100 R1 Type AT hose, and HS-3 hose stop installed.....	3/8"	50'	2250	99 lbs.
HN 47-26	N716-19-20J Series Spring Rewind with SAE 100 R1 Type AT hose, and HS-3 hose stop installed.....	1/2"	50'	2000	102 lbs.
HN 47-45	* N716-25-26B Series Spring Rewind with SAE 100 R1 Type AT hose, and HS-3 hose stop installed	3/8"	75'	2250	145 lbs.
HN 47-46	* N716-25-26B Series Spring Rewind with SAE 100 R1 Type AT hose, and HS-3 hose stop installed	1/2"	75'	2000	150 lbs.

AIR, WATER & LUBE OIL REELS - HIGH PRESSURE

Part No.	Description	Hose			
		Size	Length	PSI	Wt.
HN 47-27	N716-19-20J H5M Series Spring Rewind with SAE 100 R16 Type AT hose, and HS-3 hose stop installed	3/8"	50'	4000	102 lbs.
HN 47-28	N716-19-20J H5M Series Spring Rewind with SAE 100 R16 Type AT hose, and HS-3 hose stop installed	1/2"	50'	3500	105 lbs.

GREASE REELS

Part No.	Description	Hose			
		Size	Length	PSI	Wt.
HN 45-11	N515-19-20J H10M Series Spring Rewind with SAE 100 R2 Type AT hose, and HS-3 hose stop installed	1/4"	50'	5000	98 lbs.
HN 45-13	N515-19-20J H8M Series Spring Rewind with SAE 100 R16 Type AT hose, and HS-3 hose stop installed	3/8"	50'	4000	99 lbs.

* Cannot Ship UPS




Controlled Return Hose Reel

ReelSafe Spring Rewind Hose Reels from **Reelcraft** feature a unique system that pays out hose like a traditional reel, but retracts back into the reel at average walking speed. Safely protects personnel and equipment. Decelerates hose retraction up to 83% vs standard reels. Low pressure models are ideal for air or water applications. Medium pressure reels can be used for oil transfer. High pressure reels can be used for grease applications.

Standard Features:

- Retracts Hose at 2 Miles Per Hour, Matches Average Walking Speed
- Constant Retraction Regardless of Fluid or Environmental Temperatures
- No Field Adjustment Required
- 7 Position Hose Arm Guide Allows for Multiple Mounting Options
- All Models Include Hose As Noted
- All Models Have 1/2" FPT Inlet
- Made in the USA
- All Reels Can Be Ordered "Without" Hose If Needed

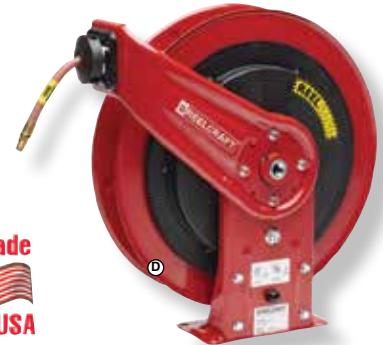

Part No.	Hose & End Fitting		Pressure	Wt.
	Size	Fitting		
RF RS7650OLP	3/8" x 50'	1/4" MPT	300 PSI	46 lbs.
RF RS7850OLP	1/2" x 50'	3/8" MPT	300 PSI	50 lbs.
RF RS7650OMP	3/8" x 50'	3/8" MPT	2600 PSI	58 lbs.
RF RS7850OMP	1/2" x 50'	1/2" MPT	3000 PSI	60 lbs.
RF RS7450OHP	1/4" x 50'	1/4" MPT	5000 PSI	58 lbs.
RF RS7650OHP	3/8" x 50'	1/4" MPT	4800 PSI	63 lbs.

Soft Wash Hose Reels

Aluminum/Stainless Reels with Hardcore Technology for Soft Wash applications. These reels feature High quality Aluminum construction with Stainless steel construction for long lasting strength and durability. Spring loaded locking pin prevents unspooling when not needed. Reels can be stacked if required with handy bolt-on stack kit. Hose guides are optional and available as shown.

A great choice for the rigors of Soft Wash, Pest Control, Agriculture, Carpet Cleaning and more. Compact sizes can handle 3/8", 1/2" or 5/8" hose. Stainless swivel with Viton seal is 1/2" Fpt. Rated to 725psi

Simple, bolt-on stacking unit option allows for multiple hose reel applications on professional units.



Optional stainless steel & aluminum hose guides mount easily to avoid pinching & kinking.

- HR12** reel with swivel and handle is 28" long x 16-1/2" wide x 17-3/4" High
- HR18** reel with swivel and handle is 34-1/2" long x 16-1/2" wide x 17-3/4" High

Part No.	Size	Capacity			Wt.
		3/8"	1/2"	5/8"	
MV HR12AFSW	12"	300'	200'	150'	25lbs.
MV HR18AFSW	18"	450'	325'	225'	29lbs.
MV HG12AL	Hose Guide for 12" Reel				5lbs.
MV HG18AL	Hose Guide for 18" Reel				5lbs.
MV HRSTKIT	Aluminum stacking kit for 12" or 18" reels....				6lbs.