


Direct Drive • Forged Brass Manifolds

Direct Drive Plunger Pumps from *General Pump*. High quality pumps with ceramic plungers and forged brass manifolds. Designed for electric motors or gas engines as noted. Rated to 165° F. Some models can be ordered for higher temperatures if required.



5/8" Shaft

**Direct
Drive**

Pumps with Flange Plates for 5/8" Shaft, 56C Electric Motors

Part No.	GPM	PSI	RPM	Shaft	Required Motor	Wt./Lbs.
IP T9051EBF	2.1	1500	1750	5/8" Hollow	2 HP, 56C	12
IP TT9061EBF	2.1	1500	3400	5/8" Hollow	2 HP, 56C	12
IP ETB1509E175	2.1	2600	1750	5/8" Hollow	3-4 HP, 56C	11
IP ETB1505E345	2.1	2600	3400	5/8" Hollow	3-4 HP, 56C	11
IP TT9071EBF	2.8	2000	3400	5/8" Hollow	3-4 HP, 56C	12
IP TT2028EBF	2.8	2000	3400	5/8" Hollow	3-4 HP, 56C	12
IP TT9111EBF	3.0	1500	1750	5/8" Hollow	3 HP, 56C	12
IP EWM3015C	* 3.0	1500	1750	5/8" Hollow	3 HP, 56C	11
IP EWM3715C	* 3.7	1500	1750	5/8" Hollow	4 HP, 56C	11

* Stainless Manifold, Rated to 185° F.



5/8" Shaft

Ready Made Pump units for 5/8" shaft, 56C Electric Motors

(Includes Pump, Unloader, Pop-off valve, Garden Hose Inlet, Thermal valve, Bypass hose.)

Part No.	Max GPM	Max PSI	Max RPM	Shaft	Required * Motor	Wt./Lbs.
IP PMRET1509E17	2.1	2600	1750	5/8	1-1/2 to 4hp	14
IP PMRET1809E17	3.2	2300	1750	5/8	2-5hp	14
IP PMRET1505E34	2.1	2600	3400	5/8	1-1/2 to 4hp	14
IP PMRET1507E34	3.2	2600	3400	5/8	2-5hp	14

* Horsepower is dependent on flow and pressure required



1-1/8" Shaft

**Direct
Drive**

Pumps with Flange Plates for 1-1/8" Shaft, 184TC Electric Motors

Part No.	GPM	PSI	RPM	Shaft	Required Motor	Wt./Lbs.
IP EZ2536E	3.6	2500	1750	1-1/8" Hollow	5-7 HP, 184TC	18
IP EZ2542E	4.2	2500	1750	1-1/8" Hollow	7 HP, 184TC	18
IP EZ2545E	4.6	2500	3400	1-1/8" Hollow	8 HP, 184TC	18
IP EZ2555E	5.5	2500	3400	1-1/8" Hollow	9 HP, 184TC	18




3/4" Shaft

**Direct
Drive**

Pumps with Flange Plates for Gas Engines with 3/4" Shafts

Part No.	GPM	PSI	RPM	Shaft	Required Motor	Wt./Lbs.
IP TT9061GBF	2.1	1500	3400	3/4" Hollow	3 HP, 3/4"	11
IP EP1505G6	2.1	3000	3400	3/4" Hollow	6-7 HP, 3/4"	16
IP TT2028GBF	2.8	2000	3400	3/4" Hollow	5 HP, 3/4"	11
IP TT9071GBF	2.8	2000	3400	3/4" Hollow	5 HP, 3/4"	11
IP EP1506G6	2.9	3000	3400	3/4" Hollow	9 HP, 3/4"	16
IP ETB1507G	3.2	2600	3400	3/4" Hollow	5-6 HP, 3/4"	11
IP EP1508G6	3.4	3000	3400	3/4" Hollow	10 HP, 3/4"	16
IP TT2035GBF	3.5	2000	3400	3/4" Hollow	7 HP, 3/4"	11
IP TT1540GBF	4.0	1500	3400	3/4" Hollow	6 HP, 3/4"	11
IP ETB1509G	4.0	2600	3400	3/4" Hollow	7 HP, 3/4"	11

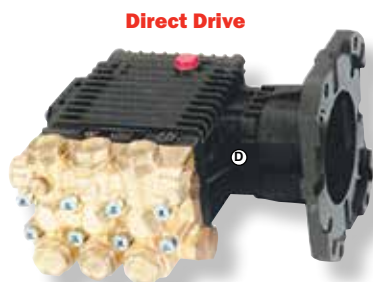

1" Shaft

Direct Drive

Pumps with Flange Plates for Gas Engines with 1" Shafts

Part No.	GPM	PSI	RPM	Shaft	Required Motor	Wt./Lbs.
IP EP1506G8	2.9	3000	3400	1" Hollow	9 HP, 1"	17
IP EP1310G8	3.2	4000	3400	1" Hollow	13 HP, 1"	17
IP EP1508G8	3.4	3000	3400	1" Hollow	10 HP, 1"	17
IP EP1509G8	3.7	3000	3400	1" Hollow	11 HP, 1"	17
IP EZ3040G	4.0	3000	3400	1" Hollow	12 HP, 1"	19
IP EP1313G8	4.0	4000	3400	1" Hollow	16 HP, 1"	17
IP EP1510G8	4.2	3000	3400	1" Hollow	13 HP, 1"	17
IP EZ4040G34	4.2	4000	3400	1" Hollow	16 HP, 1"	19