



Spraying Systems Wash Down Spray Guns

These popular wash down guns are used in a variety of industries for clean up and disinfecting. Variable spray from solid stream to 50 degree pattern is controlled at the trigger. **Rated to temperatures up to 200° F.** and pressures to 150 PSI. Body is aluminum and is covered by a replaceable **white**, Nitrile rubber grip. Trigger is stainless steel. Available in 10, 16 or 22 GPM units. Inlet port is 1/2" female pipe thread.



TeeJet

Rated to Temperatures up to 200° F.

Part No.	Rating
SS CU1501	10 GPM
SS CU1502	16 GPM
SS CU1503	22 GPM



Best Seller

Maximum Temperatures to 190° F.



Wash Down Spray Gun

Suttner Industrial Spray Guns are an ideal choice for plant or bay washdown. Spray pattern is adjustable. Thick, rubber sheathing protects against heat, cold and impact. Rated to 350 psi and flows to 27 gpm. **Maximum temperatures to 190° F.** Inlet port is 1/2" FPT. Weight is 28 oz.

Part No.		Rating
NP ST1200	Wash Down Gun, Brass	27 GPM
NP ST1200SS	Wash Down Gun, Stainless *	27 GPM

* Food Grade.

Adjustable Pattern Spray Wands

These unique spray wands are ideal for soft wash applications, Plant washdown, food processing, general rinsing and more. Variable pattern, (zero to 60 degree) is controlled by the trigger pull. Rated to either 16 or 25 GPM and 350 PSI. Impact resistant covers and bumpers to protect from damage. Inlet ports are 1/2". Repair kits are available.

- YG1317S** has **Blue** cover and trigger. All brass construction. Rated to 13 GPM.
- YG1635N** has **Blue** cover and trigger. All brass construction. Rated to 16 GPM.
- YG2635AS** has **Blue** cover, **Red** trigger. All brass construction. Rated to 25 GPM.
- YG1635SR** has **Red** cover and trigger, All brass construction with SS piston, 16 GPM.
- YG1635SS** has **Blue** cover, **Gray** trigger. All stainless construction. Viton® O-Rings. Rated to 16 GPM.




Part No.	Cover	Flow	Internals	Temp.
IP YG1317S*	Blue	13.2 GPM	All Brass	120° F.
IP YG1635N	Blue	16 GPM	All Brass	140° F.
IP YG2635AS	Blue	25 GPM	All Brass	195° F.
IP YG1635SR	Red	16 GPM	Brass w/SS Piston	195° F.
IP YG1635SS*	Blue	16 GPM	All Stainless	140° F.

* Viton® O-Rings.

Trigger Wand & Hose Assemblies

Complete Trigger Wand Hose Assemblies are ready-to-use with your pressure washers or high pressure pump.

Assemblies Include: Easy pull trigger handle • 36" Extension with insulated grip and quick coupler for nozzles (**Note: Nozzles not included, must be matched to your pump**) • Abrasion-resistant hose in 25' or 50' lengths with stainless MPT ends and brass quick coupler • Rated to 8 GPM, 3000 PSI, 220° F. (Higher pressure options available).

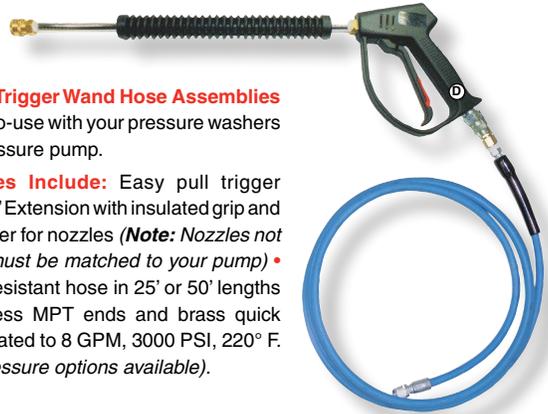

Part No.	
DU TR25WH	Trigger Wand Package with 25' Hose, 3,000 PSI, Weight is 7 lbs.
DU TR50WH	Trigger Wand Package with 50' Hose, 3,000 PSI, Weight is 11 lbs.
SS QCMEGxxx	Quick Connect Nozzle Matched To Your Pump

Trigger Wand Assembly




Complete Trigger Wand Assemblies. Ready to hook up to your pressure washer. Assemblies include: Trigger gun, 36" extension with molded grip, 3/8" inlet quick nipple, 1/4" quick coupler outlet. Rated to 8 GPM, 4000 PSI and 220° F. **Nozzles are not included.**

Part No.	
MV 430029	Complete Trigger Wand Assembly
SS QCMEGxxx	Nozzles

SUTTNER Trigger Wand Assemblies

Complete Trigger Wand Assembly. All components needed to attach to your pressure washer hose. Includes trigger gun, 36" wand extension, slide grip handle, nozzle holder, nozzle quick coupler, (4) high pressure nozzles from zero to 40 degree, and (1) low pressure soap nozzle. Assembled and ready-to-use. Wands and lances rated to 5,000 PSI and 300° F. Rubber nozzle holder rated to 140° F. and can be removed for hot water applications.

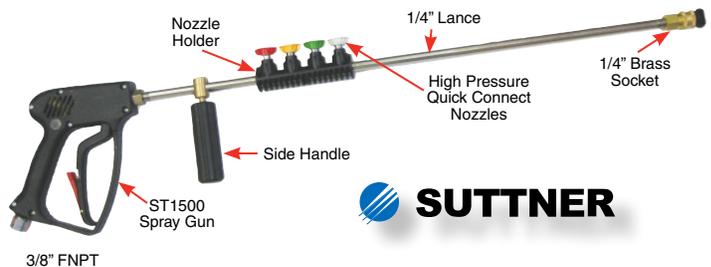

Part No.	Nozzle Size	Length
NP ST1500AY4	4.0	40"
NP ST1500AY5	5.0	40"
NP ST1500AY6	6.0	40"

Viton® is a registered trademark of DuPont Performance Elastomers