

Teflon Tape

155X Teflon Thread Tape is a heavy-duty industrial grade, extra-dense tape which is ideal for sealing all types of threaded connections even under the most difficult service conditions. Temperature range is -400 to +500 degrees F. (1/2" & 1" X 520" Rolls).

SA26 Nickel-Coated Teflon Tape is designed specifically for difficult stainless steel and aluminum thread sealing applications. Pure nickel base helps prevent galling and seizing. Resists high temperatures and corrosion. Temperature Range: -450° F to 550° F. Spec.



Part No.	
CR 155X	Teflon Tape - 1/2" x 520" Roll
CR TTH1520	Teflon Tape - 1" x 520" Roll
CR SA26	Nickel-Coated Teflon Tape - 1/2"x260" Roll.....

Anti-Seize Compounds



These products provide protection against seizing, galling, rust and corrosion. Non-hardening, non-dripping. Speeds assembly and facilitates disassembly. Ideal for use on nuts, bolts, screws, bushings, shafts, sleeves, coupling, motors, pumps, etc. Up to 1800° F. All cans include brush applicators. **Rectorseal** and **Gasoila** brands as noted. Sold individually or discounted in standard packages.

Part No.		Container	* Std. Pkg.
RS 73431	Rectorseal Anti-Seize	1 Pint	12
CR CG04	Gasoila Anti-Seize	1/4 Pint	24

*** Standard Packages Qualify for 10% Discount**

Rapp-it Pipe Repair Kits NEW

Designed for on-site emergency pipe repairs, the **Rapp-It Pipe Repair Bandage** quickly contains leaking substances, keeping a workplace safe. Each repair kit includes a woven fiberglass bandage infused with water-activated resin and a 90mm stick of steel putty. For a wide array of industries and applications: mining, processing, oil and gas, petrochemical, marine and agriculture. Works on most types of pipe including steel, poly, PVC, fiberglass, & copper.



Features:

- Easy to apply – No mixing or measuring required
- Tenacious Bond: 5 to 10 min.; Functional Cure: approximately 30 minutes; Full Cure: 24 hours
- Suitable for use on acid lines, gas, most diluted chemicals, sea water, fuels, and oil
- Resistant to hydrocarbons, ketones, esters, alcohols, halocarbons, aqueous salt solutions, and dilute acids/bases
- Bonds to Wet or Dry Pipe – Apply under fresh and saltwater
- Pressure Rating: 360 PSI • Compressive Strength: 8,000 PSI
- Temperature Rating: -40° F. to 250° F. continuous / 300° F. intermittent
- NATO Certification: 4730-66-1257893

Part No.	
EV RAP122	Rapp-It Repair Kit, 2" x 12'.....
EV RAP123	Rapp-It Repair Kit, 3" x 12'.....
EV RAP124	Rapp-It Repair Kit, 4" x 12'.....
EV RAP164	Rapp-It Repair Kit, 4" x 16'.....
EV RAP304	Rapp-It Repair Kit, 4" x 30'.....

Free All Deep Penetrating Oil



Free All Spreads Into Rusted & Frozen Parts, Freeing Them Faster & Easier Than Any Other Penetrating Oil Around !

201W Free-All Oil penetrates rust, scale and corrosion to free parts quickly and easily. Loosens tar, lead, grease, carbon and graphite deposits. Rust eating formula is ideal for most any industrial application. Contains no silicones. Ideal for use on pipe connections, screws, bolts, nuts, clamps and locks. Sold in 6 oz. aerosol cans.

The Original **Rust Eater** 40 YEARS **Eats Rust. Splits Bolts.**

Part No.	Aerosol	* Std. Pkg.
CR 201W	FreeAll Penetrating Oil 6 oz. Can	12

*** Standard Packages Qualify for 10% Discount**

Thread Sealers for Stainless Steel



The best thread sealer for Stainless Steel fittings. **Loctite** will stop gas and fluid leaks on all metals: Stainless, forged, galvanized, iron, cast, copper and brass. Used for most liquid applications on industrial acids, solvents, chemicals, gases and steam. Resin is Methacrylate Ester.


Temperature range is -65° F. to 400° F. Rated to 1,000 PSI; however, laboratory tests on 1/2 NPT fittings have been leak-free to 10,000 PSI. Cure time above 60° F. is 4 hours on 1" fittings – longer on larger diameter fittings. To accelerate the cure time you must use **Loquick Primer N764** at low temperatures or larger diameters.

Note: Primer not recommended on Stainless.



Part No.	Tube Loctite Sealant
GD AD56747	50ML Tube - 1.69 oz.
GD AD56765	250ML Tube - 8.45 oz.

Visit Us On the Internet!

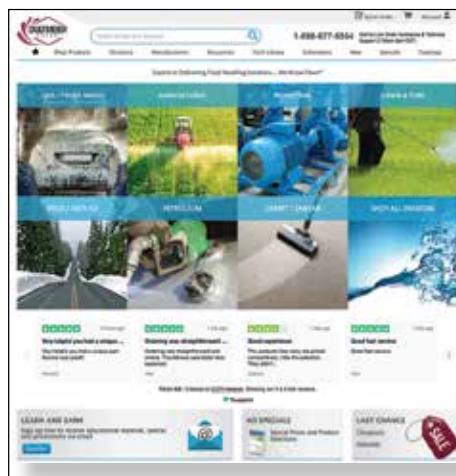

dultmeier.com

View this catalog & Order on-line!