


**Bypass/Dump Guns**

**Bypass or Dump Guns** are designed to allow low pressure spray while the trigger is in the released position and high pressure when the trigger is pulled. Protection against freeze-up with no restriction through gun to prevent freeze control flow. *General or Cat.*

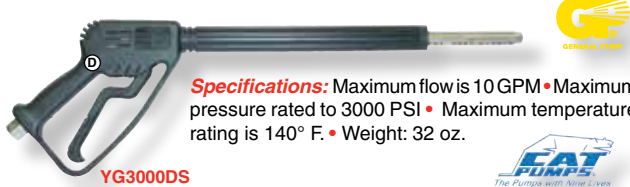

**Specifications:** Maximum flow is 10 GPM • Maximum pressure rated to 3000 PSI • Maximum temperature rating is 140° F. • Weight: 32 oz.

Part No.	Brand	Barrel Length	Inlet	Outlet
IP YG3000DS	GENERAL	16"	3/8" FPT	1/8" FPT
IP YG3000D	GENERAL	40"	3/8" FPT	1/8" FPT
CC 32300	CAT	15"	3/8" FPT	1/8" FPT
CC 32301	CAT	39"	3/8" FPT	1/8" FPT



**Trigger Guns**

Ideal for self-serve car wash use or general cleaning applications.

**Features:** Durable heat resistant trigger means longer life, less breakage • Contour design and smooth trigger action reduces operator fatigue • Stainless steel ball and seat • Rated to 300° F. • 3/8" FPT Inlet and 1/4" FPT Outlet.

Part No.	Seat	Max. PSI	Max. Flow
CC 76165	Zero	3000	8.0
CC 76168	Weep	3000	8.0
CC 36130	Zero	5000	10.5
CC 36131	Weep	5000	10.5



**Front Entry Trigger Guns**

These rugged lightweight guns are durable enough for continuous on/off operation in Car and Truck washes and pressure cleaning. Ratings: 3000-PSI, 10-GPM & 300° F.

**Features:** Glass reinforced plastic body • Stainless Steel seat insert, ball and actuating rod • Forged brass valve housing • Viton® seals • Available with either zero-leak or weep-style seats • Good balance and light trigger pull • No liquid flow through the handle so 300 degree fluids can be used comfortably • Extremely durable, yet lightweight.



Front Entry Style

Part No.	Seats	Inlet	Outlet
UP UST-0	Zero Leak	3/8" FPT	1/4" FPT
UP UST-1	Weep Style	3/8" FPT	1/4" FPT
UP UST-2	Zero Leak	3/8" FPT	3/8" FPT
UP 35020	Replacement Seal for UST-0 & UST-1 Guns.		
UP 40054	Repair Kit for UST-0 and UST-1 Guns.....		

**High Pressure Trigger Wand With Spring Loaded Trigger Stop**



**Safety Trigger Wand with Spring Loaded Trigger Stop** is designed to prevent against accidental trigger pull or activation. Trigger stop must be manually closed in order to operated wand. Comfortable hand grip accommodates gloved hands. Zero leak seat. Rated to 5000 PSI, 10 GPM and 320° F. Inlet is 3/8" FPT and outlet is 1/4" FPT.

Part No.	Max. Flow	Max. PSI
IP DGE5010SL	10.5 GPM	5,000



**Easy Pull Trigger Guns**

**Heavy-Duty, Trigger Wands.** Light trigger pull means less hand fatigue. Ideal for car/truck wash, mobile cleaning, pressure wash and industrial cleaning. **SG35A** can be used for all applications listed above but is also rated for acid solutions. **SG35SB** is blue food grade with built in stainless swivel. All wands have 3/8" FPT inlet x 1/4" FPT outlet. Rated to 320° F. except M407A which is 250° F. Zero leak seats.

SG35  
SG35A  
SG40



Part No.	Max. PSI	Max. Flow
MV M407A	4000	7 GPM
MV SG28	4000	12 GPM
MV SG35	5000	12 GPM
MV SG35A	* 5000	12 GPM
MV SG35SB	** 5000	12 GPM
MV SG40	5800	8 GPM

\* Can Be Used for Acid Solutions. \*\* Stainless Steel.

**Box Type Spray Wands & Extensions**

**Spray Gun/Extensions Units** for replacements on box store pressure washers. Gun extension outlets are 22mm and designed for **AL248** spray lances. Gun inlet is either 3/8" FPT or 22mm to match up to 22mm or 3/8" MPT hose assemblies.

**BT105** Spray wand has 22mm inlet x 22mm extension outlet. Extension is 19" long. Rated to 8 GPM, 3000 PSI and 212° F.



**AL12** Spray wand has 3/8" FPT inlet x 22mm extension outlet. Extension is 19" long. Rated to 8 GPM, 3000 PSI and 140° F.



**AL248** Spray lance is designed with 22mm inlet to match to wands above. Outlet is 1/4" MPT. Length is 24". Rated to 10 GPM, 5000 PSI and 300° F. Zinc construction.




**AL248C** Spray lance is designed with 22mm inlet to match wands above. Outlet is 1/4" female quick coupler. Length is 24". Rated to 10 GPM, 5000 PSI and 300° F. Zinc construction.

Part No.	Description	Inlet	Outlet
AR BT105	Spray Gun with Extension...	22mm	22mm
AR AL12	Spray Gun with Extension...	3/8" FPT	22mm
AR AL248	24" Lance .....	22mm	1/4" MPT
AR AL248C	24" Lance .....	22mm	1/4" QC

**Trigger Wand Splitters**

Designed for single feed from your pressure washer and then branch off to feed two or three wands. Available with brass quick coupler and plated plugs or stainless steel quick coupler and stainless steel plugs. High pressure, plated tees and crosses. (*Splitter assemblies do not include wands*).



Part No.	Style	GPM	PSI	QC Inlet	QC Outlet
BI SPL001	2 Wand	8	4200	3/8" Brass	3/8" Plated
BI SPL002	2 Wand	8	6000	3/8" S.S.	3/8" S.S.
BI SPL004	2 Wand	12	4200	1/2" Brass	1/2" Plated
BI SPL003	3 Wand	8	4200	3/8" Steel	3/8" Plated