




Pressure Wash Reels

Manual Rewind Hose Reel from Hannay. Ideal for portable or stationary pressure wash applications.

Standard Features:

- Manual Rewind
- Constructed of 12 & 16 gauge steel with black, powder-coated finish
- Rated to 4000 PSI and 400° F.
- 1/2" Inlet swivel, 3/8" outlet fitting & adjustable bearing brake are standard
- Hose guide roller assembly is also included
- Rated to 12 GPM flow rate
- Capacity is 150' of 3/8" I.D. hose
- Mounting base is included, but a variety of mounting kits are also available for pivot option or for mounting to square or round tubing

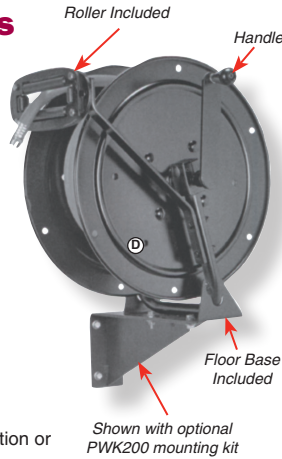

Part No.	Capacity	Wt.
HN PW2	Reel with Base & Roller 150' of 3/8" I.D.	30 lbs.

Optional Mounting Kits

Part No.	Description
HN PWK150	For Floor Mounting with Ability to Pivot.....
HN PWK200	For Wall Mount, Non Pivot.....
HN PWK400	For Wall Mount with Ability to Pivot.....
HN PWK300	For Mounting to 1" Round Tubing, No Pivot.....
HN PWK301	For Mounting to 1-1/4" Round Tubing, No Pivot.....
HN PWK302	For Mounting to 1" Square Tubing, No Pivot.....
HN PWK303	For Mounting to 1-1/4" Square Tubing, No Pivot.....



High Pressure Hose Reels

Pressure Wash Hand Rewind Hose Reels. D3 series reels are semi-professional design rated to 225° F and 4000 PSI. All other reels are professional duty rated to 250° F and 5000 PSI. Steel reels feature a durable, black powder coated finish.



Part No.	Type	Capacity	Max. PSI	Wt.
IP D30002	Powder Coated Steel	3/8" x 100'	4000	9 lbs.
IP D32004	Powder Coated Steel	3/8" x 150'	4000	15 lbs.!
IP D30006	Powder Coated Steel	3/8" x 200'	4000	16 lbs.
IP DHR50100D	Powder Coated Steel	3/8" x 100'	5000	18 lbs.
IP DHR50150D	Powder Coated Steel	3/8" x 150'	5000	19 lbs.
MV 271004	Stainless Steel	3/8" x 100'	5000	10 lbs.
IP DHR50150SS	Stainless Steel	3/8" x 150'	5000	15 lbs.!
IP SHR50	*Stainless Steel	3/8" x 100'	5000	18 lbs.
AR 151	*Stainless Steel	3/8" x 250'	5000	25 lbs.
IP 2100379	Swivel wall plate for D3 & DHR reels			9 lbs.
IP 2100531	Fixed wall plate for D3 & DHR reels			7 lbs.

* Stainless reel with plated steel base.



Spring Rewind Pressure Washer Reels

Spring Rewind Pressure Washer Reels from Reelcraft. High quality steel construction with red powder-coated finish. Ideal for use in shops and garages. Rated to 5,000 PSI and 212° F. Designed for 1/4" or 3/8" I.D. hose, (not included). Fast, automatic return of hose into reel drum keeps hose out of the way and off the floor.



PW81000OHP
(Hose not included)




Part No.	Hose Capacity	Max. PSI	Wt.
RF PW7600OHP	3/8" x 50'	5,000	43 lbs.
RF PW81000OHP	3/8" x 100'	5,000	86 lbs.

REELCRAFT Series 3000 Hose Reels

Series 3000 Hose Reels from Reelcraft are available in either Hand Crank or 12Volt rewind. Designed for rugged applications requiring long lengths of hose storage.

Features: Vibration-proof, self-locking fasteners • Heavy-gauge steel frame with all bolted, unitized construction • Full flow swivels with Aflas seals except for CA32112L and CA32118L which are Buna • Rated to 1000 or 3000 PSI as shown • Maximum temperature is 210°F. (Roller hose guides available).

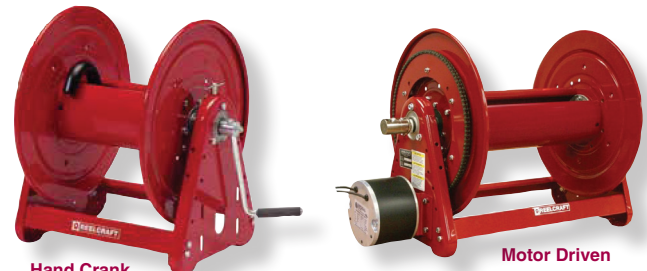

Hand Crank

Motor Driven



Part No.	Rewind	Capacity	PSI	Dimensions			Wt.
				High	Deep	Wide	
RF CA32112L	Hand	1/2" x 200'	1000	20"	18"	26"	46 lbs
RF CA32118L	Hand	1/2" x 325'	1000	20"	18"	32"	51 lbs
RF CA32118M	Hand	1/2" x 325'	3000	20"	18"	32"	52 lbs
RF CA33112L	Hand	3/4" x 100'	1000	20"	18"	26"	46 lbs
RF CH37118L	Hand	1" x 100'	1000	20"	18"	32"	64 lbs
RF EA32118L12D	12 Volt	1/2" x 325'	1000	20"	18"	30"	68 lbs
RF EA33118L12D	12 Volt	3/4" x 175'	1000	20"	18"	30"	68 lbs
RF EH37118L12D	12 Volt	1" x 100'	1000	20"	18"	31"	82 lbs



@Dultmeier Sales



FOLLOW US!



@dultmeier

