

Drum Faucet Valves

Polyethylene Drum Faucets for handling a wide variety of liquid products. Chemical resistant construction to handle petroleum products, ag chemicals, presoaks, tire cleaners, waxes, etc.

D1050 is a natural, semi-clear polyethylene faucet with a 3/4" MPT inlet and tapered discharge. Adjustable control handle easily regulates flow.

D1050-2 is a gold polyethylene faucet with a 2" MPT inlet and tapered 2" outlet. Standard with EPDM bung gasket. Adjustable control handle to regulate flow.



Part No.	Description	* Std. Pkg.
BP D1050	3/4" Poly Faucet.....	24
BP D1050-2	2" Poly Faucet.....	10


*** Extra 10% Discount if Ordered in Standard Package Quantity.**

633 Barrel Faucet

MPT X MPT


CONSTRUCTION DETAILS:

Body: Brass **Plug:** Brass
Handle: Pressed Steel **Spring:** Brass

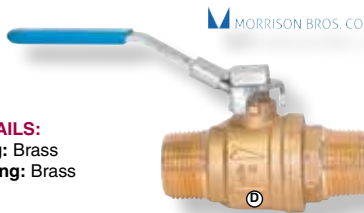

Part No.	Wt.
MB 633	1" Barrel Faucet 2 lbs.

1" Male Pipe Threads

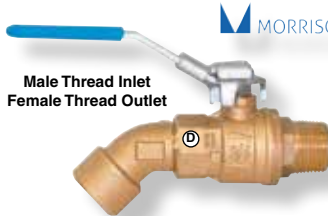

Male Thread Inlet
Female Thread Outlet

699F Barrel Faucet

MPT X FPT

CONSTRUCTION DETAILS:

Body: Brass **Plug:** Brass
Handle: Pressed Steel **Spring:** Brass

Part No.	Barrel Faucets
MB 699F-3/4	3/4"MPT x FPT
MB 699F	1"MPT x FPT



Prices Are Some of the Cheapest . . .

"Prices are some of the cheapest I've found, and I've price checked everything we buy from Dultmeier, and of great quality. All our orders are shipped promptly as long as the items are in stock, otherwise they are shipped as soon as they are in stock. I would Highly recommend shopping Dultmeier for all your needs!"


Shay

189-G 75 Degree Aluminum Nozzle



For gravity and low pressure flows Available with or without the 36" long brass tube.

MORRISON BROS. CO.

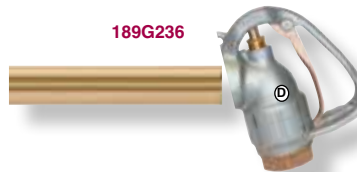

CONSTRUCTION DETAILS


Body: Aluminum **Stem:** Brass
Disc: Viton® **Tube:** Brass

Part No.	2" 75° Aluminum Nozzle	Wt.
MB 189G236	2" Nozzle with 36" Brass Tube.....	19 lbs.
MB 189G-2	Nozzle Only (Less Tube).....	9 lbs.
MB 36T	36" Brass Replacement Tube Only	-

AC Oil Pump

5 GPM

This Compact 115 Volt Electric Oil Pump produces a maximum flow rate of 5 GPM. Maximum viscosity is 30 wt. Designed to fit 55 gallon drums up to 330 gallon totes. The non-drip tip allows for filling measures and containers easily and reduces spills. Approximately 12" of clearance between the barrel and discharge spout. Includes a 20 volt DC power supply with 6 amp output. Compatible with oil, automatic transmission fluid, windshield wash fluid and anti-freeze. The telescoping suction tube extends from 33.5" to 49".
Note: Only pump up to 10wt - 30wt oils.

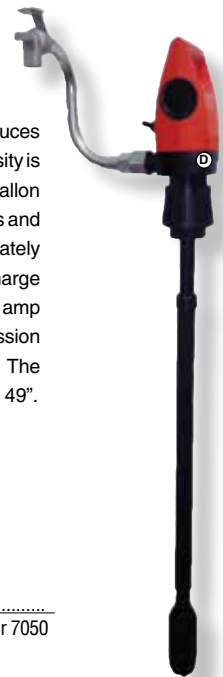

Part No.	Description
NS 7050	115 Volt AC Oil Pump, 5 GPM.....
NS 7051	Replacement 20 Volt DC Power Supply for 7050



Viton® is a registered trademark of DuPont Performance Elastomers