

LARGE QUANTITY DISCOUNTS: LESS 15% For Purchases in Bags of 10 Not Assorted - 20% On 100 Assorted Fittings in Bags of 10 - 30% on 1000 Assorted Fittings in Bags of 10.

To Connect
Push tubing into fitting



Pull on the tube to check that it is secure. Test the system before use.




To Disconnect

Make sure that the system is depressurized, then push the collet square against the fitting. With the collet held in this position, the tube can be removed.

JG Shut-Off Valves (Tube x Tube)

John Guest Shut-Off Valves are manufactured in white polypropylene or black polypropylene with EPDM seals for chemicals or water, (not for compressed air) or gray acetal with nitrile for use with liquids and compressed air. Rated to 150 PSI at 70° F.

Inline Valve, Tube x Tube

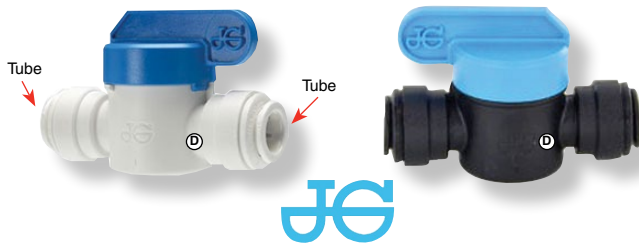


Part No.	Tube O.D.	Tube O.D.	Tube Type	Discount Pkg/50
LM PSV5	1/4"	1/4"	White	10%
LM PSV10	3/8"	3/8"	White	10%
LM PSV04	* 3/8"	3/8"	Gray	10%
LM PSV06	* 1/2"	1/2"	Gray	10%
LM BVS14	1/4"	1/4"	Black	10%
LM BVS38	3/8"	3/8"	Black	10%

* Rated for Use with Compressed Air.

Inline Valve, Tube x MPT

Poly / EPDM

Part No.	Tube O.D.	MPT	Type	Discount Pkg/50
LM PSV20	1/4"	1/4"	White	10%
LM PSV35	3/8"	3/8"	White	10%

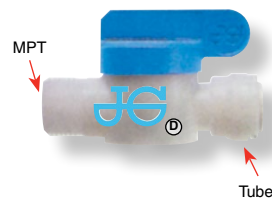

JG Inline Valve, Female x Tube



Part No.	Tube O.D.	FPT	Type	Discount Pkg/50
LM PSV40	1/4"	1/4"	White	10%
LM PSV55	3/8"	1/4"	White	10%

Push-Fit Check Valves (Inline Tube x Tube)

Allows flow in only one direction. White or Black Acetal bodies. Liquids only, not for compressed air. Rated to 150psi @65° F. For water or chemicals rated for bodies and O-rings.



Part No.	Tube O.D.	Body & O-ring	Cracking PSI	Discount Pkg/10
LM SCV14	1/4"	White, Buna	1/3 PSI	15%
LM NC2718	1/4"	White, Buna	5 PSI	15%
LM NC2718E	1/4"	Black, Buna	5 PSI	15%
LM SCV38	3/8"	White, Epdm	1/3 PSI	15%
LM SCV12	1/2"	White, Buna	1/3 PSI	15%

Polypropylene Check Valves

- Vitor® Seals • 316SS Spring & Ball
- Tube x Tube



Part No.	Tube O.D.	Opening Pressure (PSI)
BU CV1101-P14	1/4"	1.0
BU CV1101-P56	5/16"	1.0
BU CV1101-P38	3/8"	1.0

Push Lock Check Valve



- Buna Seals • 1/2" x 1/2" Acetal Body, Nitrile Seal
- Push Tube Connect



Part No.	Size
LM ACHV0707	1/2" x 1/2"

Push True-Seal™ Check Valves




Push-to-Connect Check Valves ensure protection against reverse flow. Can be used with thermoplastic or soft metal tubings. Acetal body and EPDM o-ring are designed for liquids only. Rated for +34° F. to 150° F. and up to 150 PSI. Cracking pressure is 1/3 PSI.

Part No.	Tube	Tube
PA A4VC4	1/4"	1/4"
PA A6VC6	3/8"	3/8"

10% Discount on Packs of 25

DMfit® Push-Lock Needle Valves

Inline Metering Valves with push-lock design for hard wall tubing. Highly durable and fatigue-resistant. Available in 1/4" and 3/8" sizes. Tube x tube. Rated to 145 PSI and 150° F. White acetal construction.



Part No.	Tube O.D.	Style
LM ACUC0404	1/4"	Tube x Tube Tee
LM ACUC0606	3/8"	Tube x Tube Tee