

Radiant Heaters




Ideal for Car/Truck Washes, Detail Centers, Auto Service Shops, Farm Buildings, Warehouses, Manufacturing Facilities & Almost Anywhere Heat is Required

Re-Verber-Ray Tube Heaters from *Detroit Radiant*. LP or Natural Gas Fired. 20-50% operating savings over conventional heat systems. Designed to heat floor zones, equipment and people, not the ceiling. No noisy blowers, just quiet, energy efficient operation. Ideal for car/truck washes, detail centers, auto service shops, farm buildings, warehouses, manufacturing facilities and almost anywhere heat is required.

Standard Features on All Units Include: 4" x 10", 16 gauge radiant tubes • 24" Flexible gas line • Hot surface ignition • CSA, UL, IAS, CE rated • 120V, 60Hz • 4" Duct intake • Operating indicator lights • 1/2" NPT gas inlet • Made in the USA.

Note: Gas requirements are 5" minimum WC Natural Gas and 11" minimum WC LP Gas. Straight or U-tubes style as noted.

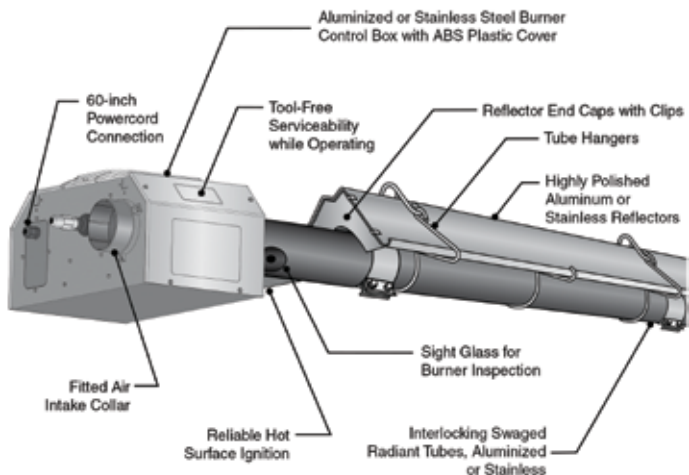

**DX3 & DXSS are 1-Stage Models.
HL3 2-Stage Models
Also Available**

DX3 Alumined Steel Units are ideal for general heating applications.

Coated Alumined Combustion Chamber • 4" Coated Alumined Steel Radiant Tubes • Polished Aluminum Reflectors • 50,000 to 200,000 BTU • 20' to 80' Lengths.

Straight Tube Models

Part No.	Length	* BTU	Tube	Recommended Mount Height	Wt.
DT DX3-20-50S	21' 9"	50,000	Straight	9' - 15'	120 lbs.
DT DX3-20-75S	21' 9"	75,000	Straight	11' - 18'	120 lbs.
DT DX3-30-75S	31' 5"	75,000	Straight	12' - 20'	160 lbs.
DT DX3-30-100S	31' 5"	100,000	Straight	13' - 23'	160 lbs.
DT DX3-40-100S	41' 1"	100,000	Straight	13' - 23'	190 lbs.
DT DX3-40-125S	41' 1"	125,000	Straight	14' - 25'	190 lbs.
DT DX3-40-150S	41' 1"	150,000	Straight	15' - 27'	190 lbs.
DT DX3-50-100S	50' 9"	100,000	Straight	15' - 27'	290 lbs.
DT DX3-50-125S	50' 9"	125,000	Straight	15' - 27'	290 lbs.
DT DX3-50-150S	50' 9"	150,000	Straight	15' - 27'	290 lbs.

* Specify LP or Natural Gas.

U-Tube Models

Part No.	Length	* BTU	Tube	Recommended Mount Height	Wt.
DT DX3-20-50U	13' 1"	50,000	U-Tube	9' - 15'	120 lbs.
DT DX3-30-100U	17' 9"	100,000	U-Tube	13' - 23'	160 lbs.
DT DX3-30-125U	17' 9"	125,000	U-Tube	14' - 25'	160 lbs.

* Specify LP or Natural Gas.

Call Toll Free For Prices



Vehicle Storage

DXSS Stainless Steel Units are designed for moist/wet/harsh environments like car wash and truck wash facilities.

Coated Stainless Combustion Chamber • Coated Stainless Steel Radiant Tubes • Polished Stainless Reflectors • Stainless Burner • 75,000 to 150,000 BTU • 20' to 60' Lengths.

Straight Tube Models

Part No.	Length	* BTU	Tube	Recommended Mount Height	Wt.
DT DXSS-20-75S	21' 9"	75,000	Straight	11' - 18'	145 lbs.
DT DXSS-30-75S	31' 5"	75,000	Straight	12' - 20'	195 lbs.
DT DXSS-30-100S	31' 5"	100,000	Straight	13' - 23'	195 lbs.
DT DXSS-40-100S	41' 1"	100,000	Straight	13' - 23'	235 lbs.
DT DXSS-40-125S	41' 1"	125,000	Straight	14' - 25'	235 lbs.
DT DXSS-40-150S	41' 1"	150,000	Straight	15' - 27'	235 lbs.
DT DXSS-50-100S	50' 9"	100,000	Straight	15' - 27'	290 lbs.
DT DXSS-50-125S	50' 9"	125,000	Straight	15' - 27'	290 lbs.
DT DXSS-50-150S	50' 9"	150,000	Straight	16' - 30'	290 lbs.

* Specify LP or Natural Gas.

U-Tube Models

Part No.	Length	* BTU	Tube	Recommended Mount Height	Wt.
DT DXSS-20-75U	13' 1"	75,000	U-Tube	11' - 18'	145 lbs.
DT DXSS-30-75U	17' 9"	75,000	U-Tube	12' - 20'	195 lbs.
DT DXSS-40-100U	22' 9"	100,000	U-Tube	13' - 23'	235 lbs.
DT DXSS-40-125U	22' 9"	125,000	U-Tube	14' - 25'	235 lbs.
DT DXSS-40-150U	22' 9"	150,000	U-Tube	15' - 27'	235 lbs.

* Specify LP or Natural Gas.

Call Toll Free For Prices



Distribution Facilities / Warehouses

Accessories

Part No.	Description
DT THET5	Thermostat, Dry Environments, 24-240V
DT TH115	Thermostat, Wet Environments, 24-120V
DT THCS	5' Chain & Hook Set, One Required Every 10' Section, Plus (3) Per Burner Box.
DT 4DSK	Side Wall Vent Kit, 4" x 18"
DT RTVP4	Roof Vent Kit.....
DT BVP4	4" x 60" Double Wall Vent Pipe

Call Toll Free For Prices