


tigerflex® Flex Joint Hoses




Specified Length is Overall Assembly Length.


Flex Joint Hoses help to eliminate hoses breaking off at the truck. Can be used for suction or discharge. Clear PVC construction with blue helix spiral. Rated from -40° to 150° F. Standard with female lever coupler on one end and male adapter on the other end. Overall length is 3' 6". Available in 3" or 4" sizes.

Part No.	I.D.	Length	Wt./Lbs.
DU BW300X3	3"	3'	7
DU BW400X3	4"	3'	11

Sewer Hose Guides



Includes Nylon Rope



Sewer Hose Guides are perfect for protecting your sewer hoses from abrasion and wear. Available 3' long in either 2", 3" or 4" sizes. Sewer hoses slide freely inside these assemblies. 20' rope is also included for easy pull out when finished.

Part No.	I.D. x Length
DU TT3X3	3" x 3'
DU TT4X3	4" x 3'

BluSeal BluSeal Water Hoses

BluSeal Water Hoses are the strongest, lightest, most flexible rubber water hoses made. Ideal for a wide variety of washdown applications.

- 40% Lighter than standard rubber hoses
- 5/8", 3/4" and 1" sizes
- Plated Brass, 3/4" garden hose fittings
- Bend Restrictors for reduced bend stress
- Handles hot water to 212° F.
- Flexible down to -50° F.
- Covers are Ozone, Abrasion and Kink resistant
- 100% Rubber construction
- High strength, polyester reinforced braid
- Rated to 300 PSI
- Industry Leading 10-Year Limited Warranty.



Garden Hose Fittings



Part No.	ID/Length	Flow@ 35 PSI	** Std. Pack	Wt.
RX BS5806	* 5/8" x 6'	10 GPM	5	1.0 lbs.
RX BS5815	* 5/8" x 15'	10 GPM	4	2.7 lbs.
RX BS5825	5/8" x 25'	10 GPM	4	4 lbs.
RX BS5850	5/8" x 50'	10 GPM	4	7 lbs.
RX BS58100	5/8" x 100'	10 GPM	2	13 lbs.
RX BS58150	5/8" x 150'	10 GPM	-	19 lbs.
RX BS3406	* 3/4" x 6'	11 GPM	5	1.3 lbs.
RX BS3415	* 3/4" x 15'	11 GPM	6	3 lbs.
RX BS3450	3/4" x 50'	11 GPM	3	8 lbs.
RX BS34100	3/4" x 100'	11 GPM	-	15 lbs.
RX BS34150	3/4" x 150'	11 GPM	34	8 lbs.
RX B50NE15	* 1" x 15'	20 GPM	4	4 lbs.
RX B50NE50	1" x 50'	20 GPM	2	9 lbs.
RX B50NE100	1" x 100'	20 GPM	-	17 lbs.

* This size is ideal as feed hoses to reels or pumps.
** 5% discount for orders in standard packs.



Sandblast Hose
T751 Heavy Duty Sandblast Hose.
Sold in 25' & 50' lengths only.

Part No.	I.D. x O.D.
TF T751-075	3/4" I.D. x 1-1/2" O.D.

Please remember there are No Returns on customer specified cut lengths of hose.

King Bee™ Suction Hose

Liquid Suction Hose Assemblies. Highly flexible, crush and wear resistant. An ideal choice for wastewater transfer, dewatering, trash pumps, septic systems, portables cleanout and more.

Flexible, polyethylene construction is rated from -40° to +150° F. Will not crush or kink. Heavy-duty exposed ribs protect tube from wear and allow sliding over rough surfaces. Leak-proof cuffs are factory installed and will not separate from the hose. 29 In. Hg vacuum rating and 7-15 PSI discharge pressure at 68° F. (From the makers of TigerFlex).



Part No.	Size	Max. PSI @ 68° F.	Wt.
TF KBEE200X20	2" x 20'	15 PSI	17 lbs.
TF KBEE200X25	2" x 25'	15 PSI	21 lbs.
TF KBEE200X30	2" x 30'	15 PSI	26 lbs.
TF KBEE200X40	2" x 40'	15 PSI	34 lbs.
TF KBEE200X50	2" x 50'	15 PSI	43 lbs.
TF KBEE200X60	2" x 60'	15 PSI	51 lbs.
TF KBEE300X20	3" x 20'	7 PSI	32 lbs.
TF KBEE300X30	3" x 30'	7 PSI	48 lbs.



Grain Probe & Vacuum Hose

1-1/4" • 1-1/2" • 2" I.D. — Supplied in 15', 25' & 50' Lengths

CP Model
REGULAR DUTY — with Ribbed Exterior


GV Model
HEAVY-DUTY with Smooth Flat Exterior



Part No.	Size	I.D.	Length	Color
FX CP-1-1/4x15	15' Hose Only	1-1/4"	15'	Grey
FX CP-1-1/4x50	50' Hose Only	1-1/4"	50'	Grey
FX CP-1-1/2x15	15' Hose Only	1-1/2"	15'	Grey
FX CP-1-1/2x50	50' Hose Only	1-1/2"	50'	Grey
FX CP-2x15	15' Hose Only	2"	15'	Grey
FX CP-2x50	50' Hose Only	2"	50'	Grey
FX GV12X15	15' Hose Only	1-1/2"	15'	Grey/Black
FX GV12X25	25' Hose Only	1-1/2"	25'	Grey/Black
FX GV12X50	50' Hose Only	1-1/2"	50'	Grey/Black
FX GV2X15	15' Hose Only	2"	15'	Grey/Black
FX GV2X25	25' Hose Only	2"	25'	Grey/Black
FX GV2X50	50' Hose Only	2"	50'	Grey/Black

Universal Air & Water Couplings

- Plated Iron -

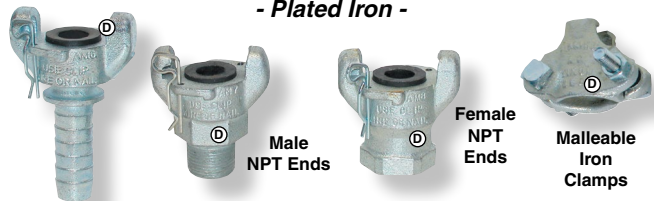

Hose Ends

COUPLINGS FOR USE UP TO 150 PSI
- Not for Use With Steam -

Part No.	Size
EV AM1	Hose End 1/2"
EV AM6	Hose End 3/4"
EV AM11	Hose End 1"
EV AM2	Male NPT Ends 1/2"
EV AM7	Male NPT Ends 3/4"
EV AM12	Male NPT Ends 1"
EV AM3	Female NPT Ends 1/2"
EV AM8	Female NPT Ends 3/4"
EV AM13	Female NPT Ends 1"
EV AWR4	Washer ALL
EV A9	Clamps 1-1/8" to 1-5/16" O.D.
EV A10	Clamps 1-5/16" to 1-1/2" O.D.



WASHER
Same Size
for all
Coupling Sizes