



Remote Controlled Power Rewind Reels

To Handle Single 3/8" or 1/2" I.D. Hose

Standard Features:

- Heavy-Duty 12V DC 1/3 HP Electric Reel.
- Bidirectional Remote Control (Power In, Power Out) with Over 500 Ft. Range. (Military Grade, Environmentally Sealed Electronics Including Over-Current, Temperature & Under Voltage Protection).
- Variable Speed Control Allows User to Choose Comfortable Unwind/Rewind Speed.
- Robust Remote Control with Belt Clip is Weather & Impact Resistant.
- Remote is Rechargeable with Low Battery Light (Typical Time Between Charges is 3 to 4 Months).
- All Rewind, Unwind, & Speed Control Functions are Controllable from either Remote Control or Base station.
- Optional Emergency Stop Control Button Allows Engine/ Pump to be Turned Off Remotely.
- Fully Adjustable Brake Prevents Hose Movement During Transit.
- Standard Inlet is 90° Ball Bearing Swivel Joint with 1/2" Female NPT Threads; 1/2" FPT Outlet.
- Pressures to 3,000 PSI.
- Temperatures from +20° F. to +400° F.



Part No.	Description	Hose I.D.	Capacity	Wt. Lbs.
HN RM-3006	Remote Control Hose Reel	3/8"-300'	1/2"-150'	138
HN RM-3006X	Remote Control Hose Reel, No "Power Out", Keyfob	3/8"-300'	1/2"-150'	138
HN RM-3008	Remote Control Hose Reel	3/8"-500'	1/2"-300'	145
HN RM-3008X	Remote Control Hose Reel, No "Power Out", Keyfob	3/8"-500'	1/2"-300'	145
HN RMS	Optional Pump "Stop" Feature inside Remote.....			

Call Toll Free For Prices


Dimensions: RM-3006: 26.75" x 16.5" x 28.25" High; RM-3008: 31.75" x 16.5" x 33.63" High.

Diesel Exhaust Fluid (DEF) Hose Reel Packages



All Packages include the *Hannay N800 DEF Series Spring Rewind Reels* - Long the industry standard for durable, compact and efficient handling of single hose. Safe, non-sparking, self-powered industrial duty spring motors with S.S. internals and "True Blue" DEF hose with stainless steel MNPT ends.

Roller Positions Available

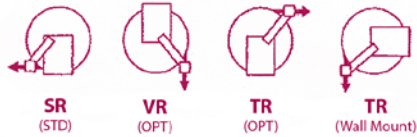

Part No.	Description
HN 48-21	N816 DEF Series Spring Rewind Reel, 304SS Fluid Path, 1" SST Peroxide Cured Swivel Joint with EPDM Seals, 3/4" Female NPT Riser, 3/4" x 25' "Tru Blue" DEF Hose with 3/4" SS MNPT Fittings, HS-35 Hose Stop Installed. * Specify Roller Position - See Above Chart, Note SR Position is standard.....
HN 48-36	Same as Above Except with N818 DEF Series Reel and 3/4" x 50' DEF Hose Assembly
HN 48-37	Same as Above Except with 1" Female FT Riser and 1" x 25' DEF Hose Assembly
HN 48-42	Same as Above Except with 1" Female FPT Riser and 1" x 50' DEF Hose Assembly

REELCRAFT Fuel Delivery & DEF Reels

Spring Rewind Fuel Delivery Reels from *Reelcraft*. Designed for mobile delivery applications. Corrosion-resistant, powder-coated finish. Swivels feature Viton® seals. Fuel rated hoses are included, but reels can also be ordered less hose if required. Three frame styles as noted by model. All reels have adjustable bumper stops on hose. Fuel models are rated for use with diesel and gasolines up to E85. Rated to 50 PSI. DEF models are rated for diesel emissions fluid. Rated to 300 PSI.

Fuel Models		Dimensions			
Part No.	Hose	H	W	D	Wt.
RF F79250LP	3/4" x 25'	20"	7"	20"	47 lbs.
RF F830500LP	3/4" x 50'	25"	10"	24"	89 lbs.
RF FD830750LP	3/4" x 75'	25"	13"	24"	115 lbs.
RF FD840500LP	1" x 50'	25"	16"	24"	115 lbs.
RF FD93500LPBW	3/4" x 50'	26"	12"	26"	140 lbs.
RF FD94500LPBW	1" x 50'	26"	12"	26"	157 lbs.

DEF Models		Dimensions			
Part No.	Hose	H	W	D	Wt.
RF UR78500LB	1/2" x 50'	20"	7"	20"	51 lbs.
RF UR79250LB	3/4" x 25'	25"	7"	20"	53 lbs.
RF UR830500LB	3/4" x 50'	25"	10"	24"	93 lbs.

Viton® is a registered trademark of DuPont Performance Elastomers



F79 / UR78 / UR79

F83 / FD83 / FD84 / UR83



FD93 / FD94