



M30-G8N

## GPI® M30 Fuel Meters

— **Reliable & Affordable** —

- 5 to 30 GPM (Both Sizes)
- Operating Temperature: -20° F. to +125° F.
- Quick Fit Modularity
- Magnetic Drive
- Simple 4-Bolt Connections to Mount in Multiple Directions
- Typical Accuracy: ±2%
- 3/4" or 1" FNPT Inlet & Outlet
- For Use with Gasoline (to E15), Diesel (to B20) & Kerosene

**Part No.**

- GI M30-G6N 3/4" FNPT Fuel Meter.  
GI M30-G8N 1" FNPT Fuel Meter....


## GPI® QM40 Fuel Meter

- Extreme Accuracy within ±1/2%
- Oval Gear Technology
- Magnetic Drive Eliminates Drive Shaft Leaks
- Quick-Fit Modular Connections; 1" FNPT
- Maximum Work Pressure of 50 PSI
- Operating Temperature of -20° to +125° F.
- For Use with Gasoline (Up to 15% alcohol blends like E15), Diesel Fuel (Up to 20% biodiesel blends such as B20) & Kerosene
- 5 Year Warranty



**Part No.**

- GI QM40-G8N 3/4" FNPT Fuel Meter.

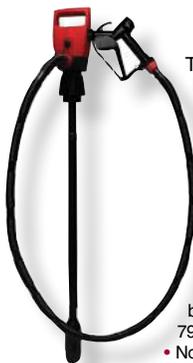

## Drum Pump

- 19.2 Volt Lithium -

This unit is designed for the transfer of DEF, Alcohol, Detergents and many other Water Based Fluids such as antifreeze, chemical insecticides and soaps. Fitted with a rechargeable 19.2 Volt lithium battery, the unit delivers 7GPM maximum flow. The pump will deliver 106 gallons per charge at a maximum of 5.3 PSI. This pump uses the same battery as the 912-19 and 912-19L. Has Viton® elastomers.

**Features:** Also compatible with petroleum products such as diesel and kerosene • Includes stainless steel telescoping suction tube that extends from 33.5" to 40" • Includes 2" NPT bung adapter and 2" buttress adapter for plastic drums • Includes 79" hose and polypropylene nozzle with 3/4" stainless steel spout • Nozzle holster built into the pump body • NOT Recommended for gasoline or oil • 2 Year Limited Warranty.

**Part No.**

- NS 7019L 19.2V Lithium Pump, Nozzle & Pickup Tube .....

## SERVICE & REPAIRS

*Did you know?*

We can service almost every brand of pump we sell in our catalog.

Call us at **1-800-228-9666** (Omaha, NE) for a quote!



## DEF Digital Meter



- Nylon Digital Turbine Meter with 1" FNPT
- Flow rate is 3 to 30 GPM
- Powered by (2) AAA Batteries
- 150 PSI Rating
- 1.5% Accuracy
- 6 Digit Resettable Batch & Non-Resettable Cumulative Totalizers
- Plus or Minus 1/2% Accuracy Possible with User Calibration Feature

**Part No.**

GI 1N31GM-U

**Description**

DEF Digital Meter.....

## Dura Meter DEF Digital Meter



- Fully Moisture Sealed Electronics & Display
- Backlit Display (2" Tall) With Large 3/4" Tall Flow Digits
- (4) AAA Batteries for Extended Life
- Lexan Faceplate & Lined With Santoprene for Tough Durability
- 2-22 GPM; 0.5% Accuracy; Maximum 40 PSI; -10° to +130° F.
- 1" FPT Ports for Both Inline & 90° Plumbing

**Part No.**

DP 3000D

**Description**

DEF Digital Meter.....

## SHURFLO® 12 Volt Oil Change System

Makes a messy job clean and easy. Simply install the oil probe in the engine oil dipstick tube, attach the battery clips and flip the switch. Oil is safely removed and stored in the easy-to-carry container. Oil should be heated to 140° F. for maximum pump efficiency.

**Features:** Complete with necessary tubing and oil storage container • Eight foot cable with battery clips • Thermal overload protection • BUNA-N impeller • 3/8" FPT • 1.4 GPM Open Flow.



**Part No.**

- SU 8050-305-426 12 Volt Oil Change System  
SU 8050-305-526 12 Volt Replacement Pump  
SU 8000-633-236 115 Volt Replacement Pump



**Great Customer Service!**

"Great Customer Service. Cathy was very helpful

Thank you Cathy"

Pierre

Viton® is a registered trademark of DuPont Performance Elastomers