

# Straight Centrifugal Pumps


## Myers Two-Stage, Straight Centrifugal Pumps Heads to 400 ft. (175 PSI) & Flows to 140 GPM

**Myers Two Stage Pumps** are designed and built for rugged continuous-duty service. Applications include cold and hot water circulation, irrigation, fluid transfer, boiler feed, car/truck wash, water reclamation, booster service and supply water. Heads to 400 ft. (175 PSI) and flows to 140 GPM.

Dual impellers are bronze construction (*Iron also available*). Pump casing is high tensile gray iron. Pump shaft is 416 stainless. Mechanical shaft seal is rated to 75 PSI inlet pressure and 220° F. Pumps are pedestal style without motors but we can supply motor, base and drive couplings if required. Drive speed is 3450 RPM. Pump shafts are 1-1/4".



**12C Series  
Two Stage  
Centrifugal Pumps**

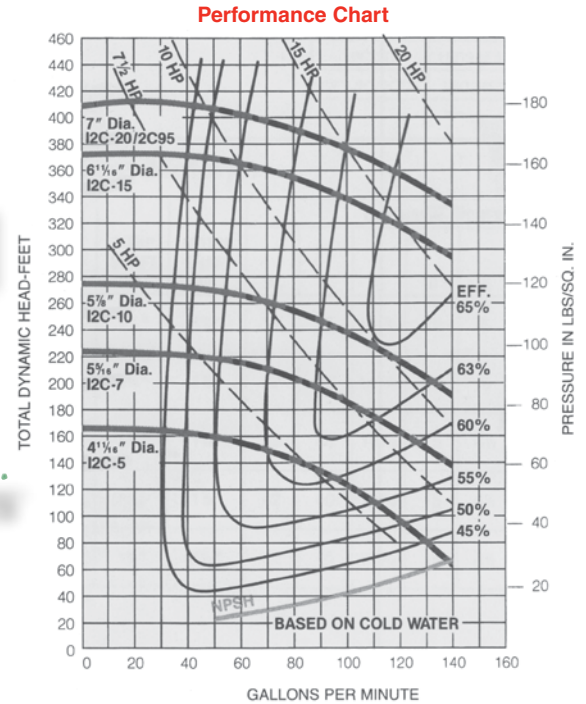


**12C Series Pumps**

Part No.	Flow Rate	Inlet	Outlet	Wt.
MY 12C-5	80 GPM @ 60 PSI	2"	1-1/2"	125 lbs.
MY 12C-7	100 GPM @ 80 PSI	2"	1-1/2"	125 lbs.
MY 12C-10	120 GPM @ 100 PSI	2"	1-1/2"	125 lbs.
MY 12C-15	140 GPM @ 130 PSI	2"	1-1/2"	125 lbs.
MY 12C-20	140 GPM @ 150 PSI	2"	1-1/2"	125 lbs.

## MYERS Straight Centrifugal Pumps

**Myers CT Series Straight Centrifugal Pumps** are an excellent choice for liquid transfer, booster service, irrigation, circulation, sprinkling systems and general industrial service. Flows to 95 GPM and pressures to 55 PSI and 140 ft.

**Features:** Heavy Duty cast iron construction • Back pull out design for easy serviceability • Double ball bearing, continuous duty motors, ODP 60hz • Corrosion-resistant composite impeller, (*Stainless also available*) • CSA listed • Single or Three phase motors • Carbon/ceramic seals • Discharge can be rotated to 4 positions • Rated to 140° F. (*Higher temperature models available*).

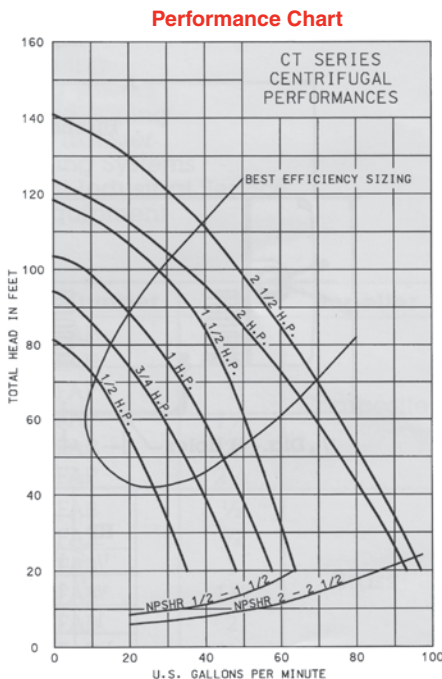

**Flows to 95 GPM  
& Pressures to  
55 PSI and 140 ft.**



**CT Series  
Straight  
Centrifugal Pumps**



**CT Series Pumps**

Part No.	HP	Phase	Voltage	Maximum Flow	IN	Out	Wt.
MY CT07	3/4	1	115/230	48 GPM	1-1/4"	1"	32 lbs.
MY CT10	1	1	115/230	57 GPM	1-1/4"	1"	35 lbs.
MY CT15	1-1/2	1	115/230	64 GPM	1-1/4"	1"	40 lbs.
MY CT20	2	1	115/230	92 GPM	1-1/2"	1-1/4"	57 lbs.
MY CTJ153	1-1/2	3	208/230/460	64 GPM	1-1/4"	1"	40 lbs.
MY CT203	2	3	208/230/460	97 GPM	1-1/2"	1-1/4"	57 lbs.