

Self-Storing Coil Hoses


POLYURETHANE



Ideal for use as air hoses. Stretch them out to use them and they self coil when you are finished. Polyurethane construction is highly kink and abrasion resistant with strength and flexibility. Superior oil resistance.

Each assembly comes standard with one swivel end and one solid end protected by bend restrictors. All hoses feature a 4" pigtail on one end and a 20" on the other. Rated to 140 psi. 1/4" hoses feature 1/4" MPT fittings. 3/8" ID hoses feature 3/8" MPT fittings. Replacement fittings are also available. Temperature Range is -68° F. to 140° F.

Part No.	Color	I.D.	Working Length	Overall Length
TF A1001B	Blue	1/4"	16'	20'
TF A1001BK	Black	1/4"	16'	20'
TF A1001C	Clear	1/4"	16'	20'
TF A1001R	Red	1/4"	16'	20'
TF A1001Y	Yellow	1/4"	16'	20'
TF A1002B	Blue	1/4"	25'	30'
TF A1002BK	Black	1/4"	25'	30'
TF A1002C	Clear	1/4"	25'	30'
TF A1002R	Red	1/4"	25'	30'
TF A1002Y	Yellow	1/4"	25'	30'
TF A1012C	Clear	1/4"	35'	40'
TF A1007B	Blue	3/8"	16'	20'
TF A1007BK	Black	3/8"	16'	20'
TF A1007C	Clear	3/8"	16'	20'
TF A1007R	Red	3/8"	16'	20'
TF A1007Y	Yellow	3/8"	16'	20'
TF A1008B	Blue	3/8"	25'	30'
TF A1008BK	Black	3/8"	25'	30'
TF A1008C	Clear	3/8"	25'	30'
TF A1008R	Red	3/8"	25'	30'
TF A1008Y	Yellow	3/8"	25'	30'
TF A1011C	Clear	3/8"	35'	-

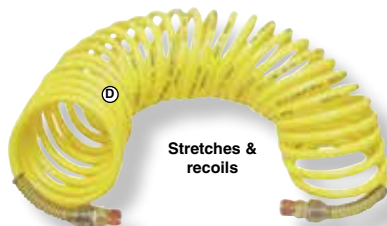

Stretches & recoils

Nylon Air Hose

ECONOMICAL
VERSATILE
LIGHTWEIGHT

"FLEXI-HOSE" for Automobile and Industrial use. Maximum working pressure up to 200 PSI. Operates all types of hand air tools efficiently and dependably. Fully equipped with spring guards, tube inserts and standard compression fittings. Retractability eliminates the danger of dragging air hose which can cause accidents. Temperature is rated to 180° F.

Part No.	Fitted	ID & MPT	Length
AM A761	Flex Hose	1/4"	12'
AM A762	Flex Hose	1/4"	25'
AM A763	Flex Hose	3/8"	12'
AM A764	Flex Hose	3/8"	25'
AM A765	Flex Hose	3/8"	50'

Pipe/Hose/Tubing Cutters

The perfect tools for cutting hose, tubing or plastic pipe. Enables you to get a smooth, straight cut every time.



SL100YT & SL200



TSNIP

SL100YT & SL200 are light weight spring action cutters with a safety latch for closing. The SL100YT cuts up to 1" O.D. and the SL200 cuts to 2" O.D.

TSNIP is an economy tubing cutter. For up to 1/2" O.D.

Part No.	Description
EV SL100YT	Orange Cutter with Blade that cuts up to 1"
EV SL200	Black Cutter with Blade that cuts up to 2"
LM TSNIP	Economy Tube Cutter.....
EV BT100	Replacement Blade for SL100YT.....
EV SSB200	Replacement Blade for SL200



Ultra Lightweight, Ultra Flexible PVC Hose

An excellent general purpose hose for water, air, lubricated air, light chemicals, anti-freeze and some acids. Standard with a blue cover.

- Exceptionally Flexible & Lightweight
- PVC Cover is Non-Marking with Excellent Abrasion & Tear-Resistance
- PVC Tube with Two-Spiral Polyester Yarn for Strength
- Highly Resistant to UV Rays & Ozone
- Non-Conductive & Flame Retardant
- Temperature Range: -15° F. to +150° F.

NOTE: CUT LENGTHS SOLD IN 5' INCREMENTS ONLY



Hose No.	I.D.	Reinf. Spirals	O.D.	Vacuum Rating	Max. PSI	Bend Radius	Wt. 100-Ft.	Reel Size
GPH-38	3/8"	2	0.64"	23	300	1"	12.3 lbs.	500'
GPH-12	1/2"	2	0.80"	17	300	1-1/2"	17.6 lbs.	500'

Part No.	Hose I.D.	Hose O.D.	Full Reel	Full Reel Discount
PA GPH-38	3/8"	0.64"	500'	25%
PA GPH-12	1/2"	0.80"	500'	25%

Sandblast Hose




T751 Heavy Duty Sandblast Hose. Sold in 25' & 50' lengths only.

Part No.	Size
TF T751-075	3/4" I.D. x 1-1/2" O.D.

Universal Air & Water Couplings

- Plated Iron -

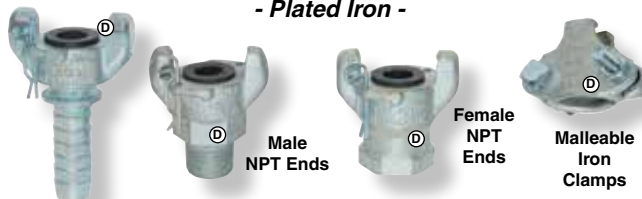

Hose Ends

COUPLINGS FOR USE UP TO 150 PSI
- Not for Use With Steam -

Part No.	Description	Size
EV AM1	Hose End	1/2"
EV AM6	Hose End	3/4"
EV AM11	Hose End	1"
EV AM2	Male NPT Ends	1/2"
EV AM7	Male NPT Ends	3/4"
EV AM12	Male NPT Ends	1"
EV AM3	Female NPT Ends	1/2"
EV AM8	Female NPT Ends	3/4"
EV AM13	Female NPT Ends	1"
EV AWR4	Washer	ALL
EV A9	Clamps 1-1/8" to 1-5/16" O.D.	
EV A10	Clamps 1-5/16" to 1-1/2" O.D.	



WASHER Same Size for all Coupling Sizes

BESTWAY SHIPPING

"BestWay" shipping may not be the quickest option, but it will help to lower your freight bill. If you select this method of shipping, Dultmeier will calculate the cheapest way to ship your package(s) at the time of shipment.

Please remember there are No Returns on customer specified cut lengths of hose.