

Washout Systems • Jetter Units

Trailer Washout Systems

Ideal for Applications that Require High Volumes of Clean Wash / Rinse Water

Pumping Systems designed for high flow rates at moderate pressures. Ideal for washout and cleaning of livestock trailers, tank trucks, delivery vehicles and any other applications that require high volumes of clean wash/rinse water.

Trailer Washout units are rated to 24 GPM and 450 PSI and have the following **Features:** Single or three phase motors with manual stop/start controls • Stainless steel baseplate and belt guard • Belt tightener • High flow pressure regulator • 7-1/2 HP Baldor motor • Double groove pulleys with cog belts • 100' of 3/4" wash hose • Adjustable pattern spray wand • Pre-plumbed and ready for hookup, (motors and starters must be wired to your power source).

Systems can be direct fed or water can be supplied from an optional supply tank. (Various hose reels, supply tanks and catch basins are available, but not included).




Part No.	Motor	GPM	PSI	Wt. Lbs.
DU TWO251	7.5 HP / 1 Phase	24	450	225
DU TWO253	7.5 HP / 3 Phase	24	450	210

BESTWAY SHIPPING

"BestWay" shipping may not be the quickest option, but it will help to lower your freight bill. If you select this method of shipping, Dultmeier will calculate the cheapest way to ship your package(s) at the time of shipment.

Water Jetter Units

Drain Cleaner Jetting Units from Dultmeier Sales! Electric motor driven pumps mounted on compact hand carry frames. These units are built with a Jetter Valve that creates a "pulsing flow" to dislodge blockages in drains, plumbing lines or pipes. Available in 15 amp or 20 amp ratings.

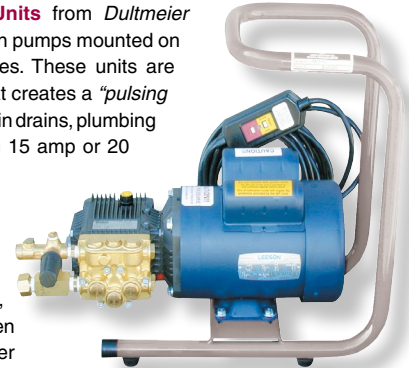

Units include pump, motor, aluminum frame, pressure gauge, jetter valve, balanced relief valve, on/off pressure valve, garden hose inlet fitting, 50' jetter with nozzle and 25' GFI power cord.

Part No.	GPM	PSI	Motor	Wt. Lbs.
DU JT50	2.1	1000	1.5 HP/1 PH/13 Amp	65
DU JT100	2.8	1000	2 HP/1 PH/20 Amp	70
DU JT150	2.1	1500	2 HP/1 PH/22 Amp	70

3 & 5 HP Pressure Wash Units

Designed with Upstream Soap Injectors for High Pressure Soap Injection


Versatile, High Pressure Wash Units. Ideal for a wide variety of cleaning requirements. Features Ceramic Plunger Pumps and 3 or 5 HP TEFC motors. **Close-coupled feature eliminates** the need for belts or pulleys and provides for smooth, quiet operation.

3-HP Units are rated to 3.6 GPM @ 1200 PSI. Available with either Cat Pumps® Plunger pumps. Wash units are complete as shown and include a manual chemical injector and rinse/soap valve for accurate injection of detergents into the system.

5-HP Units are rated to 4 GPM @ 1800 PSI. Available with either Cat Pumps® Plunger pumps. Wash units are complete as shown and include a chemical injector and rinse/soap valve for accurate injection of detergents into the system.

Standard with pressure unloader valve, trigger style shut-off gun, insulated extension, 50' of 3/8" high pressure hose, gun swivel, pressure pop-off valve, pressure gauge and spray nozzle.

All units are pre-assembled on heavy gauge stainless steel base plates and are tested prior to shipping.

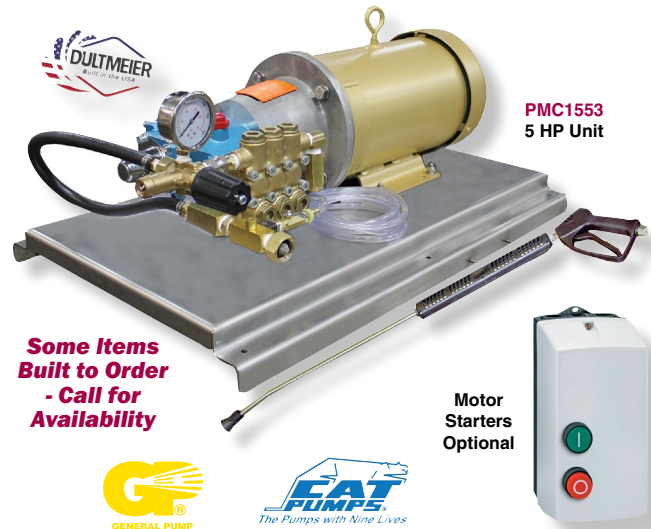

Some Items Built to Order - Call for Availability

Motor Starters Optional

Part No.	HP	Phase	Volts	Pump	PSI	GPM	Wt. Lbs.
DU PM1301C	3	Single	115/230	Cat	1200	3.6	100 lbs.
DU PM1303C	3	Three	230/460	Cat	1200	3.6	90 lbs.
DU PMC1551	5	Single	230	Cat	1800	4.0	160 lbs.
DU PMC1553	5	Three	230/460	Cat	1800	4.0	135 lbs.
CE M1P018-C-B0S				Motor Starter, 3 HP - 1 Phase, 230 Volt			
CE M2P032-C-B3S				Motor Starter, 5 HP - 1 Phase, 230 Volt			
CE M1P009-C-A9				Motor Starter, 3 HP - 3 Phase, 230 Volt			
CE M1P018-C-B0				Motor Starter, 5 HP - 3 Phase, 230 Volt			