

Micro Matic Pro-Blend

Micro Matic Pro-Blend is a unique air-driven system that mates to a *Micro Matic* Fill Coupler and is used to agitate or mix solutions. You are going to be amazed at what this system will be able to put back into suspension and turn a mucky viscous mess – back into a product that can be pumped.

Micro Matic customers have used this system to mix products as viscous as resins in some applications. As always, confirm what air mixing will do to your solution prior to use. Should you have questions feel free to call us to discuss.


This system requires that you have a 3-way RSV/RPV Drum Valve installed in your tote or drum. Size your down tube mixer for the specified vessel size. Air supply pressure is not to exceed 125 PSI. Air inlet is quick-connect 1/4" male adapter. Pro-Blend mixers come assembled with 3-Key, Viton®, 304SS Fill Coupler and air pressure regulator.



No. 7340 Air Consumption is 1-2 CFM at 40-60 PSI




No. 7339 Air Consumption is 3-4 CFM at 45-95 PSI

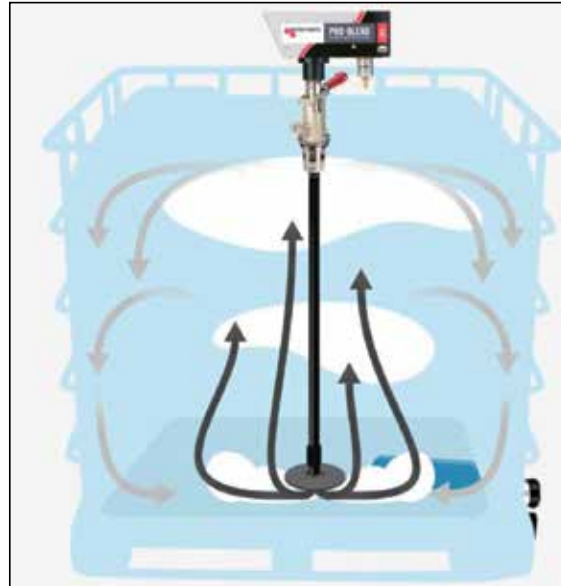

Part No.	Description
PJ 7340	Pro-Blend for Drums, 15 Gallon to 55 Gallon, Includes RSV Fill Coupler, Viton®
PJ 7339	Pro-Blend for Totes, 275 Gallon to 330 Gallon, Includes RSV Fill Coupler, Viton®
PJ 7488-810	Down Tube, 55 Gallon Drum with 2" Mix Plate, 32" x 1", Use with PJ7340.....
PJ 10918-960	Down Tube, 275 Gallon Tote with 5" Mix Plate, 38" x 1", Use with PJ7339.....
PJ 10918-1135	Down Tube, 330 Gallon Tote with 5" Mix Plate, 45" x 1", Use with PJ7339.....
PJ 8564	Rinse Socket for Pro-Blend.....

* Additional Sizes Available for Special Order - Call with Specifications.

Micro Matic Accessories

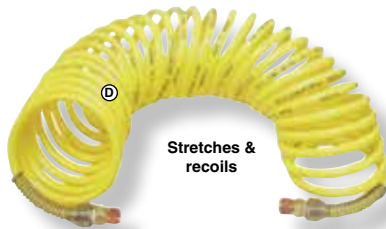

Stretches & recoils

Nylon Air Hose

ECONOMICAL
VERSATILE
LIGHTWEIGHT

"FLEXI-HOSE" for Automobile and Industrial use. Maximum working pressure up to 200 PSI. Operates all types of hand air tools efficiently and dependably. Fully equipped with spring guards, tube inserts and standard compression fittings. Retractability eliminates the danger of dragging air hose which can cause accidents. Temperature is 180° F.

Part No.	Fitted	ID & MPT	Length
AM A761	Flex Hose	1/4"	12'
AM A762	Flex Hose	1/4"	25'
AM A763	Flex Hose	3/8"	12'
AM A764	Flex Hose	3/8"	25'
AM A765	Flex Hose	3/8"	50'


Quick-Connect Air Line Fittings

EATON/HANSEN Quick-Connect Couplings provide the fastest, easiest, and most reliable means of joining air lines and tools. Automatic coupling, easy disconnect and positive air shut-off. Coupling bodies are brass, Plugs are plated steel. All fittings are of the popular "Industrial Interchange" design. Rated to 150 PSI.

Part No.	Description
EV DCB20	1/4" FPT Female Coupler
EV DCB26	3/8" FPT Female Coupler
EV DCB10	1/2" FPT Female Coupler
EV DCP20	1/4" FPT Female Plug.....
EV DCP26	3/8" FPT Female Plug
EV DCP18	1/2" FPT Female Plug.....
EV DCP21	1/4" MPT Male Plug
EV DCP25	3/8" MPT Male Plug
EV DCP17	1/2" MPT Male Plug



FPT Coupler



FPT Plugs



MPT Plugs

Viton® is a registered trademark of DuPont Performance Elastomers