
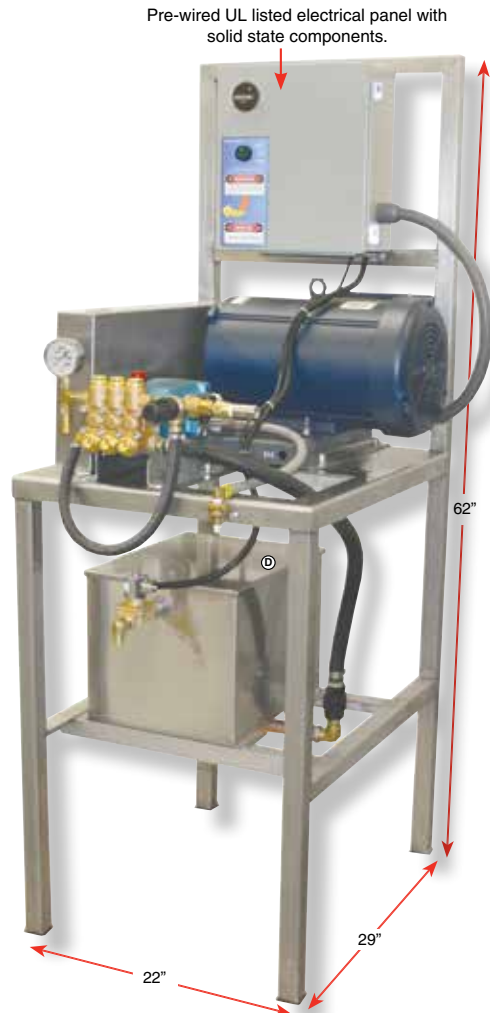


# High Pressure Wash Stations for Car Wash • Plant Washdown • Industrial Cleaning

## Single & Double Rack Systems

All the features you want, in an Easy-to-Service, High Pressure Wash Station!

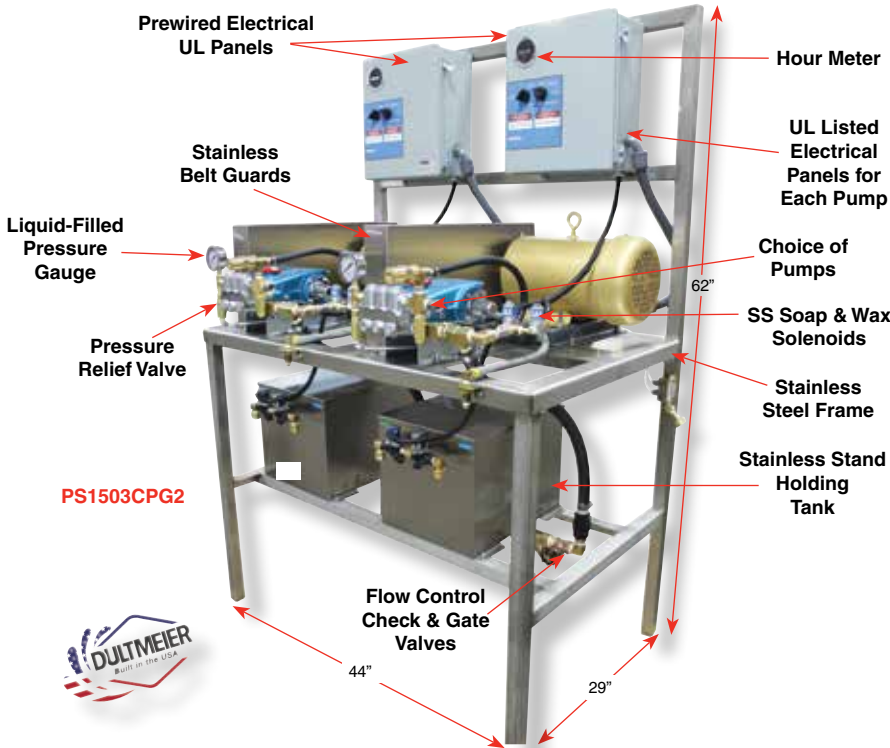

### STATION FEATURES

- **PUMPS:** Pulley-drive CAT Plunger Pumps are standard. (*HYPRO • GENERAL • AR • GIANT* are also available).
- **ELECTRICAL PANELS:** High quality, solid state controls for long trouble-free service. (UL Listed).
- **STAINLESS STEEL SUPPLY TANKS.**
- **MOTOR:** 5 HP, 230 Volt, Baldor TEFC, Single or Three phase. (*208/460 Volt* also available).
- **SOLENOID VALVES:** Stainless Steel solenoid valves for both soap and wax lines. Double inlet design for hot and cold water inlets.
- **GRAVITY-FEED SYSTEMS** feature a stainless holding tanks with float valves for uninterrupted water supply.
- **PRESSURE GAUGES:** Stainless case, Glycerin-filled gauges for accurate readings of output pressure.
- **HOUR METER:** Ideally suited for indication of pump system running time for maintenance and service requirements.
- **BALANCED PRESSURE RELIEF VALVE:** Allows for the use of trigger guns as well as protecting the system against damage from excessive pressures.
- **STAINLESS STEEL FRAME:** Constructed with adjustable isolators on each leg.
- **DIMENSIONS: BENCH MODELS:** Bench Height is 34". Overall height is 62". Depth is 29". Width on single bay is 22". Double bay width is 44".



Part No.	Pumps	Motors	Flow/PSI	Wt./Lbs.
DU PS1501C-PG	(1) Cat 310B	5 HP / 1 PH	3.6 @ 1400	400
DU PS1503C-PG	(1) Cat 310B	5 HP / 3 PH	3.6 @ 1400	400
DU PS1501CPG2	(2) Cat 310B	5 HP / 1 PH	3.6 @ 1400	675
DU PS1503CPG2	(2) Cat 310B	5 HP / 3 PH	3.6 @ 1400	675