


Low Pressure Trigger Valves

Trigger Wand Valves are ideal for use with auto detailer products, bug spray applicators, tire or presoak solutions, window cleaning products and more. Rated to 250 PSI. Brass or stainless bodies. Buna or Viton® seals. Quick acting on/off control. Rated to 2 GPM and 140 PSI. Handle with finger loop. Inlet is 1/4" FPT on all models except **6466-4727** which is 1/4" MPT. Discharge ports are either 1/4" FPT for standard male nozzles or cap thread outlet for **5500 Series** adjustable spray nozzles.

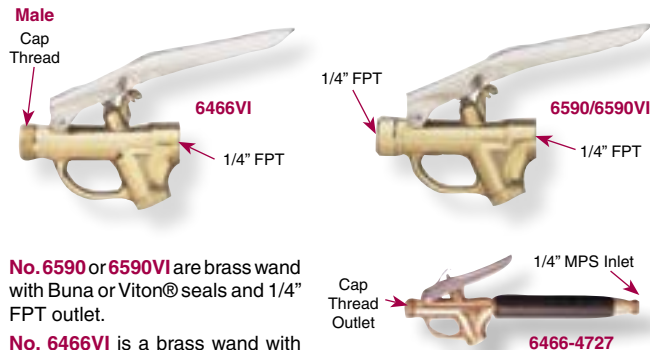

No. **6590** or **6590VI** are brass wand with Buna or Viton® seals and 1/4" FPT outlet.

No. **6466VI** is a brass wand with Viton® seals and cap thread outlet for **5500 Series** adjustable nozzles (shown below).

No. **6466-4727** is a brass wand with Buna seals, rubber handle grip with 1/4" MPS and cap thread outlet for **5500 Series** adjustable nozzles.

Part No.	Wand Type	Outlet
SS 6590	Brass with Buna Seal	1/4" FPT
SS 6590VI	Brass with Viton® Seal	1/4" FPT
SS 6466VI	Brass with Viton® Seal	Cap Thread
SS 6466-4727	Trigger Valve with Grip,	Cap Thread

Brass & Polypropylene Adjustable Spray Tips



5500 Adjustable Spray Tips have TeeJet Cap threads to fit any Gunjet; however, it is primarily used with Drip-free guns for spot spraying. Body rotates for spray selection from wide angle cone to straight stream. Maximum throw at 30 PSI is 30 feet. Brass or polypropylene. Tip settings "A" and "B" on chart below represent two extreme points of rotation in tip adjustment.

Adjustable ConeJet Tip Number	Performance	Liquid Pressure in PSI									
		20 PSI		30 PSI		40 PSI		60 PSI		100 PSI	
		Setting	Setting	Setting	Setting	Setting	Setting	Setting	Setting	Setting	Setting
5500X1	Capacity-GPM	-	.049	.015	.061	.017	.07	.02	.086	.025	.11
5500X2		.025	.091	.03	.11	.033	.13	.04	.16	.05	.20
5500X3		.037	.13	.045	.17	.05	.19	.058	.23	.073	.30
5500PPB-X3		.05	.18	.058	.22	.067	.25	.08	.31	.10	.40
5500X4		.061	.21	.076	.26	.082	.30	.10	.37	.13	.48
5500X5		.073	.26	.087	.32	.10	.37	.12	.45	.15	.58
5500PPB-X5		.097	.33	.12	.40	.13	.47	.16	.57	.21	.74
5500X6		.12	.42	.15	.52	.17	.60	.21	.73	.26	.94
5500PPB-X6		.15	.49	.18	.60	.20	.69	.24	.84	.31	1.1
5500X8		.17	.55	.20	.67	.23	.78	.29	.95	.37	1.2
5500PPB-X8	Capacity-GPM	.21	.69	.26	.84	.30	.97	.37	1.2	.47	1.5
5500X10		.26	.83	.32	1.0	.37	1.2	.45	1.4	.58	1.9
5500X12		.31	.98	.37	1.2	.43	1.4	.53	1.7	.68	2.2
5500PPB-X12											
5500X14											
5500X18											
5500PPB-X18											
5500X22											
5500X26											

Part No.	Description
SS 5500X3 thru X26	Brass Adjustable Nozzle
SS 5500PPB-X3 thru X18	Poly Adjustable Nozzle

Viton® is a registered trademark of DuPont Performance Elastomers

Medium Pressure Trigger Valves



Model 31F Trigger Operated Wand Valve can be used for a wide variety of liquid or air applications. Drip-free shut off. Brass body with Buna seal, (stainless or Viton® available). Rated to 5 GPM, 500 PSI and 200° F. Standard with cap thread outlet and cap for flat back spray nozzles. Inlet is 1/4" FPT.

Part No.	Wand Type	Outlet
SS 31F	Brass with Buna Seal	Cap Thread

Trigger Hand Operated Spray Guns



Polypropylene Wands with or without Polypropylene Extensions can be used with bug spray, tire cleaner and presoak solutions. Designed for ease and comfort in operation. Trigger lock permits locking of valve in open position for continuous flow of liquid. Maximum pressure is 150 PSI. Viton® diaphragm. 1/4" FPT or 3/8" HB inlet connection. Extensions included on 15" & 24" units.

Part No.	Description
SS 22650-1/4PP	Spray Gun Only, 1/4" FPT
SS 22650PP	Spray Gun Only, 3/8" HB
SS 22670PP1/4-15	15" Spray Gun, 1/4" FPT & #8 Nozzle
SS 22670PP	15" Spray Gun, 3/8" HB & #8 Nozzle
SS 22670PP-24406	24" Spray Gun, 3/8" HB & #8 Nozzle
SS PKAB22670PP	Repair Kit for Spray Gun
SS 22665-15PP	Extension Less Nozzle & Adapter
SS 22665-24PP	Extension Less Nozzle & Adapter
SS CP22664PP	Straight Adapter
SS CP22673PP	45° Adapter
SS 38720-PPBX8	* 45° Adjustable ConeJet Assembly

* Also available in X12 & X18. † Extensions included on these models

Lightweight Spray Guns



Lightweight Polypropylene Gun for use with back pack and other low pressure sprayers. Available with a 15" polypropylene or 21" aluminum extension. 1/4" or 3/8" Hose barb inlet connection. Trigger lock and internal strainer. 100 psi maximum pressure. Threaded outlet for use with any standard TeeJet tip but comes standard with an adjustable conejet tip as noted.

Part No.	Description
SS 50800-PP-1/4	Trigger Gun, No Nozzle, No Ext., 1/4" FPT
SS 50800-14PPX8	Spray Gun, 1/4" HB with 15" Polypropylene Extension & #8 Nozzle
SS 50800-38ALX12	Spray Gun, 3/8" HB with 21" Aluminum Extension & #12 Nozzle
SS 50800-38PPX12	Spray Gun, 3/8" HB with 15" Polypropylene Extension & #12 Nozzle
SS 38720-PPBX8	* Adjustable ConeJet Nozzle

* X8, X12, X18 & X26 As Replacements.



Washdown Gun/Lance Assembly



General Pump Washdown Gun/Lance Assembly. Includes 34" Lance and ergonomically designed Washdown Gun. Constructed internally of brass and stainless steel. Features a shock resistant plastic housing with stainless steel seat and ball. Buna-N and Teflon seals. Excellent for high pressure plant washdowns, fleet cleaning, hydro excavation, and more.



Part No.	Orifice Size	Inlet	Max Flow	Max PSI	Max Temp	Wt.
IP YG26LA34	#25 (3.0 mm)	1/2" NPT-F	21.0 GPM	2,600	109° F	7.0 lbs