

# Blue Clean Pro Pressure Washers

(Industrial Professional Line)




**Blue Clean Pro Series Pressure Washers** from AR North America. Electric pump/motor units built for commercial, continuous-duty applications. Compact, portable and easily moved as needed. All models feature Triplex Plunger Pumps with ceramic pistons, brass pump heads and double pack industrial seals.

Available in hand carry or wheeled cart versions. Also available with Manual stop/start switch or with auto stop/start feature that turns units on or off via the trigger wand. All motors are 2 HP, single phase, 120volt, 60Hz. Amp ratings are 15 or 20amp as shown.

*(Note: Water temp rating of 120° F. or 180° F. is the maximum temperature that can be "supplied" to a machine as shown. These washers can transfer but do not create hot water).*

All models include pump, motor, trigger wand with extension and adjustable spray nozzle, 25' pressure hose, 20' GFCI power cord, chemical injector, adjustable pressure valve, pressure gauge, Garden hose inlet fitting.

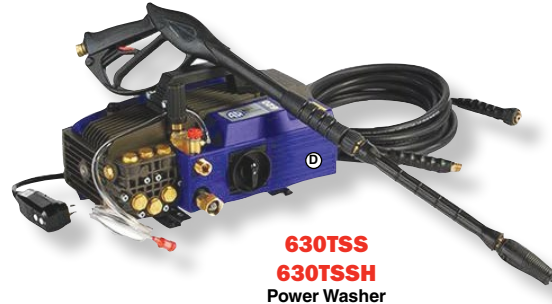

**630TSS  
630TSSH**  
Power Washer



**767**  
Wheeled Cart Model



**675K**  
Pressure Washer With Cart



detergent suction system



pressure gauge and regulation knob



brass head pump with pump oil discharge valve



**675**  
Hand Carry



ergonomic handle



built-in cord holder



rotary switch



inspectable water intake filter with GHA



**630H / 630TSSH**  
Hand Carry, Hot Models

<b>Hand Carry Models with Manual On/Off Switch</b>						
Part No.	Rated Flow	Max. Flow	Rated PSI	Max. PSI	Water Temp.	Amp Draw
AR 630H	1.9 GPM	2.1 GPM	1400	1900	180° F.	20

<b>Hand Carry Models with Auto On/Off Switch</b>						
Part No.	Rated Flow	Max. Flow	Rated PSI	Max. PSI	Water Temp.	Amp Draw
AR 675	1.5 GPM	1.7 GPM	1450	2000	120° F.	15
AR 630TSS	1.9 GPM	2.1 GPM	1400	1900	120° F.	20
AR 630TSSH	1.9 GPM	2.1 GPM	1400	1900	180° F.	20

<b>Wheeled Cart Models with Auto On/Off Switch</b>						
Part No.	Rated Flow	Max. Flow	Rated PSI	Max. PSI	Water Temp.	Amp Draw
AR 675K	*1.5 GPM	1.7 GPM	1450	2000	120° F.	15
AR 767	**1.9 GPM	2.1 GPM	1400	1900	120° F.	20

\* Includes Chemical Injector, But NO Tank.  
\*\* Includes Chemical Injector & 68oz. Chemical Solution Tank.