



## wilo® Industrial Wet Rotor Circulators




The **Wilo Top S Circulator** has a wide range of applications such as hot water systems, closed circuit cooling systems, air conditioning systems, industrial circulation, water/glycol concentrations up to 50% and solar/geothermal.

**Features:**

- No mechanical seal, less maintenance, quiet, and low maintenance wet rotor circulator
- Two speed operation on all voltages
- Powerful starting torque and automatically vented
- Sturdy cast aluminum electrical box

**Technical Data:**

- Maximum Temperature Range: 14°F. to 248°F.
- Ambient Temperature Range: 32° F. to 104° F.
- Maximum Working Pressure: 145 PSI

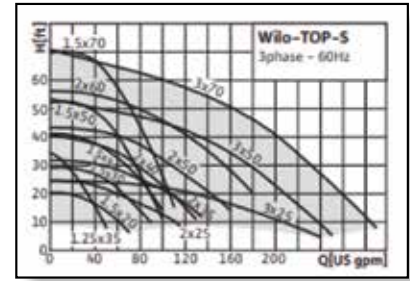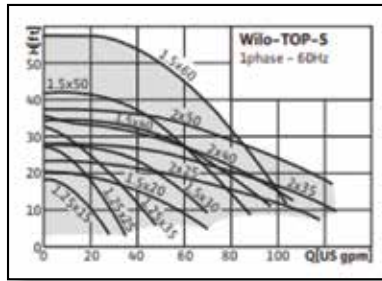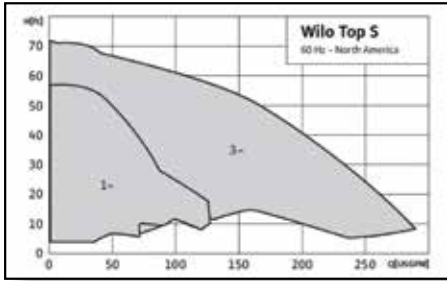

**Single Phase Circulators**

| Part No.   | Description                                     | HP    | Power     | Wt.     |
|------------|---|-------|-----------|---------|
| WO 2067540 | 1-1/4" Two-Bolt HV Flange, Two Speed, 1.25 X 15 | 1/8   | 1PH, 115V | 14 lbs. |
| WO 2067541 | 1-1/4" Two-Bolt HV Flange, Two Speed, 1.25 X 15 | 1/8   | 1PH, 230V | 14 lbs. |
| WO 2067542 | 1-1/4" Two-Bolt HV Flange, Two Speed, 1.25 x 25 | 1/8   | 1PH, 115V | 14 lbs. |
| WO 2067543 | 1-1/4" Two-Bolt HV Flange, Two Speed, 1.25 x 25 | 1/8   | 1PH, 230V | 14 lbs. |
| WO 2067544 | 1-1/4" Two-Bolt HV Flange, Two Speed, 1.25 x 35 | 1/4   | 1PH, 115V | 19 lbs. |
| WO 2067545 | 1-1/4" Two-Bolt HV Flange, Two Speed, 1.25 x 35 | 1/4   | 1PH, 230V | 19 lbs. |
| WO 2067547 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 20  | 1/4   | 1PH, 115V | 21 lbs. |
| WO 2067548 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 20  | 1/4   | 1PH, 230V | 21 lbs. |
| WO 2067550 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 30  | 1/2   | 1PH, 115V | 30 lbs. |
| WO 2067551 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 30  | 1/2   | 1PH, 230V | 30 lbs. |
| WO 2067555 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 40  | 1/4   | 1PH, 115V | 30 lbs. |
| WO 2067556 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 40  | 1/4   | 1PH, 230V | 30 lbs. |
| WO 2067560 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 50  | 3/4   | 1PH, 115V | 41 lbs. |
| WO 2067561 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 50  | 3/4   | 1PH, 230V | 41 lbs. |
| WO 2067565 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 60  | 1-1/4 | 1PH, 230V | 46 lbs. |
| WO 2067569 | 2" Four-Bolt HV Flange, Two Speed, 2 x 25       | 1/2   | 1PH, 115V | 34 lbs. |
| WO 2067570 | 2" Four-Bolt HV Flange, Two Speed, 2 x 25       | 1/2   | 1PH, 230V | 34 lbs. |
| WO 2067574 | 2" Four-Bolt HV Flange, Two Speed, 2 x 35       | 3/4   | 1PH, 115V | 34 lbs. |
| WO 2067575 | 2" Four-Bolt HV Flange, Two Speed, 2 x 35       | 3/4   | 1PH, 230V | 34 lbs. |
| WO 2067579 | 2" Four-Bolt HV Flange, Two Speed, 2 x 40       | 3/4   | 1PH, 115V | 43 lbs. |
| WO 2067580 | 2" Four-Bolt HV Flange, Two Speed, 2 x 40       | 3/4   | 1PH, 230V | 43 lbs. |
| WO 2067584 | 2" Four-Bolt HV Flange, Two Speed, 2 x 50       | 1-1/2 | 1PH, 230V | 51 lbs. |

\* All Flanges Sold Separately.

**5% Discount on 3+ Pumps of One Size**

**Three Phase Circulators**

| Part No.   | Description                                     | HP    | Power         | Wt.     |
|------------|---|-------|---------------|---------|
| WO 2067546 | 1-1/4" Two-Bolt HV Flange, Two Speed, 1.25 x 35 | 1/4   | 3PH, 208/230V | 14 lbs. |
| WO 2067549 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 20  | 1/4   | 3PH, 208/230V | 20 lbs. |
| WO 2067552 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 30  | 1/4   | 3PH, 208/230V | 27 lbs. |
| WO 2067557 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 40  | 1/2   | 3PH, 208/230V | 29 lbs. |
| WO 2067562 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 50  | 3/4   | 3PH, 208/230V | 40 lbs. |
| WO 2067566 | 1-1/2" Two-Bolt HV Flange, Two Speed, 1.5 x 70  | 1-1/2 | 3PH, 208/230V | 45 lbs. |
| WO 2067571 | 2" Four-Bolt HV Flange, Two Speed, 2 x 25       | 1/2   | 3PH, 208/230V | 32 lbs. |
| WO 2067576 | 2" Four-Bolt HV Flange, Two Speed, 2 x 35       | 3/4   | 3PH, 208/230V | 34 lbs. |
| WO 2067581 | 2" Four-Bolt HV Flange, Two Speed, 2 x 40       | 3/4   | 3PH, 208/230V | 43 lbs. |
| WO 2067585 | 2" Four-Bolt HV Flange, Two Speed, 2 x 50       | 1-1/2 | 3PH, 208/230V | 50 lbs. |
| WO 2067588 | 2" Four-Bolt HV Flange, Two Speed, 2 x 60       | 1-3/4 | 3PH, 208/230V | 56 lbs. |
| WO 2067591 | 3" ANSI Flange, Two Speed, 3 x 25               | 3/4   | 3PH, 208/230V | 60 lbs. |
| WO 2067594 | 3" ANSI Flange, Two Speed, 3 x 50               | 2     | 3PH, 208/230V | 92 lbs. |
| WO 2067597 | 3" ANSI Flange, Two Speed, 3 x 70               | 2     | 3PH, 208/230V | 9 lbs.  |

\* All Flanges Sold Separately. \*\* Most Models Available in 460V - Call for Pricing & Availability.

**5% Discount on 3+ Pumps of One Size**

**Flange Kits**

| Part No.   | Description  |
|------------|--|
| WO 2705104 | 1-1/4" HV Cast Iron Flange Kit – (2) Flanges, (4) Nuts, (4) Bolts, (2) Gaskets |
| WO 2705026 | 1-1/2" HV Cast Iron Flange Kit – (2) Flanges, (4) Nuts, (4) Bolts, (2) Gaskets |
| WO 2705027 | 2" HV Cast Iron Flange Kit – (2) Flanges, (8) Nuts, (8) Bolts, (2) Gaskets     |