



Tankless Water Heaters


Tankless, On-Demand, Gas Water Heaters from **Rheem**. Super high efficiency, condensing models are designed to fire only when flow is required. No storage tanks or transfer pumps mean savings on space and energy costs. Variable temperature output based on flow rates.

Standard Features:

- 2 inch direct air supply and discharge vents for Sch40 PVC, CPVC or Poly pipe
- Energy savings as high as 30% vs conventional tank type heaters.
- Units are factory set for natural gas but LP gas conversion kits are included
- Only 4 moving parts—fan, mixing valve, gas valve, damper
- Single pass heat exchanger with copper waterway for maximum heat transfer and minimal heat loss
- Illuminated touchscreen control panel
- Stands up to extreme hard water applications
- Compact size for easy mounting and space savings
- For indoor use only

Specifications:

- Rated from 105° F to 149° F output, (varies by flow rate and input water temperature).
- Flow range is .5 to 10 GPM.
- Gas rating is 28,500 to 199,000 Btu input
- Ultra Low NOx. Meets 14ng/J NOx requirements, SCAQMD Rule 1146.2 compliant
- Water inlet, outlet and gas connections are 3/4" MPT
- Height including vent ports. 32-3/4", width 17-1/2", depth 10-3/4"
- Weight is 68 lbs.
- 120Volt, 60Hz
- Rated from 40-150 PSI incoming water pressure
- Max altitude 10,100ft natural gas, 7,800ft LP gas
- 5-year warranty for commercial applications
- Condensate neutralizer kit available if needed**

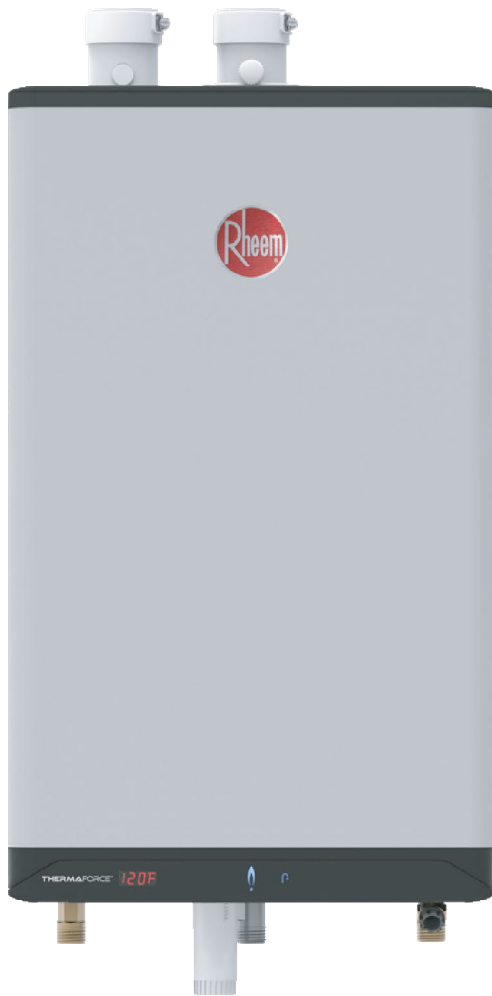

RTGH-L199i

Indoor Direct Vent
28,500-199,000 BTU/h
Natural Gas/LP Convertible



2" Inlet & Exhaust with Band Connections
Combustion Air Intake

Commercial Project Sizing Available

Illuminated Touchscreen Control Panel

3/4" Domestic Water Connections

Innovative Labyrinth Heat Exchanger with Copper Waterways

Damper


Burner Fan

Field Convertible Gas Valve

Bypass Valve

3/4" Gas Line Connection

Condensate Trap

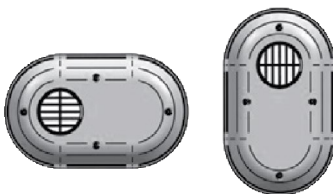

SIDE WALL VENT KITS

	Temperature Rise (°F)								
Model Number	35°	45°	50°	60°	65°	70°	80°	90°	100°
RTGH-L199i Water Flow (GPM)	10.2	8.0	7.2	6.0	5.5	5.1	4.5	4.0	3.6

Above estimates are for sizing purposes only.

Part No.	Gas	Flow Rate @ 80 Temp. Rise	Wt.
HU RTGH-L199i	Natural	5.1 GPM	68 lbs.
HU SP21069G	2" Sidewall Vent Kit	-	1 lb.
HU SP21069E	3" Sidewall Vent Kit	-	1 lb.
HU CN2-220	**Condensate Neutralizer	-	2 lbs.

*LP field convertible kit included with all heaters
**Condensate Neutralizer Kit may be required by city code, may be supplied by others