

 SUTTNER KEW Couplers

KEW Couplers from Suttner make it easy to quick connect pressure washer lances and other compatible accessories to any 1/4" spray wand. Simply thread your 1/4" MPT lance onto the 1/4" FPT KEW plug, connect the plug into the KEW Coupler and attach to your 1/4" spray wand. 14mm Allen Wrench required for KEW Coupler installation or removal.

Made from durable brass or stainless steel with a thick plastic outer shell for longevity. Superior O-ring seal minimizes pressure leaks. Rated to 300° F Max Temp.

1/4" MPT KEW plugs also available for connecting 1/4" FPT Foamers and similar attachments. *KEW plugs sold separately.*



Part No.	Material	Max. PSI
NP 202300350	Brass	5000
NP 202700350	Stainless Steel	6000

Part No.	
NP 000000015	Allen Wrench 14mm
NP 040001255	KEW Style Plug, Female
NP 040001258	KEW Style Plug, Male

Quick Couplers -Straight-Through Style-

Straight-Through "Quick-Detach" Couplers and Plugs are an excellent choice for applications requiring frequent connection and disconnection of high-pressure lines. Ideal for quick connect nozzles and spray guns. Also used with liquids, hydraulic service, compressed air, gases, water and vacuum. Straight-through design means there is no positive shut-off after disconnect.

303 stainless steel construction. Standard with Viton® O-rings. Available with male MPT or female FPT threads.



Coupler Sockets

Part No.	Size	Max. PSI
NP LL2S15-F	1/4" MPT	6700
NP LL2S16-F	1/4" FPT	6700
NP LL3S20-F	3/8" MPT	5500
NP LL3S21-F	3/8" FPT	5500
NP LL4S25-F	1/2" FPT	3000

Coupler Plugs

Part No.	Size	Max. PSI
NP LL2T15-F	1/4" MPT	6700
NP LL2T16-F	1/4" FPT	6700
NP LL3T20-F	3/8" MPT	5500
NP LL4T20-F	3/8" FPT	5500
NP LL4T25-F	1/2" MPT	3000
NP LL4T26-F	1/2" FPT	3000

MultiSocket Universal Quick-Disconnect


Anyone that has ever run maintenance in a plant knows there are several different air connector styles on the market – multiple quick-disconnect plug manufacturers means each plug needs the correct style of mating coupler. The MultiSocket product line from Aignep allows end users to mate three different styles of plugs with one universal quick-disconnect coupler. This product line accommodates Industrial, ARO, and Tru-Flare style connectors. MultiSocket connectors are designed for air applications and used in a variety of industries including: food/beverage processing, packaging, printing, pulp/paper & building materials, injection/blow molding, robotics/tooling, agriculture, and durable goods production.

Materials:

- Body: Nickel Plated Brass (Stainless Steel Available)
- 420 Stainless Steel Ball
- NBR O-rings/Seals (FKM Available)
- 302 Stainless Steel Springs

Technical Specs:

- Pressure Rating: 0-232PSI
- NPT Threads
- Temp Rating: -4 to 176°F
- REACH Certification (1907/2006)
- RoHS Certification (2011/65/CE)
- PED Certification (2014/68/UE)
- Silicon Free

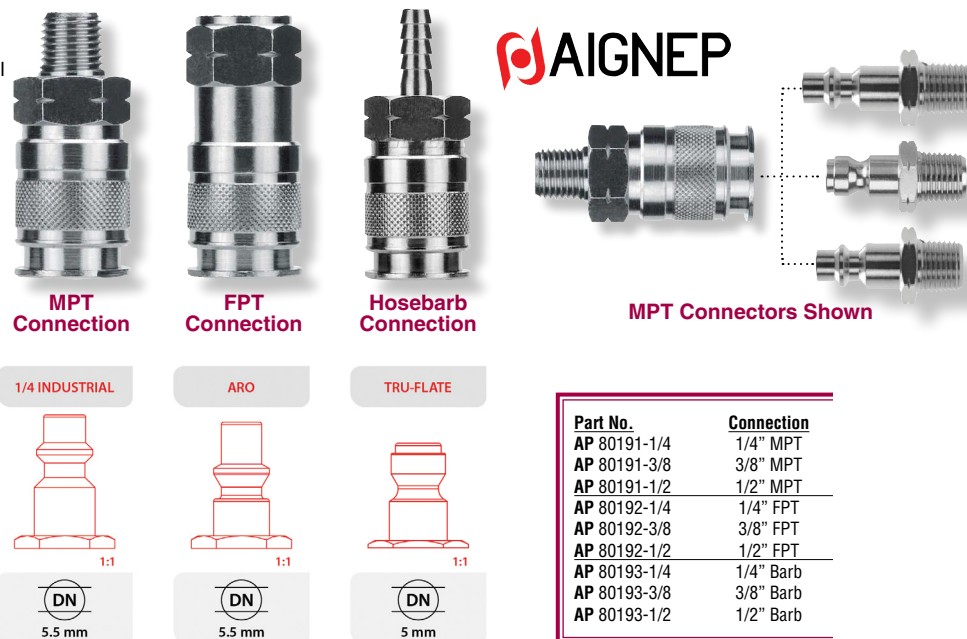

Viton® is a registered trademark of DuPont Performance Elastomers