

Cush-A-Claw™ Clamping System

The **Cush-A-Claw Clamps** are designed to grab and hold pipe, tube, conduit or hose securely in place. Patented design allows for quick, simple and easy installation. TPE materials will not rust. Non-conducting. Rated from -50° to +275° F. Can be used for indoor or outdoor applications. 75 lb. load limit, (Safety factor 3).

75 lbs. Load
(safety Factor 3)



Available in Two Styles:

Strut Mount, twist and lock clamps are for use with steel or stainless channel.

Surface Mount clamps have a counter-sunk center hole for #10 screw mounting to any flat surface.



Strut Mount Cush-A-Claw		
Part No.	Hose/Pipe/Tubing O.D. Size	** Std. Pkg.
ZS CL4	1/4"	50
ZS CL6	3/8"	50
ZS CL8	1/2"	50
ZS CL10	5/8"	25
ZS CL12	3/4"	25
ZS CL14	7/8"	25
ZS CL18	1-1/8"	20

EMT Conduit		
Part No.	Hose/Pipe/Tubing O.D. Size	** Std. Pkg.
ZS EMT12	1/2"	25
ZS EMT34	3/4"	25
ZS EMT1	1"	20

**** 10% Discount for Std Pkg. Purchase.**

Surface Mount Cush-A-Claw		
Part No.	Hose/Pipe/Tubing O.D. Size	** Std. Pkg.
ZS CLS4	1/4"	50
ZS CLS6	3/8"	50
ZS CLS8	1/2"	50
ZS CLS10	5/8"	25
ZS CLS12	3/4"	25
ZS CLS14	7/8"	25
ZS CLS18	1-1/8"	20

EMT Conduit		
Part No.	Hose/Pipe/Tubing O.D. Size	** Std. Pkg.
ZS EMTS12	1/2"	25
ZS EMTS34	3/4"	25
ZS EMTS1	1"	20

**** 10% Discount for Std Pkg. Purchase.**

Stainless Steel Coil Tubing

- 304SS & 316SS -

Stainless Steel Tubing for liquid or air supply lines. Ideal for use with low or high pressure solutions such as oils, chemicals, gases and solvents. Can also be used for low pressure chemical transfer, gas lines, air lines and more. Can be used with a wide variety of compression and push-lock fittings depending on application.



Standard .035 wall thickness in **304SS Welded** or **316SS Seamless** continuous coils. Rated to working pressures as shown.* (Shown and priced in 150' coils, but 300', 500' and 1000' coils are also available).

Part No.	Type	O.D. Size	Max. Length	PSI
MA TWC250-150	304SS Welded.....	1/4"	150'	4100
MA TWC375-150	304SS Welded.....	3/8"	150'	2650
MA TWC500-150	304SS Welded.....	1/2"	150'	2100
MA TSC250-150	316SS Seamless....	1/4"	150'	5100
MA TSC375-150	316SS Seamless....	3/8"	150'	3300
MA TSC500-150	316SS Seamless....	1/2"	150'	2600

CALL for CURRENT PRICING

* 300', 500' and 1000' Coils Available in Most Sizes.




Beta Clamps Standard Series

Beta Clamps are ideal for clamping pipe, tube, hose or electric cable. Unique clamp design offers shock absorption, vibration dampening and noise reduction. Rated up to 1500 PSI without dynamic loads. (Heavy duty models available for operations with pressure surges and wide temperature fluctuations).



Clamp assemblies include hex bolts, polypropylene cushions and weldable steel bases. (Z-Strut and Din Rail bases also available). Polypropylene cushions are rated from -20° to +195° F.

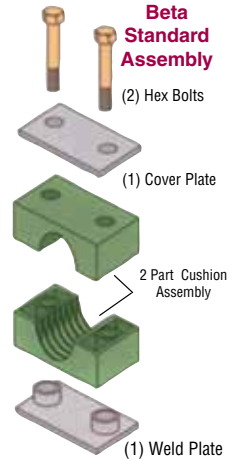

Pipe/Tubing

Part No.	O.D. Tube Size	O.D. Pipe Size
ZS S1004S	1/4" (.250)	-
ZS S1006S	3/8" (.375)	-
ZS S1007S	-	1/8" (.405)
ZS S2008S	1/2" (.500)	-
ZS S2009S	-	1/4" (.540)
ZS S2010S	5/8" (.625)	-
ZS S2011S	-	3/8" (.675)
ZS S3012S	3/4" (.750)	-
ZS S3014S	-	1/2" (.840)
ZS S3015S	7/8" (.875)	-
ZS S3016S	1" (1.00)	-
ZS S4017S	-	3/4" (1.050)
ZS S4018S	1-1/8" (1.125)	-
ZS S5020S	1-1/4"	-
ZS S5021S	-	1" (1.315)
ZS S5024S	1-1/2" (1.500)	-
ZS S5027S	-	1-1/4" (1.660)
ZS S6028S	1-3/4" (1.750)	-
ZS S6030S	-	1-1/2" (1.900)
ZS S6032S	2"	-
ZS S7038S	-	2"

*** NOTE: 10% Discount for 50+ Assorted Clamps on Order. 15% Discount on 100+ Assorted.**

Alpha Series™ CushionClamps


Alpha Series Cushion Clamps: U-bolt assembly secures pipe runs to any flat surface. U-bolts can be used as a full contact hanger. Assemblies consist of Thermoplastic Cushion and Electro-galvanized U-bolt with nylon insert locknuts. Stainless bolts also available.



Part No.	Nominal Pipe Size
ZS UB12PA	1/2"
ZS UB34PA	3/4"
ZS UB1PA	1"
ZS UB114PA	1-1/4"
ZS UB112PA	1-1/2"
ZS UB2PA	2"
ZS UB3PA	3"
ZS UB4PA	4"
ZS UB6PA	6"



Mounting Channel Struts



Mounting Channel is available in 1-5/8" wide. Construction is galvanized or 304SS steel.

Channel is designed to be mounted to horizontal or vertical surfaces. Clamps then hold pipe, hose or tubing securely to the channel.

Part No.	Channel Only	Width	Height	Length
KE PS200SS	304SS	1-5/8"	1-5/8"	20'
KE PS200EH	Galvanized	1-5/8"	1-5/8"	20'