



Jetter Reels

— Rated to 3000 PSI —

Hand Carry Jetter Reel




H16-1416



No. **H16 Hand Carry Hose Reel** for pipe and drain cleaning applications. Ideal for jetting hoses up to 1/4". Rated to 3,000 PSI. Easily holds up to 200' of 1/4" I.D. hose. Tension brake is included. Manual, hand-crank design. Dimensions are 18-3/4" high x 12-1/2" wide x 14-3/4" deep.

Part No.	Description	Wt.
HN H16-1416	Hand Carry Jetter Reel	18 lbs.

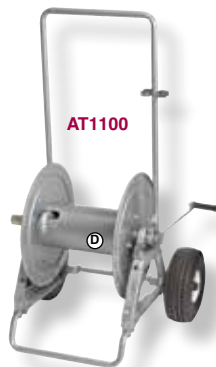

AT1100

Portable Jetter Reel

No. **AT1100 Portable Jetter Reel** is ideal for jetting hoses from 1/4" to 1/2" I.D. Rated to 3,000 PSI. Hand crank rewind. Standard with pneumatic tires and cam lock brake. One-piece base and removable handle. All steel construction. Swivel is 1/2" FPT and is rated to 3,000 PSI. Capacity is 350' of 1/4", 275' of 3/8" and 175' of 1/2" I.D. hose. Dimensions with handle installed are 21-1/2" wide x 22" deep x 39" high.



Part No.	Description	Wt.
HN AT1100	Portable Jetter Reel.....	47 lbs.



Jetter/Sewer Reels

HANNAY Reels for Jetter and Sewer hoses from 3/8" to 1" I.D. Ideal for pipe and drain cleaning. All steel construction with chain and sprocket drive on hydraulic or electric powered reels. Charcoal gray is standard paint finish but other colors are available to meet you specific needs.

Series 1500


Series 1500 Reels are available in Hand Crank, 12-Volt motor or hydraulic motor. Swivels are 1/2" FPT and are rated to 3,000 PSI. Reels will hold up to 400' of 3/8" or 300' of 1/2" I.D. hose. Dimensions are 28-1/2" wide x 19" deep x 19" high.

Part No.	Description	Wt.
HN 1526-17-18	Hose Reel, Hand Crank	31 lbs.
HN E1526-17-18	Hose Reel, 12-Volt Motor	49 lbs.
HN HD1526-17-18	Hose Reel, Hydraulic Motor	46 lbs.
HN HGK15	Hose Guide, Factory Installed.....	12 lbs.
HN	C Roller Assembly, Factory Installed	15 lbs.
HN HS3	Hose Stop as Option.....	-



E1526-17-18

HS3 Hose Stop (Optional)

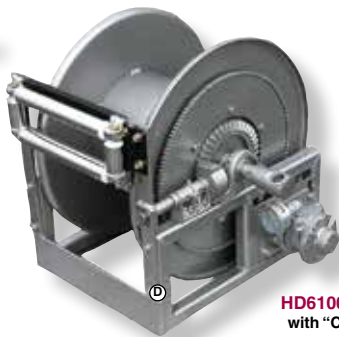

HD6100 Series with "C" Roller

Series 6100

Series 6100 reels are standard with Hydraulic Motors. (12-Volt and pneumatic are also available). Swivels are 1/2" FPT and are rated to 5,000 PSI.

No. **6122-23-24** will hold up to 600' of 3/8" or 300' of 1/2" I.D. hose. Dimensions are 23-1/4" deep x 26-1/4" wide x 24" high.

No. **6122-25-26** will hold up to 750' of 3/8" or 450' of 1/2" I.D. hose. Dimensions are 25-1/4" deep x 26-1/4" wide x 26" high.

Part No.	Description	Wt.
HN HD6122-23-24	Hose Reel, Hydraulic Motor	164 lbs.
HN HD6122-25-26	Hose Reel, Hydraulic Motor	175 lbs.
HN	C Roller Assembly, Factory Installed	15 lbs.
HN HS3	Hose Stop as Option.....	-

HS3 Hose Stop (Optional)


Series 6200

Series 6200 reels are standard with Hydraulic Motors. Swivels are 1" FPT and are rated to 3,000 PSI. "A" Series Bottom Roller Assembly is also included with these models.

No. **6222-39-40-16** will hold up to 500' of 3/4" or 350' of 1" I.D. hose. Dimensions are 39-1/2" deep x 29" wide x 40" high.

No. **6224-45-46-16** will hold up to 900' of 3/4" or 500' of 1" I.D. hose. Dimensions are 45-1/2" deep x 31" wide x 46" high.

Part No.	Description	Wt.
HN HD6222-394016	Hydraulic Drive Reel	520 lbs.
HN HD6224-454616	Hydraulic Drive Reel	610 lbs.
HN	C Roller Assembly, Factory Installed	15 lbs.
HN HS3	Hose Stop as Option.....	-

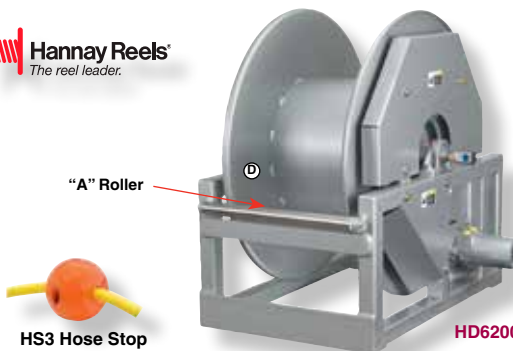

HD6200 Series

HS3 Hose Stop (Optional)