

MYERS® Two-Stage, Straight Centrifugal Pumps

Heads to 400 ft. (175 PSI) & Flows to 140 GPM

Myers Two Stage Pumps are designed and built for rugged continuous-duty service. Applications include cold and hot water circulation, irrigation, fluid transfer, boiler feed, car/truck wash, water reclamation, booster service and supply water. Heads to 400 ft. (175 PSI) and flows to 140 GPM.


Pump casing is high tensile gray iron. Pump shaft is 416 stainless. Mechanical shaft seal is rated to 75 PSI inlet pressure and 220° F. Pumps are pedestal style without motors but we can supply motor, base and drive couplings if required. Drive speed is 3450 RPM. Pump shafts are 1-1/4".



**12C Series
Two Stage
Centrifugal Pumps**



MYERS®

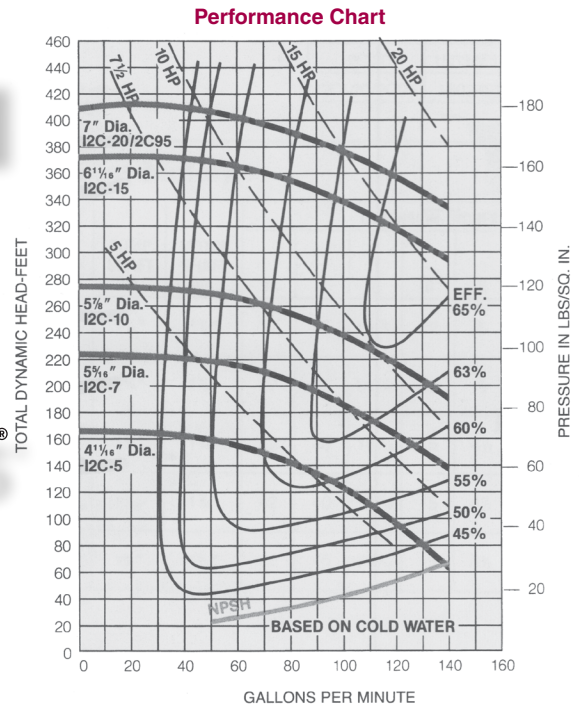


12C Series Pumps

Part No.	Flow Rate	Impeller	Inlet	Outlet	Wt.
MY 12C-5	80 GPM @ 60 PSI	4-11/16" Bronze	2"	1-1/2"	125 lbs.
MY 12C-7	100 GPM @ 80 PSI	5-5/16" Bronze	2"	1-1/2"	125 lbs.
MY 12C-10	120 GPM @ 100 PSI	5-7/8" Bronze	2"	1-1/2"	125 lbs.
MY 12C-15	140 GPM @ 130 PSI	6-11/16" Bronze	2"	1-1/2"	125 lbs.
MY 12C-20	140 GPM @ 150 PSI	7" Bronze	2"	1-1/2"	125 lbs.
MY 12C1-20/2C95	140 GPM @ 150 PSI	7" Cast Iron	2"	1-1/2"	125 lbs.

MYERS® Straight Centrifugal Pumps

Myers CT Series Straight Centrifugal Pumps are an excellent choice for liquid transfer, booster service, irrigation, circulation, sprinkling systems and general industrial service. Flows to 95 GPM and pressures to 55 PSI and 140 ft.

Features: Heavy Duty cast iron construction • Back pull out design for easy serviceability • Double ball bearing, continuous duty motors, ODP 60hz • Corrosion-resistant composite impeller, (Stainless also available) • CSA listed • Single or Three phase motors • Carbon/ceramic seals • Discharge can be rotated to 4 positions • Rated to 140° F. (Higher temperature models available).

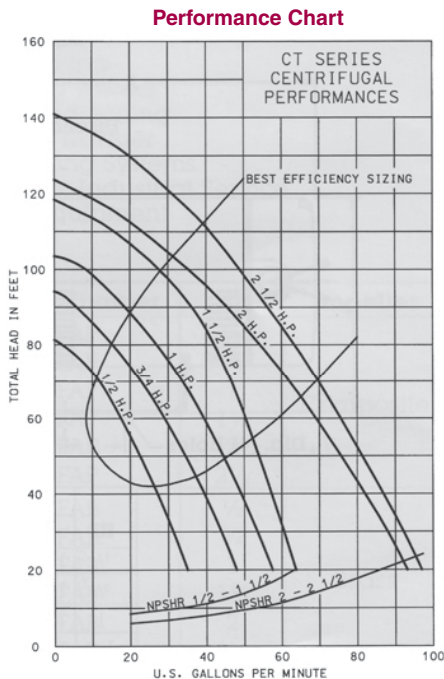

**Flows to 95 GPM &
Pressures to
55 PSI and 140 ft.**

MYERS®



**CT Series
Straight
Centrifugal Pumps**



CT Series Pumps

Part No.	HP	Phase	Voltage	Maximum Flow	IN	Out	Wt.
MY CT07	3/4	1	115/230	48 GPM	1-1/4"	1"	32 lbs.
MY CT10	1	1	115/230	57 GPM	1-1/4"	1"	35 lbs.
MY CT15	1-1/2	1	115/230	64 GPM	1-1/4"	1"	40 lbs.
MY CT20	2	1	115/230	92 GPM	1-1/2"	1-1/4"	57 lbs.
MY CTJ153	1-1/2	3	208/230/460	64 GPM	1-1/4"	1"	40 lbs.
MY CT203	2	3	208/230/460	97 GPM	1-1/2"	1-1/4"	57 lbs.