



# Foamer System • Fog Unit


## DEMA Doorway Foamer Systems

**Foam-IT Doorway Systems** from Dema create a foam spray to apply disinfectants and sanitizers to floors for foot traffic, forklifts, supply carts, etc. Can be easily set up for walk-through or drive-through doorways. Control timer allows for spray time as required. Available in one, two or three nozzle systems. All units draw from your concentrated chemical drums or pails, 8' feed supply tube included. Mix rates are adjustable from 38:1 to 183:1.

Units are activated when plugged in and will foam product based on timer setting for your application. Process is to keep foam on the floor continuously for shoes, boots or other traffic. As foam dissipates, system will reapply. Systems must be unplugged when use is not required.

Single nozzle system has effective coverage of 9' x 5' floor area. Double nozzles have 8' x 4' x 2 nozzles. Triple has 6' x 3' x 3 nozzles.

Control box can be located up to 100' from doorways if required. 50' of 1/2" Pump to nozzle tubing included per nozzle. Single, double or triple Stainless steel foam nozzles are designed to work simultaneously. Available with Santoprene, Viton® or Kalrez pumps as required. *(Note: Compatibility of chemical products should be reviewed for pump type prior to use).* Systems require 5-10cfm air at 40-80 PSI and 2 GPM water at 10-100 PSI. Standard with 120 volt, 60hz plug and cord. Systems are rated to 100° F fluid temperatures.

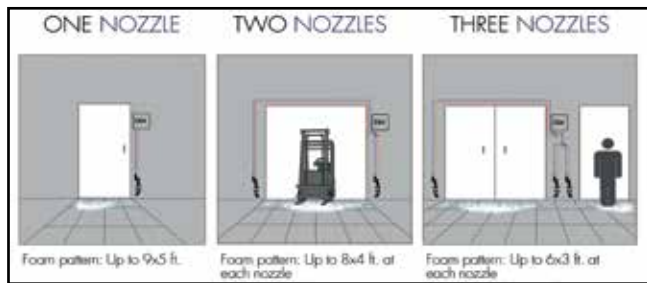

Part No.	Pump	Nozzles	Wt.
DE 900-DS4	Santo	1	23 lbs.
DE 900-DS4-2	Santo	2	28 lbs.
DE 900-DS4-3	Santo	3	33 lbs.
DE 900-DS4V	Viton®	1	23 lbs.
DE 900-DS4V-2	Viton®	2	28 lbs.
DE 900-DS4V-3	Viton®	3	33 lbs.
DE 900-DS4K	Kalrez	1	23 lbs.
DE 900-DS4K-2	Kalrez	2	28 lbs.
DE 900-DS4K-3	Kalrez	3	33 lbs.

Viton® is a registered trademark of DuPont Performance Elastomers

## DEMA Portable Fog / Mist Units



**Fog-It Systems** from Dema are designed to create a fogging mist for applying Disinfectants and Sanitizers to rooms or equipment. 12gallon portable tanks feature 2 or 3 nozzles that create a 15 micron droplet that can cover up to 38,000 cubic feet in approximately 1 to 1-1/2 hours. *(Note: area covered and run time may vary with humidity, air flow and product used).* Pre-mix your solution in the holding tank for the application rate required. Natural color tanks for product level visibility. 10" non-marking wheels. Standard with Santoprene fitted pump but Viton® or Kalrez are available. All models are rated to 100 PSI and 100° F.

**910N-Fog2** features (2) fixed nozzles. Air requirements are 7cfm at 50 PSI. Flow rate is 3.7 gallons per hour at each nozzle. Full tank takes about 1-1/2 hours to empty while fogging.

**910N-Fog3** features (3) nozzles on a telescoping arm with a height adjustment of 3-1/2' to 8'. Air requirements are 9cfm at 50 PSI. Flow rate is 3.7 gallons per hour at each nozzle. Full tank takes about 1 hour to empty while fogging.



910N.FOG2



910N.FOG3

Part No.	Nozzles	Wt.
DE 910N.FOG2	2 Fixed	37 lbs.
DE 910N.FOG3	3 Adjustable	49 lbs.



**Reliable & Consistent**

*"Every time I need anything for my vacuums I use Dultmeier Sales. They are fast and efficient and I will receive my items 3 days later. I have used this company many many times and they always take great care of me.*

Todd