



## TMSRL1500

The **TMSRL1500** rotary lobe vacuum booster pump is a workhorse in the high-level CFM range. It's designed to footprint with the Busch WV-1500 model and TMS parts are interchangeable with Busch. Innovative, state-of-the-art quick-change coupling eliminates the need to remove the motor to change the coupler element. No more lubricating the shaft seal with oil cup required. This product line is not intended to transfer fluids – air/ gases only. *TMS offers an exchange program for the Busch WV-1500. Call Today for more details.*


### Features:

- Max CFM: 1060
- HP: 7.5
- Billet Aluminum vs Cast Aluminum for the Dam Wall (reduces metal fatigue)
- Metal Oil Lines and Fittings vs Plastic
- One-piece lip seal cartridge vs two-piece design
- Rotors made from solid USA Cast Steel (longer life/better balance)

### Technical Specs:

- Motor: 230/460V, 3PH, TEFC, 7.5HP
- Max Differential Pressure: 32 Torr
- Motor Speed: 3600RPM
- Oil Capacity: 3.2 Qts.
- Dry Weight: 634 lbs.
- Dimensions (L x W x H): 46" x 20 1/4" x 21 1/8"
- Inlet/Outlet: 4" ANSI Flange \*Optional 90 Degree Hose Barb Elbows Available

\*Performance Data based on ambient conditions of 14.7PSIA and 70°F and tolerance of ±10%.

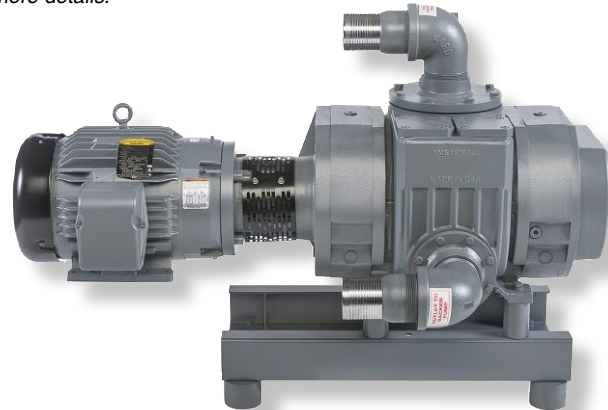

Part No.	Description
TM SRL1500	RL1500 Blower, 7.5HP, 4IN ANSI Flange Ports

## TMSRL2000

The **TMSRL2000** rotary lobe vacuum booster pump is a workhorse in the high-level CFM range. It's designed to footprint with the Busch WV-2000 model and TMS parts are interchangeable with Busch. Innovative, state-of-the-art quick-change coupling eliminates the need to remove the motor to change the coupler element. No more lubricating the shaft seal with oil cup required. This product line is not intended to transfer fluids – air/ gases only. *TMS offers an exchange program for the Busch WV-2000. Call Today for more details.*


### Features:

- Max CFM: 1530
- HP: 10
- Billet Aluminum vs Cast Aluminum for the Dam Wall (reduces metal fatigue)
- Metal Oil Lines and Fittings vs Plastic
- Billet Aluminum Motor Adapter vs Cast Aluminum (reduces oxidation)
- One-piece lip seal cartridge vs two-piece design
- Rotors made from solid USA Cast Steel (longer life/better balance)

### Technical Specs:

- Motor: 230/460V, 3PH, TEFC, 10HP
- Max Differential Pressure: 32 Torr
- Motor Speed: 3600RPM
- Oil Capacity: 5 Qts.
- Dry Weight: 1200 lbs.
- Dimensions (L x W x H): 54" x 22 1/4" x 25"
- Inlet/Outlet: 6" ANSI Flange \*Optional 90 Degree Hose Barb Elbows Available

\*Performance Data based on ambient conditions of 14.7PSIA and 70°F and tolerance of ±10%.

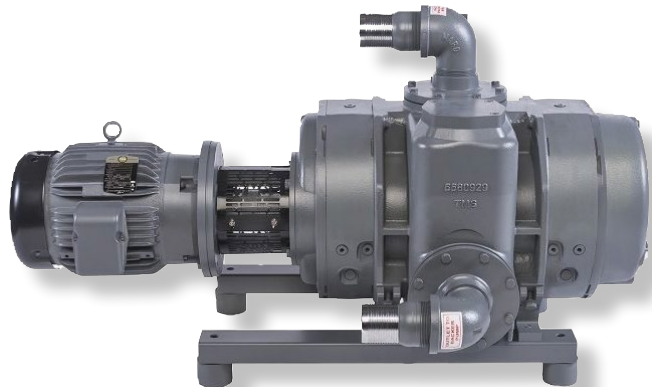

Part No.	Description
TM SRL2000	RL2000 Blower, 10HP, 4IN ANSI Flange Ports



## Service and Production Department



Dultmeier Sales engineers and builds a large variety of pumping systems, including "Custom Packages" to meet your unique needs. We build centrifugal, gear, diaphragm, fuel and DEF pumping systems. We also build Liquid De-Ice & turf / tree sprayers, chemical inductors, manifolds, load arm systems & more.