Model 215A

Kingston Horizontal Check Valve




Features

- 1/8", Plugged Unloader Port, Standard
- · Cast Red Brass Body
- Designed for Lubricated or Non-Lubricated Air Compressors
- Designed Specifically for Use in Horizontal Pipe Lines
- Features a Glass-Filled Teflon Disc for Durability in High/Low Temperature Applications
- Precision Machined with Soft Seat
- Stainless Steel of Music Wire Spring Depending on Set Pressure
- Tested in National Board Approved Quality Assurance Process

	Model	Inlet Size	Outlet Size	(Height)	Dimensions (Width)	(Hex)	Set Pressure Range (PSIG)	Approx. Shipping Wt.	Max. Temp (°F)
	215A	1/4" NPT	1/4" NPT	1-5/16"	1-11/16"	3/4"	1-400 1-250	4 oz.	350°F
		3/8" NPT	3/8" NPT		2-1/2"	1-1/16"		11 oz.	
		1/2" NPT	1/2" NPT		2-11/16"			15 oz.	

Materials

No.	Part Name	Materials
1	Body	Brass
2	Сар	Brass
3	Disc	Teflon
4	Spring	Stainless Seel

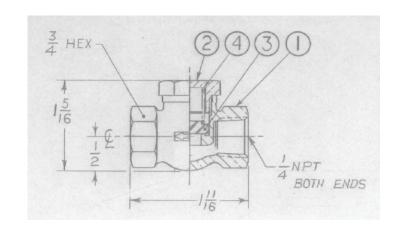

Kingston Model 215A Horizontal Check Valve

Flow Capacity Information




Fig. 215 - 3/8" | Second | Se

Fig. 215 - 1/2"






Fig. 215 - 1/2"



Ordering Information



Product Notes

Storm Manufacturing Group, Inc. reserves all rights. Product specifications and designs are subject to change without notice.

The information contained herein by Storm Manufacturing Group (SMG) is provided in good faith and as a product guide only. Further, SMG makes no representation as to the completeness or accuracy of the information contained herein. Any person or persons using the information contained herein must exercise their own judgement and consider all local, regional, national and global safety standards in evaluating valve selection options. Final application design and integration of Kingston Products are the sole responsibility of the end user.

