

flexFLO™ 100 HD (100 CKBK HD)

Heavy-duty, kink- resistant, suction and discharge hose.

The ultimate industrial solution for challenging environments. This heavy-duty suction and discharge hose combines flexibility with unparalleled durability, making it ideal for demanding construction and dewatering applications. Engineered with cold weather PVC and a robust, enlarged helix, the KanaLite HD ensures smooth operation in the coldest conditions.



FEATURES

Lightweight and flexible hose constructed with cold weather PVC, making it perfect for the most demanding cold conditions. External helix provides for easy drag. Helix is 30% larger than KanaLite CW. Rated for both suction and discharge. Clear sidewall permits visual check of material flow.

APPLICATIONS

Designed for construction application, dewatering

TEMP. RANGE

-40°F to 140°F

CONSTRUCTION


Cold weather PVC, rigid and enlarged PVC helix, smooth bore, corrugated O.D.

ACCESSORIES

Banding coil, Powerlock clamp

NOTE

Not a food-grade hose

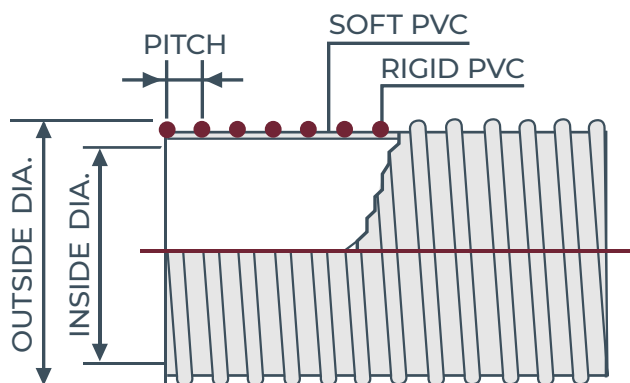

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
6	6.67	0.78	9.0	20.0	28.0	3.58	100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*