




KAPPA-33/43/53 Medium Pressure Diaphragm Pump

KAPPA-33/43/53 3-cylinder, medium pressure diaphragm pumps are excellent choices for various horticulture, agricultural, lawn care, nursery, pest control and turf spraying applications. They are also effectively used in other applications such as aircraft de-icing, hydrostatic testing and cleaning. The KAPPA-33/43/53 pumps come standard with mounting rails and a 25mm solid keyed shaft.

KAPPA-33/43/53 pumps are constructed of anodized aluminum with anodized aluminum and stainless steel liquid handling parts. Control valve and pressure gauge are standard on all models.

Drive options include 5071.75 4-6.5 HP gear reduction.

For applications not listed, please consult UDOR U.S.A.

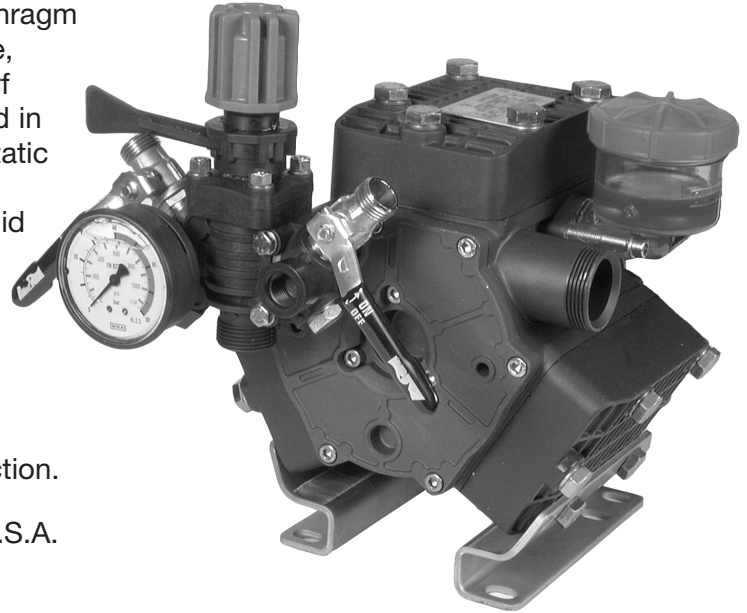

SPECIFICATIONS

Maximum Flow	
KAPPA-33	8.5 GPM
KAPPA-43	10.5 GPM
KAPPA-53	12.5 GPM
Maximum Pressure	560 PSI
Maximum RPM	540 RPM
Maximum Temperature	140° F
Inlet Port (Hose Barb) K-33 & 43	1"
* Inlet Port Hose Barb K-53	1-1/4"
Outlet Ports (Hose Barb, Ball Valve Controlled)	1/2" (2)
Bypass (Hose Barb)	3/4"
Dimensions	L-9.25" x W-11" x H-10"
Weight	29 lbs.
Diaphragm Material	
Standard	DESMOPAN
Optional	BUNA-N

NOTE - Protect pumps from freezing. If freezing conditions exist, flush pump and system with a 50/50 mixture of anti-freeze and water.

UDOR U.S.A., INC.

500 Apollo Drive
Lino Lakes, MN 55014
TEL. (651) 785-0666
FAX (800) 732-2670
www.udorusa.com

