FLOMAX® 8 SS Double

2" x 2" 316 Stainless Steel, Double Seal, Self Priming

The Flomax 15 Stainless Steel Double Seal pump is designed to handle your toughest applications with ease. This 316 investment cast stainless steel self priming pump offers premium corrosion resistance. The presence of grease in the seal allows the pump to operate in a dry run condition, increasing hours of running while protecting the seal from corrosive fluids. The barrier fluid accumulator pressurizes the seal cavity to a higher pressure thus eliminating the possibility of the process fluid being transferred to enter the seal chamber. Self Priming SS Double seal pumps have proven success in railcar loading/unloading, fertilizer transfer, DEF, Corrosive chemical transfer, waste water transfer and many more applications!


SPECIFICATIONS:

Discharge	2" ANSI 4-bolt flange connection
	Part number for Optional Discharge Flange Kit: 36607
Suction	2" NPT 150# Class Flat Flange
Flow	Up to 170GPM
Head Feet	up to 130TDH
Impeller	4.88 Max Diameter Semi open impeller
Drive Options	Close coupled to 145TC
	Close Coupled to 184C
	Close Coupled to 56C
	Engine Mount
	Hydraulic Drive
	Pedestal Mount
	PumPAK® (without motor)
Seal	Type 31 Silicon Carbide/ Silicon Carbide

Application:


- Agricultural
- Commercial
- Industrial
- OEM

FLOMAX® 8 SS Double Seal

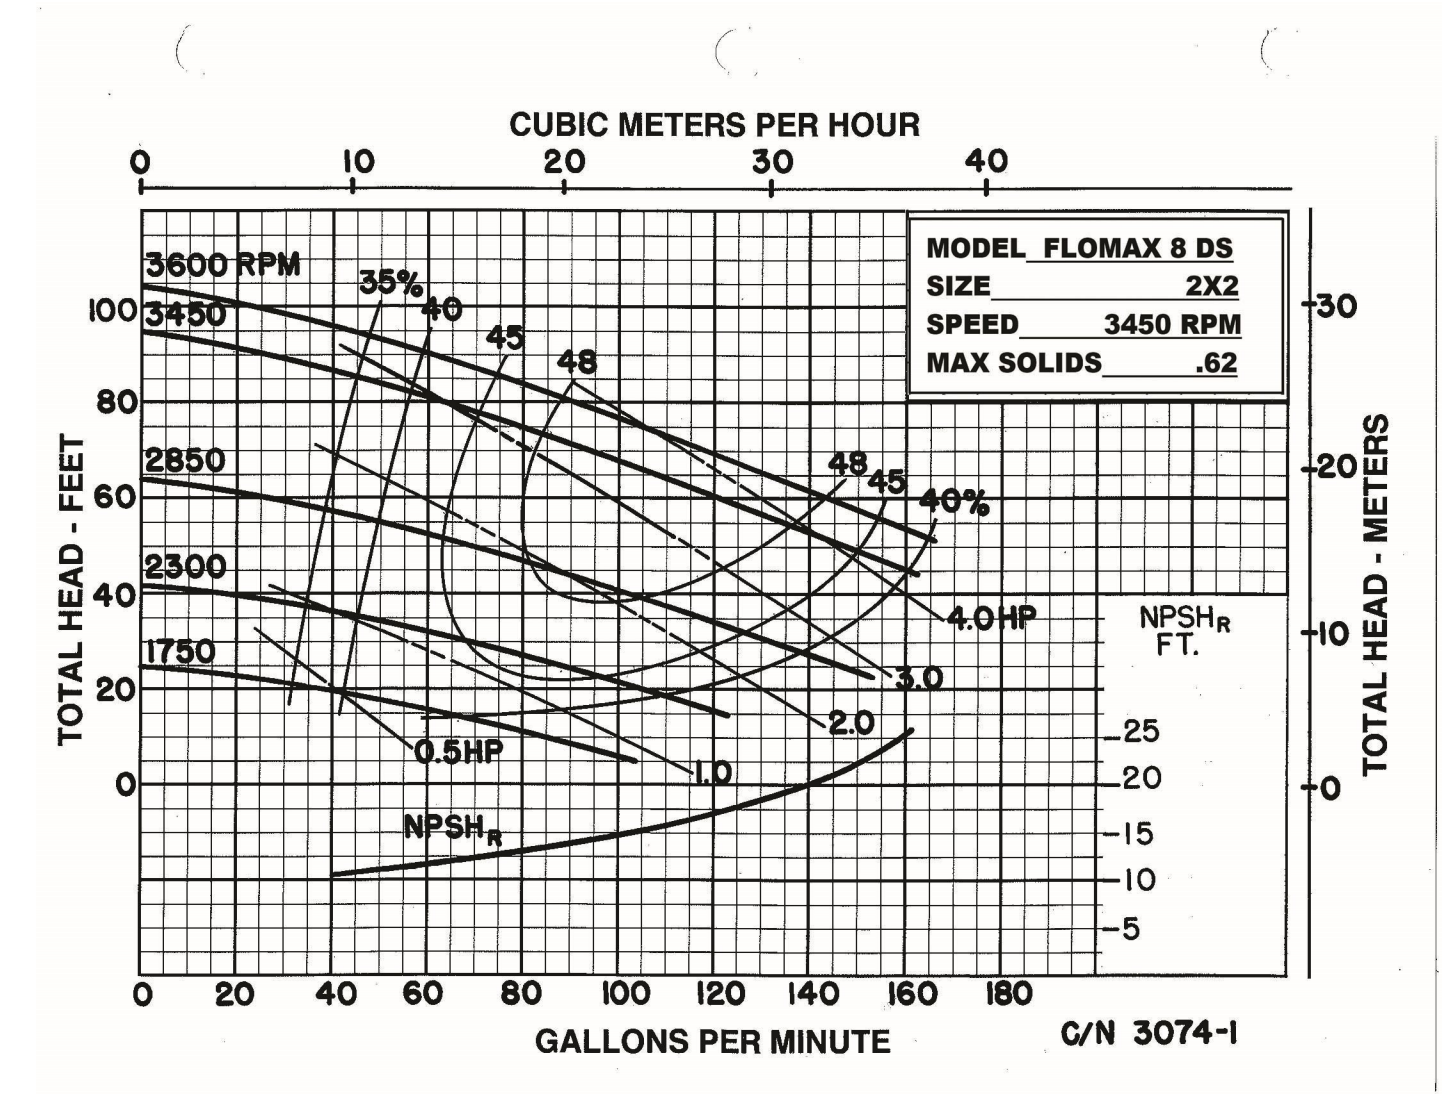


34800 BENNETT • FRASER, MI 48026-1686
(586) 293-8240 • FAX (586) 293-8469
(800) 563-8006 • www.mppumps.com

FLOMAX® 8 SS Double Seal

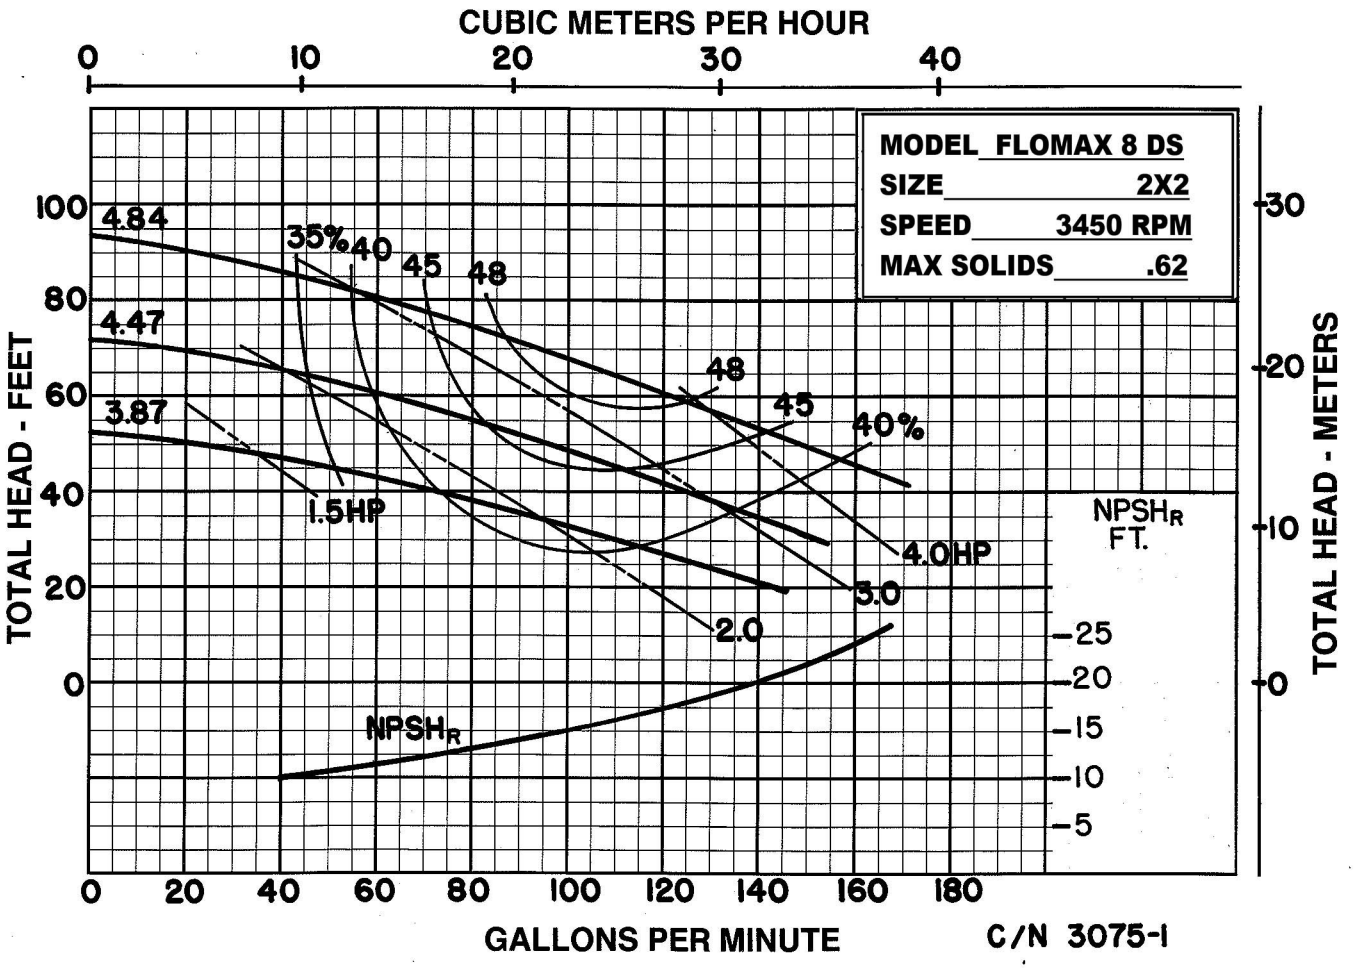

34800 BENNETT • FRASER, MI 48026-1686
(586) 293-8240 • FAX (586) 293-8469
(800) 563-8006 • www.mppumps.com


FLOMAX® 8 SS Double Seal

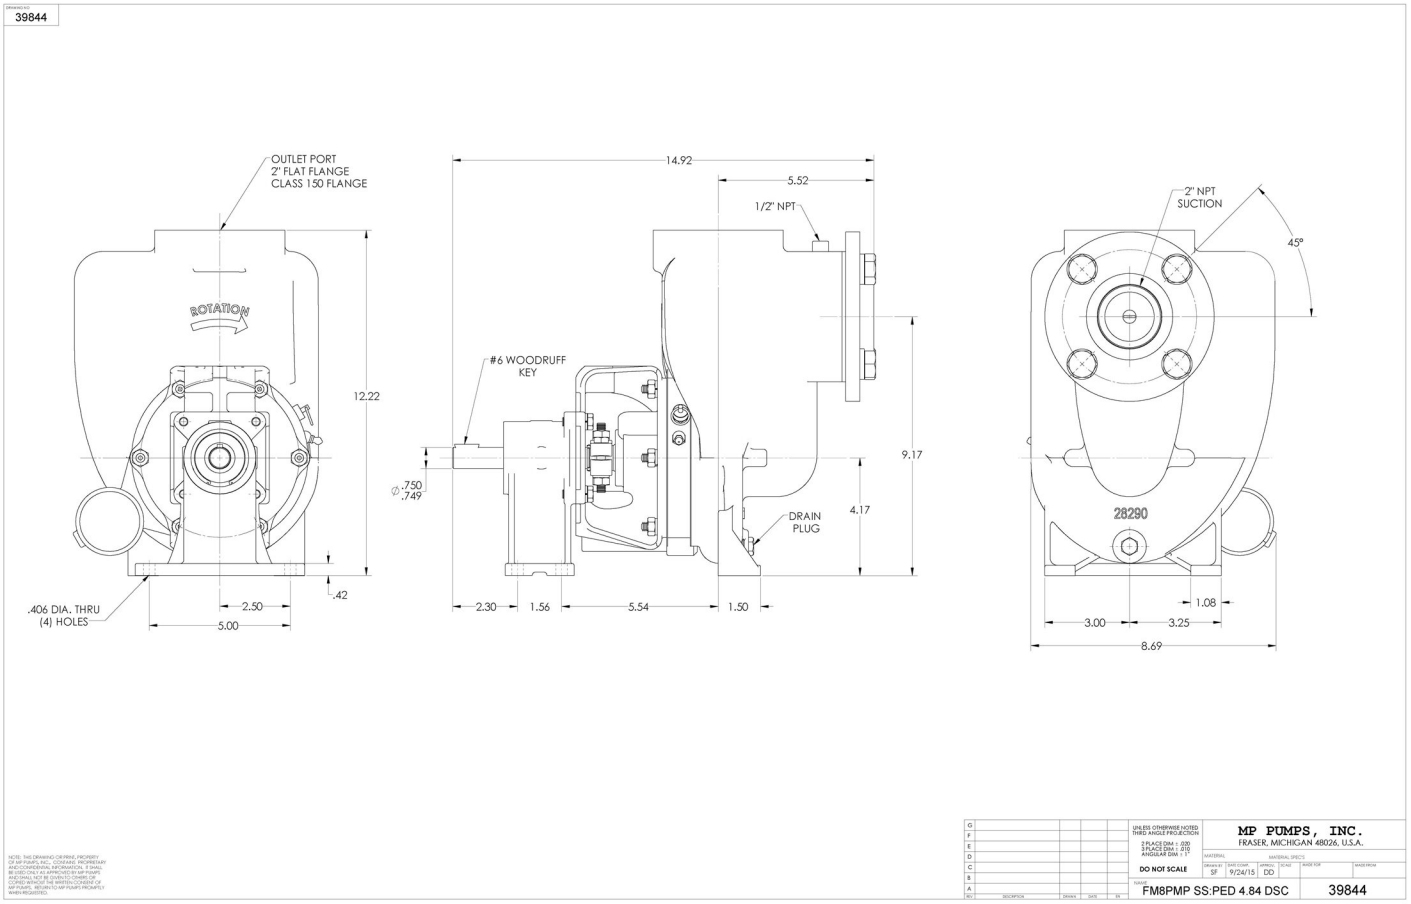

34800 BENNETT • FRASER, MI 48026-1686
(586) 293-8240 • FAX (586) 293-8469
(800) 563-8006 • www.mppumps.com

FLOMAX® 8 SS Double Seal

39844

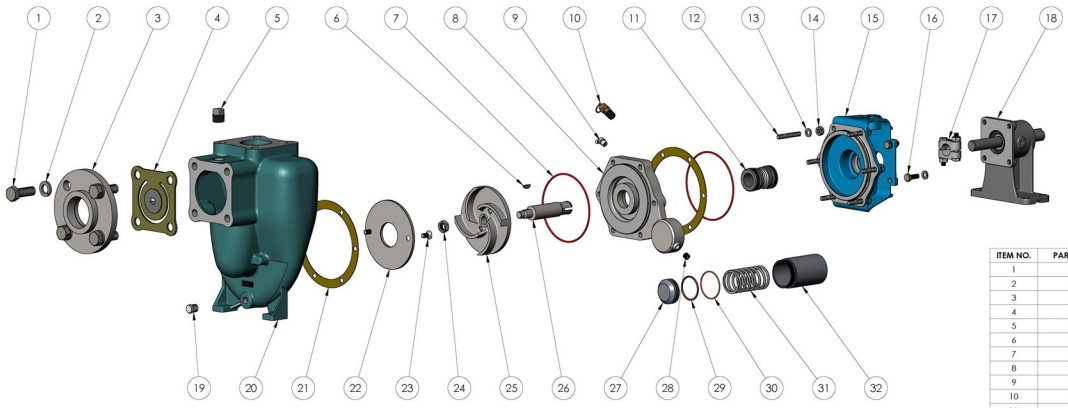

ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	QTY.
1	36606	CAPSCREW 5/8-11X1.75	304 STAINLESS STEEL	4
2	26853	LOCKWASHER 5/8	304 STAINLESS STEEL	4
3	36960	FLANGE	316 STAINLESS STEEL	1
4	37170	FLAPPER ASSEMBLY	SS/VITON	1
5	22656	PIPE PLUG	303 STAINLESS STEEL	1
6	21163	WOODRUFF KEY 5/8x5/32	304 STAINLESS STEEL	1
7	34555	O-RING AS-568-158	VITON	2
8	39842	ADAPTER	316 STAINLESS STEEL	1
9	22208	ZERK FITTING 1/8 NPT	STEEL ZINC PLATED	1
10	31733	RELIEF VALVE 1/4"NPT	BRASS	1
11	33176	SEAL ASSY:1" DBL	SIL/SIL	1
12	33201	STUD 5/16-18X2.13	304 STAINLESS STEEL	6
13	21238	LOCKWASHER 5/16 X 18	304 STAINLESS STEEL	10
14	21284	HEXNUT: 5/16-18X1/2X17/64	304 STAINLESS STEEL	6
15	22247	ADAPTOR	CAST IRON	1
16	21278	HEX BOLT 5/16-24 X.88	304 STAINLESS STEEL	4
17	23002	CLAMP ASSEMBLY	303 STAINLESS STEEL	1
18	26141	PEDESTAL ASSEMBLY	CAST IRON	1
19	21267	PIPE PLUG HH 1/4 NPT	316 STAINLESS STEEL	1
20	28276	HOUSING	STAINLESS STEEL	1
21	28704	GASKET	GORE-TEX	2
22	27978	WEAR PLATE	316 STAINLESS STEEL	1
23	28742	SCREW FHS - 5/16-18	316 STAINLESS STEEL	2
24	35599	HEX JAM NUT	316 STAINLESS STEEL	1
25	39839	IMPELLER	316 STAINLESS STEEL	1
26	33205	DRIVE SL SS: 3/4 FLO S SDS	316 STAINLESS STEEL	1
27	38360	PISTON	ALUMINUM T-3 2011	1
28	30824	PIPE PLUG 1/8" NPT	STEEL	1
29	38362	O-RING AS-586-129	VITON	1
30	38363	O-RING AS-586-032	VITON	1
31	38358	SPRING	MUSIC WIRE	1
32	38361	RESERVOIR	ALUMINUM T-3 2011	1

NOTE: THIS DRAWING OR PRINT, PROPERTY OF MP PUMPS, INC., CONTAINS PROPRIETARY AND/OR CONFIDENTIAL INFORMATION. IT SHALL BE USED ONLY AS APPROVED BY MP PUMPS AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN CONSENT OF MP PUMPS. RETURN TO MP PUMPS PROMPTLY WHEN REQUESTED.

UNLESS OTHERWISE NOTED THIRD ANGLE PROJECTION
2 PLACE DIM ± .020
3 PLACE DIM ± .010
ANGULAR DIM ± 1°
DO NOT SCALE

MP PUMPS, INC.
FRASER, MICHIGAN 48026, U.S.A.

MATERIAL SPEC'S

DRAWN BY	DATE COMP.	APPROV.	SCALE	RANGE FOR	MADE FROM
SF	9/24/15	DD			

NAME: FM8PMP SS:PED 4.84 DSC

39844

34800 BENNETT • FRASER, MI 48026-1686
(586) 293-8240 • FAX (586) 293-8469
(800) 563-8006 • www.mppumps.com