



**Power Specifications
(standard equipment)**

Vacuum Motors: Lamb, two stage, by-pass cooled motors, 7 amp (oper. avg., each)
Input: 15 amp, 120 VAC/60 Hz (20 amp. circuit required)
Airflow: Net 194 CFM (open), 87" H2O (static)
Timer: Electronic, Dual outputs, 1 to 255 coins, 2 sec. to 8.5 min. per coin
Acceptor: Mechanical with coin return & catcher
Filters: 4 bags, 15 sq. feet total area, two access doors
Hose: Hi-flex, crushable hose, 2 in. by 15 ft. with tool
Tank: 18 Gauge, 304 Stainless Steel with hand-brushed finish, tank 18" x 42" (H)
Vaults: 12 Gauge 304 Stainless steel - Recessed door
Electrical Connection: Integral connection cover, removable for easy access and installation. 20 amp, 120 VAC service required
Mounting: Three mounting lugs for 1/2" bolts. Optional bracket available
Dimensions: 52" (H) x 27" (D) x 20" (W) Ship: 57" (H) x 24" (D) x 24" (W).
 Tank: 18-1/2" O.D., S/S Dome: 20" O.D.
 Poly Dome: 21-1/2" O.D.
Weight: 105 lbs. net, Ship: 150 lbs.

"Power Vac" Stainless Vacuums

Super Suction, Sure-Start Vending, Largest Filter System, Lock-in Security: "Power Vac" vacuums have it all.

- Dual powered with two 1.6 HP motors
- Four-filter design features the industry's largest filter area
- Upper filter access door for quick maintenance
- Electronic Timer for price & time flexibility
- Armored "pin-lock" protects from thieves, weather and vandals
- Colorful decal and design. (Different decal colors available).

"Power Vac" Vacuums are available in three different models for your choosing:

140000 & 10000-3: Coin-op - Brushed Stainless Steel Housing & Dome. **Features:** Drawer Style Coin Box • 2 or 3 Heavy Duty Motors • High Capacity Filter System • Sure-Start, Accurate, Fully adjustable Timers • High Security Coin Vault.

1000DM: Coin-op - Brushed Stainless Steel Housing with *Poly Dome & Light Kit. *(Specify from red, blue, teal, white, yellow & green). (2) 1.6 HP Motors.

10000T: Toggle Switch operated, Brushed Stainless Steel Housing & Dome. (No Timer). (2) 1.6 HP Motors.



INDUSTRIAL VACUUM SYSTEMS

Standard Features: Stainless Steel housing, 18-gauge, 304SS • Stainless steel or Polyethylene Domes • Upper filter door for easy access to filters • (4) Filter design • (2 or 3) 1.6 HP, Lamb motors • 2" x 15' hose • Solid-state IDX electronic timers • Drop-style coin mechanism with coin return • Lower clean-out door for dirt removal • ETL Approved • 12-gauge stainless vault box.

Part No.		Wt.
DY 140000	SS Coin-Op Vacuum, 2 Motor	140 lbs.
DY 100000-3	SS Coin-Op Vacuum, 3 Motor	135 lbs.
DY 1000DM	Poly Dome Coin-op Vacuum	152 lbs.
DY 10000T	Toggle Switch Vacuum	135 lbs.

— F.O.B. Factory —

Air/Vacuum Combo — Double Door —



A combination Air/Vacuum in one unit. Ideal for car washes, convenience stores, truck stops or any highly travelled area. This model features top grade 18-gauge stainless steel that will hold its lustrous finish year after year. Your money is safe in a 10-gauge stainless high security vault box with a completely concealed pin lock for added protection. Standard with (2) coin mechanisms so that both services can be offered to separate customers at the same time. Standard with (2) Doors - Upper door for filter access and lower door for trash removal.

Specifications: Two 1.6 HP vacuum motors • 19" diameter canister • 54-1/2" Height • Weight is 175 lbs. • 115 volt • 3/4 HP air compressor motor delivers up to 90 psi • 25' air hose with gauge and valve • 15' x 2" vacuum hose with cuff.


TIRE INFLATOR SPECIFICATIONS

Air Compressor: Oil-less motor mounted, dual cylinder, thermal protection, safety valve.
Hose: 1/4" I.D. x 25 ft., cut-resistant wire braid.
Pressure: Up to 90 PSI.

Part No.
AA 9420-1G Air/Vacuum Unit



Air Machines

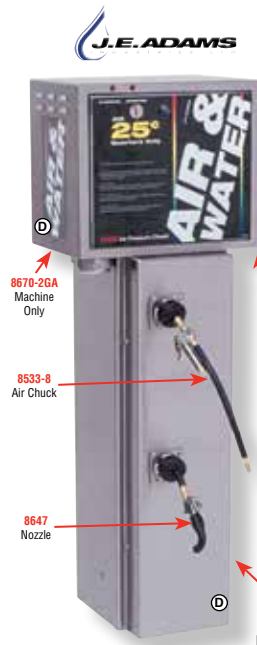

Stainless Steel Air Machines are a great addition to your convenience store, truck stop or car wash. Tough stainless steel construction and good engineering ensures years of dependable service.

Constructed of a high quality 14-gauge stainless steel. These machines have an attractive design and will look like new year after year. Units available with or without base.

Designed with a concealed hinge and high security lock bar system that has been engineered to protect your income. An optional locking coin box allows service to the mechanics of the equipment without access to the money.

Specifications: 1.5 HP oilless, 3.1 SCFM at 90 PSI Compressor • Timer is adjustable up to 10 minutes and 1 to 7 coins • Gauge is heavy-duty bayonet style • Hose is cut resistant 25' x 1/4" wire braid. • Dimensions are 18" W x 16" H x 12-1/2" D.

8670-2WBTA-65
 Machine with base



Part No.	
AA 8670-2GA	Pay Air Machine, Wall Mount
AA 8670-2WGA	Pay Air/Water Machine, Wall Mount
AA 8670-2FGA	Free Air Machine, Wall Mount
AA 8670-2BA/6026	Pay Air Machine with S.S. Base & Reel
AA 8670-2WBTA-65	Pay Air/Water Machine with S.S. Base & Reel .