


Continental NH3 Fittings

Applicator & Nurse Tank Valves

Fill & Vapor Valves

- Top Connect -

B1201 is a HIGH FLOW, manual shut-off valve for applicator and/or nurse tanks. It is designed for use as a filler, vapor, or liquid withdrawal valve. The rugged ductile iron body is an assurance of durability and longer service life. Includes built-in excess flow check assembly (42 GPM).

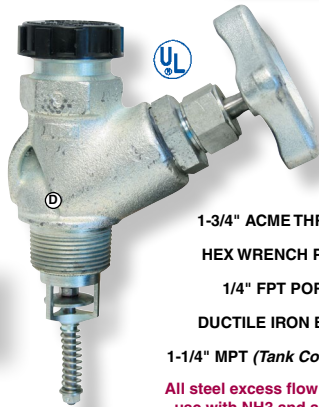

- 1-3/4" ACME THREAD
- HEX WRENCH PADS
- 1/4" FPT PORT
- DUCTILE IRON BODY
- 1-1/4" MPT (Tank Connection)
- All steel excess flow check for use with NH3 and additives.

LIQUID FILL RATE - GPM NH3

DIFFERENTIAL PRESSURE (psi)	5	10	20	30
B-1201 with Mating ACME coupling only	24	38	61	83
B-1201 with 1-1/4" x 12 ft. hose assembly	22	35	52	64

Part No.		10+ DISCOUNT
CN B1201	Top Connected Manual Fill & Vapor Valve. 1-1/4" MPT x 1-3/4" Acme & 1/4" FPT Bleeder Port. Zinc Plated.	5%
CN A2212RK	Repair Kit - Fits A1201 Valve	—

- Discounts Not Assorted -



Visit our office in Omaha, Nebraska

13808 Industrial Road • Omaha, NE 68137
1-800-228-9666 • 1-402-333-1444 • FAX: 1-402-333-5546



Visit our office in Davenport, Iowa

601 West 76th St. • Davenport, IA 52806
1-800-553-6975 • 1-563-386-0930 • FAX: 1-563-386-5448

email: dultmeier@dultmeier.com • website: dultmeier.com



THESE 1200 SERIES VALVES FEATURE:

- Stainless steel stem - Precision ground & polished.
- Ductile iron body - 400 PSI WOG.
- Field proven nylon seat in swivel poppet retainer.
- Teflon stem packing. Positive seal.
- All steel excess flow check for use with NH3 and additives.
- Every valve pressure tested after assembly.
- All 1200 Series parts are interchangeable.

Liquid Withdrawal Valves



B1206E

All steel excess flow check

For Nurse Tanks, Top & Bottom Valves

B1206 Series High Flow Liquid withdrawal valves with 1" FPT or 1-1/4" outlets, for applicators or nurse tanks with excess flow check at 42 GPM.

B1206EBW is 1-1/4" MPT x 1" FPT. **B1206FBW** is 1-1/4" MPT x 1-1/4" FPT. Bottom withdrawal valves. Specially designed for bottom withdrawal connections. Excess Flow check at 42 GPM.

A1406F is a high capacity valve with excess flow check at 42 GPM. 1-1/4" MPT inlet, 1-1/4" outlet, spring loaded hand wheel.

A1406G is 1-1/4" MPT inlet, 1-1/2" FPT outlet. 40% larger area than A1406F. Excess flow check at 45 GPM.

A1507F is 1-1/2" MPT x 1-1/4" FPT. For nurse tank use (not for riser service). Features a fast opening spring loaded bonnet, stainless steel stem and excess flow check. Excess flow check at 60 GPM.

A1507G is 1-1/2" x 1-1/2" FPT with excess flow check at 60 GPM.

A1507GA is 1-1/2" x 2-1/4" ACME outlet with excess flow check at 60 GPM.

A1809BFV (60 GPM) is 1-1/2" MPT x 1-1/2" FPT with excess flow check at 60 GPM.



A1507F



Part No.	Manual Liquid Valves	10+ Discount
CN B1206E	1-1/4"x1" Liquid Outlet Valve (42 GPM)	5%
CN B1206EBP	Same with Internal By-Pass Bonnet Assembly Installed	5%
CN B1206F	1-1/4"x1-1/4" Liquid Outlet Valve (42 GPM).	5%
CN B1206FBP	Same with Internal By-Pass Bonnet Assembly Installed	5%
CN B1206EBW	1-1/4" x 1" FPT Bottom Withdrawal Valve (42 GPM)	5%
CN B1206FBW	1-1/4" x 1-1/4" FPT Bottom Withdrawal Valve (42 GPM)	5%
CN A1406F	1-1/4" High Capacity Tank Valve (42 GPM)	5%
CN A1406G	1-1/4" x 1-1/2" Valve (45 GPM)	5%
CN A1507F	1-1/2" High Capacity Tank Valve (60 GPM)	5%
CN A1507G	1-1/2" x 1-1/2" Valve (60 GPM)	5%
CN A1507GA	1-1/2" x 2-1/4" Valve (60 GPM)	5%
CN A1809BFV	1-1/2" x 1-1/2" High Capacity Valve (60 GPM)	5%

- Discounts Not Assorted -

Riser Valves

- These Valves Are For Riser Use Only -

Part No.	Riser Valves	10+ Discount
CN B1208FRBD	1-1/4" x 1-1/4" FPT Riser Valve (70 GPM)	5%
CN B1208ERBD	1-1/4" x 1" FPT Riser Valve (70 GPM)	5%
CN A1508FRD	1-1/2" x 1-1/4" FPT Riser Valve (95 GPM)	5%

- Discounts Not Assorted -