

# E0700 Truck Wash Pumping Stations

**Truck Wash Pump Stations** are designed for the rigors of high pressure and hot water (up to 165° F). Ideal for truck wash or industrial use. Unique automatic, time-out, shutdown feature allows for operator control at the wand, (starts at pull of the trigger, times out when finished).

Available in **Single** or **Double Stand** assemblies. Motors are single or three phase to meet your needs. U.L. rated electrical panels. All systems are pre-wired, pre-plumbed and ready for hookup. *Built in the USA.*

## STATION FEATURES

- **PUMPS:** Pulley-drive *CAT* or *General/Emperor* Pumps with high temperature seals. 4.8 GPM at either 2300 PSI or 3000 PSI depending on horsepower.
- **ELECTRICAL PANELS:** U.L. rated, demand panels for auto startup, includes hour meters.
- **STAINLESS STEEL** Frames, water supply tanks & pulley/belt guards.
- **MOTORS:** *Baldor* TEFC in single or three phase wired for 230 or 460 volts.
- **SUPPLY TANKS:** Gravity feed, high capacity water tanks, stainless steel with floats.
- **GAUGES:** Glycerin-filled, stainless case for accurate pressure readings.
- **UNLOADER VALVES:** Adjustable pressure relief valves with pressure switches.
- **FRAMES:** Heavy-duty, stainless frames with self-leveling legs.





Pre-wired UL listed electrical panel with solid state components.

Automatic auto shut down panels for operator control at wand.

**Rated Up to 165° F. Water Operating Temperature!!**

**Choice of Pumps**  
 • *CAT* • *Emperor*  
 • Rated to  
 4.8 GPM @ 2300 PSI with 7-1/2 HP,  
 4.8 GPM @ 3000 PSI with 10 HP

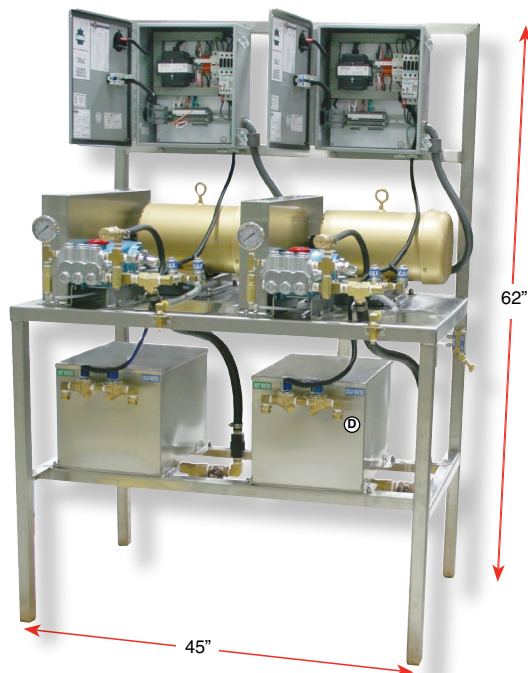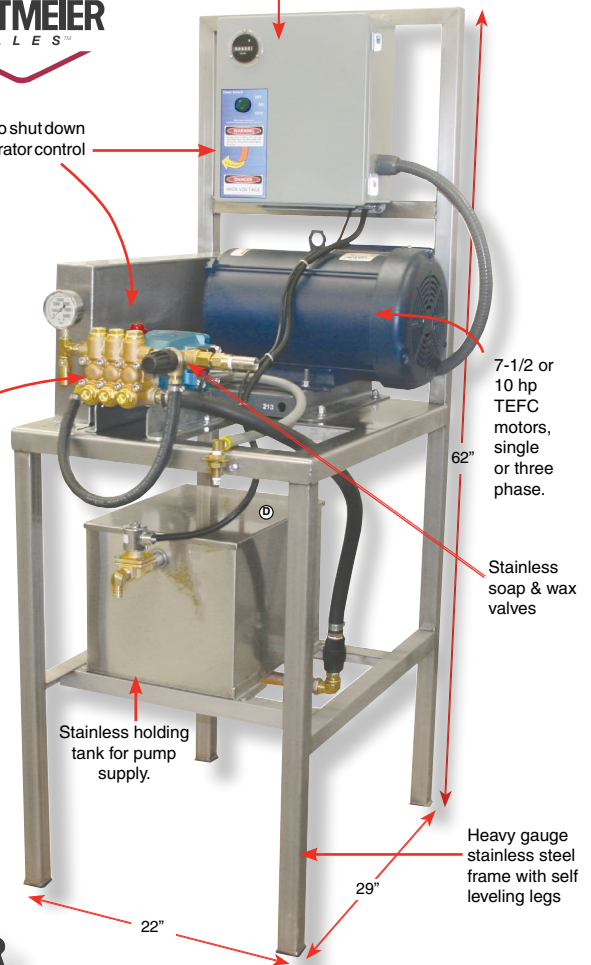

Single Pump Stands				
Part No.	Pump	Motor	Flow/PSI	Wt.
DU PS1701C-PG	Single, Emperor	7.5 HP / 1 PH	4.8 @ 2300	450
DU PS1703C-PG	Single, Emperor	7.5 HP / 3 PH	4.8 @ 2300	450
DU PS1901C-PG	Single, Cat Pumps	7.5 HP / 1 PH	4.8 @ 2300	450
DU PS1903C-PG	Single, Cat Pumps	7.5 HP / 3 PH	4.8 @ 2300	450
DU PS2001C-PG	Single, Cat Pumps	10 HP / 1 PH	4.8 @ 3000	500
DU PS2003C-PG	Single, Cat Pumps	10 HP / 3 PH	4.8 @ 3000	500
Double Pump Stands				
DU PS1701CPG2	Double, Emperor	7.5 HP / 1 PH	4.8 @ 2300	750
DU PS1703CPG2	Double, Emperor	7.5 HP / 3 PH	4.8 @ 2300	750
DU PS1901CPG2	Double, Cat Pumps	7.5 HP / 1 PH	4.8 @ 2300	850
DU PS1903CPG2	Double, Cat Pumps	7.5 HP / 3 PH	4.8 @ 2300	850
DU PS2001CPG2	Double, Cat Pumps	10 HP / 1 PH	4.8 @ 3000	900
DU PS2003CPG2	Double, Cat Pumps	10 HP / 3 PH	4.8 @ 3000	900